

NOTES:

FAIL-SECURE OPERATION (AS SHIPPED)
UNLOCKS WHEN ENERGIZED. IF POWER FAILS THE, STRIKE REMAIN IN UNLOCKED POSITION.

FAIL-SAFE OPERATION (FIELD SELECTABLE)
LOCKS WHEN ENERGIZED. USED IN APPLICATIONS REQUIRING AUTOMATIC UNLOCKING IN CASE OF POWER FAILURE.

AVAILABLE VOLTAGES

12V AC INTERMITTENT DUTY, 12V DC CONTINUOUS DUTY,
16V AC INTERMITTENT DUTY, *16V DC CONTINUOUS DUTY,
24V AC INTERMITTENT DUTY, 24V DC CONTINUOUS DUTY.

(* REQUIRES 16 VOLT ADAPTOR)

CURRENT DRAW

VOLTS	AMPS
12 VDC	.440
12 AC	.163
24 DC	.230
24 AC	.084
16 DC	.458
16 AC	.228

WARNING!

AC INTERMITTENT DUTY SOLENOIDS ARE DESIGNED TO BE ENERGIZED 30 SECONDS AT A TIME MAXIMUM. ENERGIZING FOR LONGER PERIODS WILL DAMAGE THE SOLENOID

WIRING

THE NUMBER OF WIRES WILL VARY DEPENDING ON FEATURES OF THE STRIKE. THE VOLTAGE AND AMPERAGE RATINGS ARE MARKED ON ALL STRIKE LABELS. THE SOLENOID WIRES ARE NOT POLARIZED.

MONITORING (OPTIONAL)

MONITORED STRIKES CONTAIN TWO, INTERNALLY MOUNTED, SWITCHES: ONE IS ACTIVATED BY THE LATCH BOLT'S PENETRATION OF THE STRIKE AND THE OTHER INDICATES THE ENERGIZED LOCK/UNLOCKED STATUS OF THE SOLENOID.


ALL UNUSED LEADS FROM MONITOR SWITCHES SHOULD BE INSULATED.

- COMMON CONTACT - BLACK
- NORMALLY OPEN CONTACT (NO) - WHITE
- NORMALLY CLOSED CONTACT (NC) - RED
- MAXIMUM SWITCHING CURRENT - 5 AMPS @ 250 VAC


WARNING!

INTERMITTENT DUTY SOLENOIDS SHOULD NOT BE CONVERTED TO FAIL-SAFE CONFIGURATION. FAIL SAFE UNITS SHOULD ONLY BE OPERATED WITH DC POWER

SHIM PLATES ARE PRE-INSTALLED AT THE FACTORY. A THINNER SET OF SHIMS IS ALSO INCLUDED. IF NECESSARY, THE SHIMS CAN BE REMOVED ALTOGETHER TO CORRECT MISALIGNMENTS BETWEEN STRIKE AND LATCH.

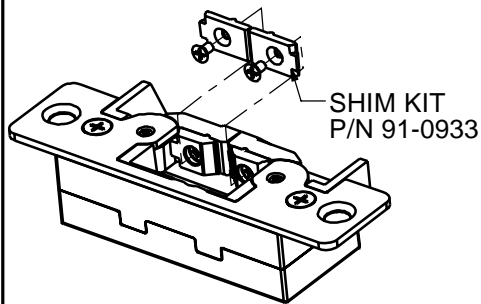


MONITORED VERSION ONLY

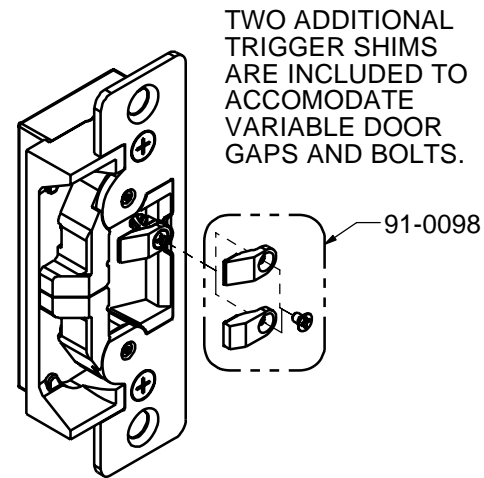

TWO ADDITIONAL TRIGGER SHIMS ARE INCLUDED TO ACCOMMODATE VARIABLE DOOR GAPS AND BOLTS.


Control Switch (N.O.)
(ex. Pushbutton, keypad, Card Reader)

DRY CONTACTS!

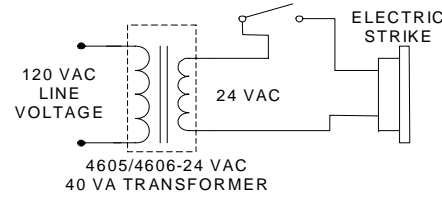

TYPICAL ELECTRIC STRIKE WIRING DIAGRAM INTERMITTENT DUTY FAIL-SECURE 24 VAC


Control Switch (N.O.)
(ex. Pushbutton, keypad, Card Reader) **DRY CONTACTS!**

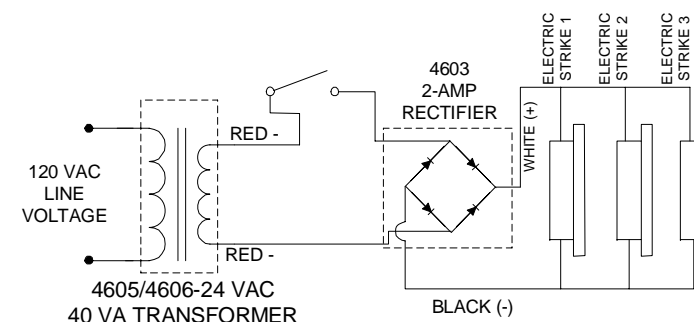


TYPICAL ELECTRIC STRIKE WIRING DIAGRAM INTERMITTENT/CONTINUOUS DUTY 24 VDC

FIELD REVERSIBLE (FAIL SECURE) TO FAIL SAFE

FAIL SECURE CONFIGURATION

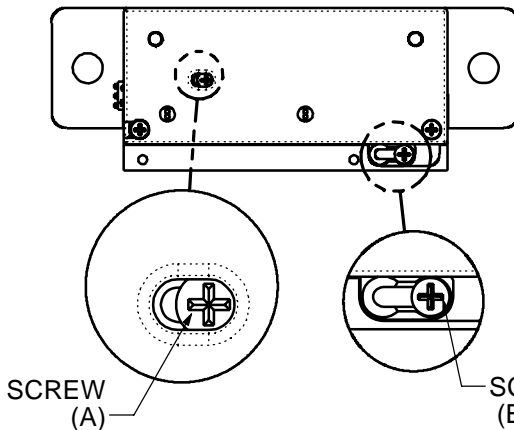

FAIL SAFE

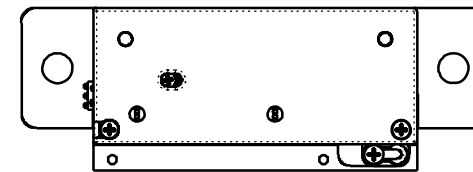


STEP 1 LOOSEN SCREW (A) APPROXIMATELY 2 ROTATIONS, SLIDE SCREW TO THE LEFT AND TIGHTEN.


STEP 2 LOOSEN SCREW (B) APPROXIMATELY 2 ROTATIONS, MOVE THE SLIDE TO THE RIGHT AND TIGHTEN. (DO NOT REMOVE SCREWS)

FIELD REVERSIBLE (FAIL SAFE) TO FAIL SECURE

FAIL SAFE CONFIGURATION

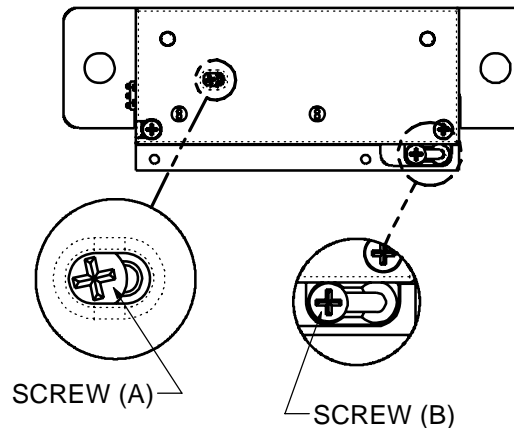

FAIL SECURE

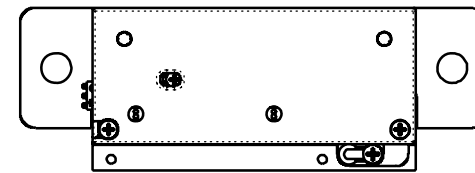


STEP 1 LOOSEN SCREW (B) APPROXIMATELY 2 ROTATIONS, AND MOVE THE SLIDE TO THE LEFT AND TIGHTEN (DO NOT REMOVE SCREWS).

STEP 2 LOOSEN SCREW (A) APPROXIMATELY 2 ROTATIONS AND SLIDE SCREW TO RIGHT AND TIGHTEN.

PRODUCT MUST BE INSTALLED ACCORDING TO ALL APPLICABLE BUILDING AND LIFE SAFETY CODES


WIRE CODING (MONITORED VERSION)

COLOR CODE:
Red : NC
White : NO
Black : Common

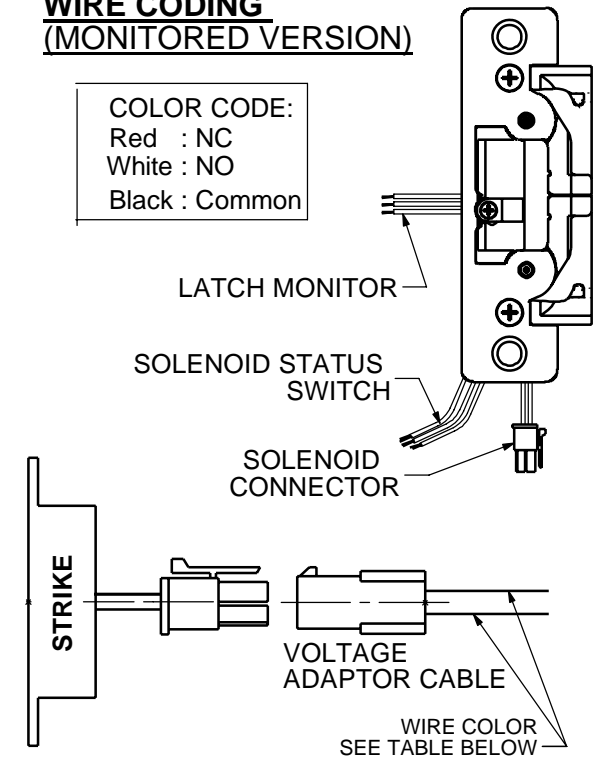

VOLTAGE ADAPTOR CABLE		
P/N#	WIRE COLOR	APPLICATION
VA7400-12	BLACK	12VAC/DC & 16VAC
VA7400-24	RED	24VAC/DC
VA7400-16VDC (OPTIONAL KIT)	WHITE	16VDC

SOLENOID WIRING DIAGRAM

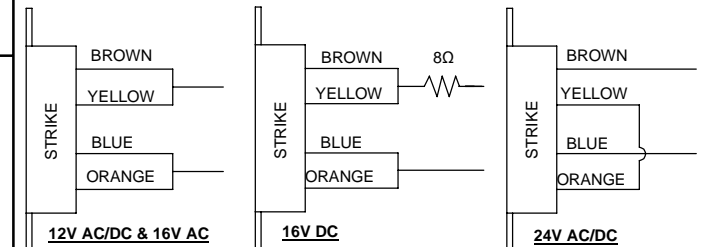

FOR WOOD DOOR APPLICATIONS

THE SPACER IS DESIGNED TO SIMPLIFY MORTISING ON WOOD DOOR APPLICATIONS

SPACER ASSY
OPTIONAL KIT
P/N WDC7400

