

### Overview:

Altronix PD8/PD8CB power distribution modules convert a single AC or DC input into eight (8) individually fused or PTC protected outputs.

### Specifications:

#### Input:

- 28VAC or 28VDC max., up to 10A.

#### Outputs:

- **PD8:** Eight (8) individually fused outputs (fuses are rated @ 3.5A; up to 5A fuses may be used).
- **PD8CB:** Eight (8) PTC protected auto-resettable outputs (PTCs are rated @ 2.5A).
- Surge suppression.

#### Main Fuse Ratins:

- Main fuse rated @ 5A/250V.

#### Visual Indicators:

- Power output LED indicator.

#### Additional Features:

- Power ON / OFF switch.

#### Board Dimensions (L x W x H, approximate):

5.25" x 3.25" x 1" (133.4mm x 82.6mm x 25.4mm).

### Installation Instructions:

1. Mount PD8/PD8CB in the desired location/enclosure (mounting hardware included).
2. Connect the desired power supply output to terminals marked [INPUT] (Fig. 1a).  
**Note:** If using DC voltage, left terminal is NEG. (-) and right terminal is POS. (+) (Fig. 1a).
3. Measure output voltage before connecting devices. This helps avoiding potential damage. All terminals with common suffix P "1P, 2P..." are the same polarity.
4. Set power switch [SW1] to the OFF position.
5. Connect each device to the terminal pairs 1 to 8, marked [1P - 1N] through [8P - 8N].
6. PD8 output fuses rated at 3.5A/250V (Replacement fuses can be rated at up to 5.0A).
7. Set power switch [SW1] to the ON position.

Fig. 1

PD8CB  
PTC protected  
Outputs

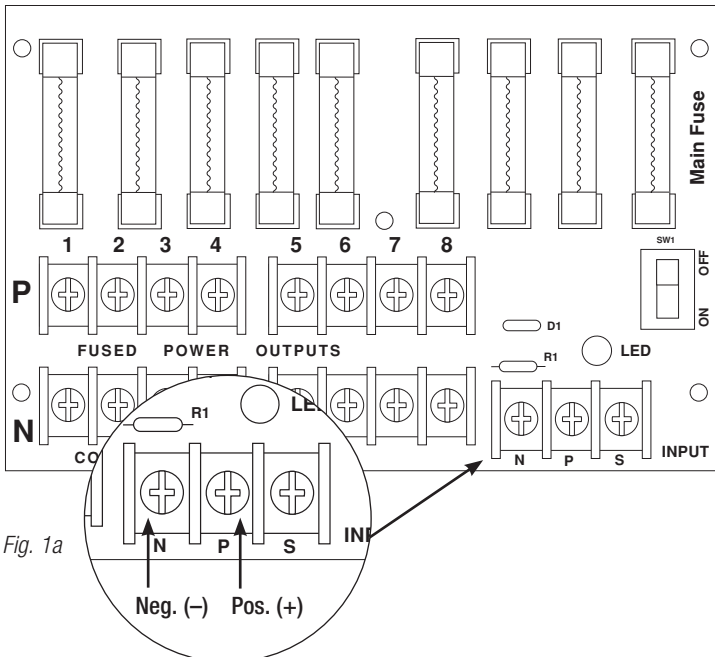


Fig. 1a

Altronix is not responsible for any typographical errors.

140 58th Street, Brooklyn, New York 11220 USA | phone: 718-567-8181 | fax: 718-567-9056

website: [www.altronix.com](http://www.altronix.com) | e-mail: [info@altronix.com](mailto:info@altronix.com) | Lifetime Warranty

IIPD8 - Rev. 111704