


INSTALLATION INSTRUCTIONS MODEL NTS-1



Backup Button

(Use if motion detection fails to operate switch)


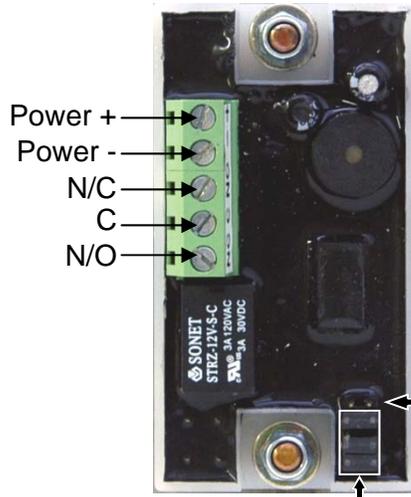


To ensure proper wire connection note that the silver contact of the terminal block is all the way down when loosened. Proper connection is made when tightening the screw on the terminal block such that the silver contact rises upward to clamp the wire in place.

LED Selection Jumper

Time Delay

Selection Jumpers

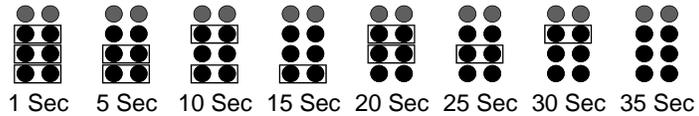

Specifications -

- Input Voltage: 12-24 Volts DC
- SPDT Contact Rating: 2A @ 30 Volts AC or DC
- Sensor Detection Range: Up to approximately 4 inches
- Operating Temperature: -25°C to +55°C
- Current Draw: 50mA @ 12VDC, 65mA @ 24VDC

Operation -

To operate the switch, make a slow waving motion with your hand within approximately 4 inches of the front of the plate. A tone will sound indicating that the relay has been activated. Switch relay will activate for the amount of time as set by the time delay jumpers.

The LED circle on the front of the plate can be set to either the color red (flashes green in 1 second intervals when relay is active) or green (flashes red in 1 second intervals when relay is active).

The Backup Button can be used if the motion detector fails to activate the relay.



Alarm Controls
19 Brandywine Drive
Deer Park, New York 11729
(800) 645-5538
www.alarmcontrols.com