

# Securiton EcoPower Power Supply

Efficient power supply for low-power locks

ASSA ABLOY



The global leader in  
door opening solutions



Reduce power supply standby power consumption to only 8.5mW, a 99% decrease compared to current linear and switching power supplies, with the Securiton EcoPower.

## Features & Benefits

- Included battery provides up to 24 hours of backup while built-in battery end-of-life notification system ensures uninterrupted service
- Low power draws allow for longer wire runs of thinner wire for lower cost of installation
- Covered by MagnaCare® lifetime replacement, no fault, no questions asked warranty

## Energy Efficient




- Achieve 99% energy savings with EcoPower compared to current switching power supplies
- Extremely low power consumption with only 8.5mW standby power consumption with a 115V input
- Microprocessor control eliminates power consuming relays

## Ease of Installation

- Multiple mounting options include surface mounted, recessed into drywall or installation on an existing UL listed double gang junction box
- Supports fail safe and fail secure lock configurations
- Aesthetic design allows for convenient installation near the lock



# Energy Efficient | Reliable | Flexible

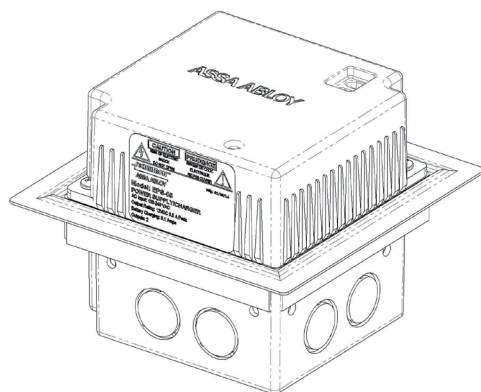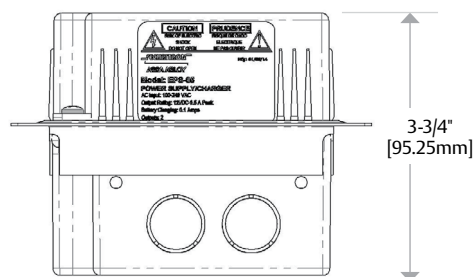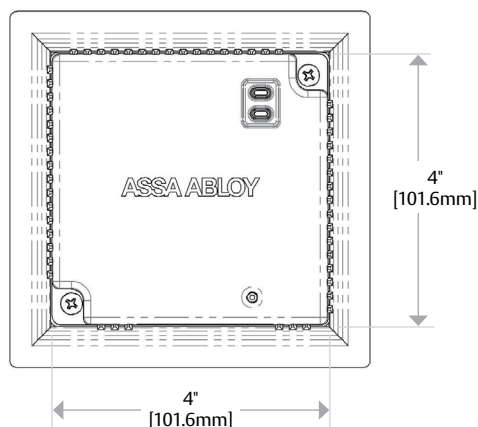

## Specifications

### Certifications

- UL 294 (6th Edition) listed
- UL 603 Listed
- ULC S533 Listed
- CE Certified
  - EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013
  - EN 55022: 2010
  - EN 55024: 2010
  - EN61000-3-2: 2014
  - EN61000-3-3: 2013
- RoHS Compliant
- REACH Compliant
- Environmental Product Declaration

### Electrical

- **Input voltage:** 100-240V
- **Output voltage:** 12V-14V
- **Standby power:** <10mW at 115V, <20mW at 230V
- **Output current:** 0.5A peak, 0.1A continuous
- Includes one (1) 800 mAh sealed AGM lead acid battery\*

### Operating Temperature

- -4° to 122°F [-20° to 50°C]

### Shipping Weight

- 1.7 lbs [0.77kg]

\*Battery not covered under MagnaCare® warranty.

## Features

### Standard Features

- Extremely low power consumption, only 8.5mW standby power consumption with a 115V input
- Included battery provides 24 hours of backup or more
- Universal input voltage capabilities (100-240 VAC)
- Multiple mounting options
  - Surface mounted
  - Recessed into drywall
  - Use either the factory box or an existing UL Listed double gang junction box
- Low power draws allow for longer wire runs of thinner wire for lower cost of installation
- Fire alarm input dry contact (NO or NC)
- Access control input dry contact (NO or NC)
- Supports fail secure and fail safe lock configurations
- LED troubleshooting
- Built in battery end-of-life notification system
- MagnaCare® lifetime replacement, no-fault, no questions asked warranty

## How to Order

Model Series	Output Power	Option(s)
EPS	- 05	B
EPS	05 0.5 Amps	(blank) PS, Enclosure, Battery
		B Circuit Board Only

ELECTRONIC SECURITY HARDWARE

HES | Securitron

assaabloyesh.com | 800.626.7590 | 10027 S. 51<sup>st</sup> Street, Ste. 102 Phoenix, AZ 85044 USA

DISTRIBUTED BY



ACCESS HARDWARE SUPPLY  
accesshardware.com

Patent pending and/or patent [www.assaabloydss.com/patents](http://www.assaabloydss.com/patents)  
Copyright © 2018, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited.