

II – 1100-7

INSTALLATION INSTRUCTIONS ACSI MODEL 1102 PIVOT


APPLICATION PROCEDURE

- FOR USE WITH 2 -WIRE CONCEALED ELECTRIC THROUGH-WIRE PIVOTS.
- STEEL PIVOTS FOR INTERIOR USE ONLY.
- BRASS, STAINLESS STEEL & ALUMINUM PIVOTS FOR INTERIOR AND EXTERIOR USE.

ELECTRICAL RATINGS

- EACH WIRE RATED 50 VOLTS AC/DC AT 3.5 AMPS (MAX.) CONTINUOUS, OR 16 AMPS (MAX.) PULSE.
- MAXIMUM PULSE WIDTH: 400 msec.
- MINIMUM "OFF" TIME BETWEEN PULSES: 10 SECONDS

WIRE GAUGE SIZE: 22 AWG (TYPICAL).

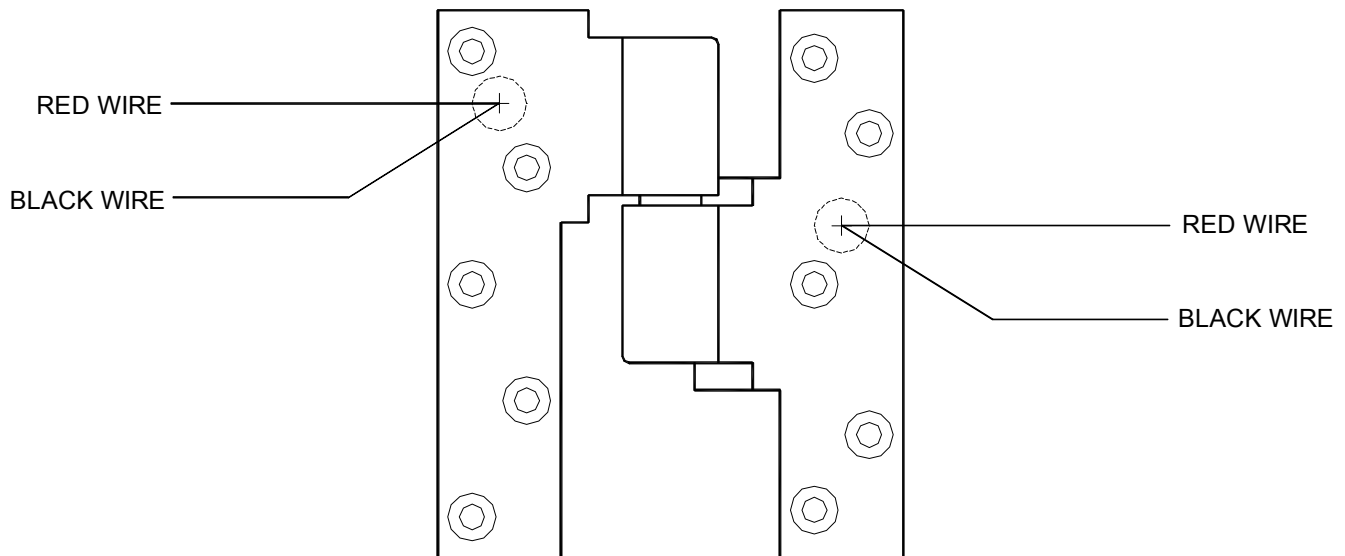

DOOR AND FRAME PREPARATION

- DOOR AND FRAME MUST BE PREPARED IN ACCORDANCE WITH THE APPROPRIATE “1102” PIVOT TEMPLATE.
- THROUGH WIRE TYPE PIVOTS ARE NON-LOAD BEARING AND MUST BE MOUNTED IN THE CENTER PIVOT POSITION ONLY.
- DO NOT ATTEMPT TO DISASSEMBLE PIVOT. PIVOT MUST BE INSTALLED ASSEMBLED. IF PIVOT IS DISASSEMBLED, MANUFACTURER’S WARRANTY WILL BE VOID.
- WIRE ACCESS HOLES MUST BE FREE OF BURRS AND SHARP CORNERS. CHECK TO MAKE SURE THAT PIVOT FITS FREELY IN PREP. TO AVOID DAMAGING AND OR SHORTENED LIFE, DO NOT FORCE PIVOT INTO PREP HOLES.
- HANG THE DOOR ON THE TOP AND BOTTOM PIVOTS FIRST (NOTE: THESE ARE NON-ELECTRICAL PIVOTS).

INSTALLATION

- ATTACH WIRES IN ACCORDANCE WITH PROJECT WIRING DIAGRAMS.
- OPEN DOOR TO 90° OR MORE FOR ACCESS TO JAMB PREPS.
- EXTRACT INTERIOR WIRING THROUGH THE PREP HOLES FROM THE DOOR AND JAMB.
- TERMINATE WIRE CONNECTIONS WITH APPROPRIATE CRIMP SPLICES OR WIRE NUTS.
NOTE: IT IS HELPFUL TO STAGGER TERMINATIONS. THIS ALLOWS FOR EASY INSERTION OF WIRES THROUGH PREP HOLES.
- **DO NOT HANG PIVOT BY WIRES DURING INSTALLATION OR SERIOUS DAMAGE COULD OCCUR.**
- AFTER ALL TERMINATIONS ARE COMPLETED, CAREFULLY SLIDE WIRES THROUGH PREP HOLE MAKING SURE THAT WIRES ARE PLACED SO THEY WILL NOT BE CUT OR PINCHED AS PIVOT IS INSTALLED.

