



9600 Genesis™



UL 1034
burglary listed




field selectable
(fail secure / fail safe)



field selectable
(12 or 24VDC)



grade 1

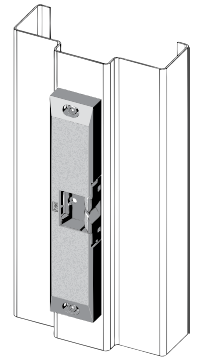

The original completely surface mounted solution

Completely surface mounted, the 9600 series Genesis is the first of its kind. The 9600 accommodates rim exit devices in metal or wood jambs. The 9600 features an internally mounted solenoid and two stainless steel, independently-operating locking mechanisms. The 9600 is easy to install, with all components encased in the 3/4" thick stainless steel housing, requiring no cuts to the jamb prior to installation.

Specifications

- UL1034 burglary-resistant rated
- ANSI/BHMA, A156.31 Grade 1 (#E09731, #E09732)
- Patented design

Frame application

- Steel
- Aluminum*
- Wood

Electrical


- .45 Amps @ 12VDC
- .25 Amps @ 24VDC

Standard Features

- Completely surface mounted
- Stainless steel construction
- Tamper resistant
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance 500,000 cycles
- Field selectable fail safe/fail secure
- Dual voltage 12 or 24 VDC
- Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- Accommodates up to 3/4" pullman latch
- Five year limited warranty

*Note: Will require additional mounting support



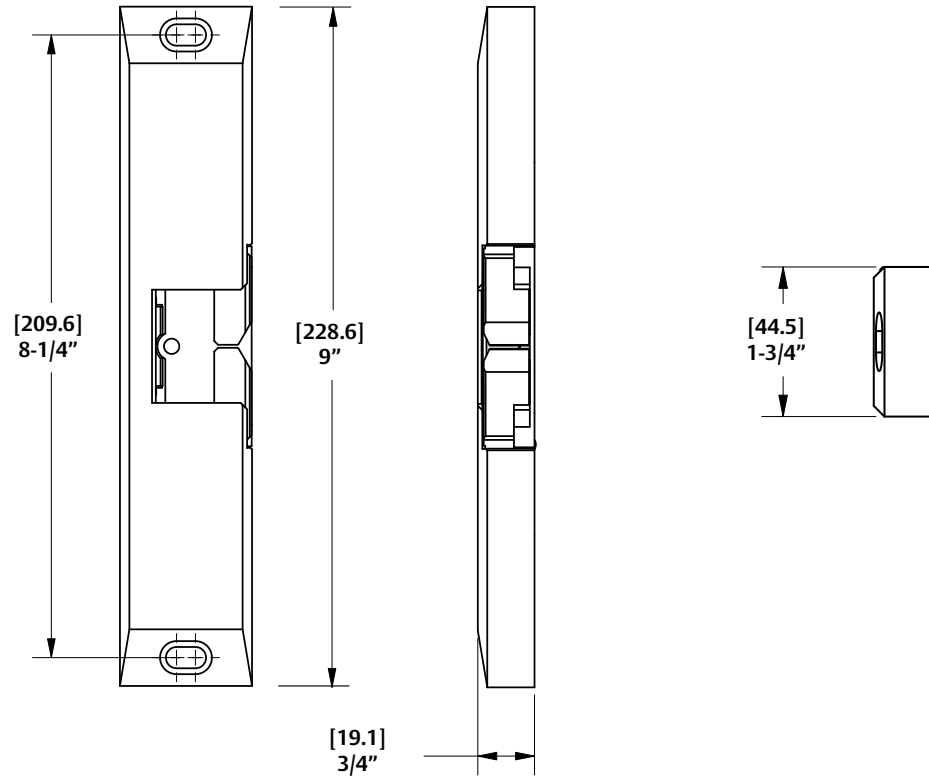

Optional Features

- LBM - Latchbolt monitor
- LBSM - Latchbolt strike monitor

Accessories

- 9500/9600 108 - Spacer plate (black finish only)
- 2001 - Plug-in bridge rectifier
- 2004 - ElectroLynx® adapter
- 2005 - SMART Pac II™
- 2006P - Plug-in buzzer
- 2009P - Plug-in LED

Finishes

- 630 - Satin stainless steel finish
- 605 - Bright brass finish
- 606 - Satin brass finish
- 612 - Satin bronze finish
- 613 - Bronze toned finish
- 629 - Bright stainless steel finish