



## ROFU<sup>®</sup> ELECTRIC STRIKE MODEL 2402

2402 - SERIES, WITH ANSI FACEPLATE 1¼" x 4<sup>7</sup>/<sub>8</sub>"

**MODEL 2402** — Fail - Safe / Fail - Secure

Electric strikes for use with mortise and cylindrical locksets.

For Commercial and Residential, New or Retrofit Uses



### Standard Features



**2402**  
Non-Handed

- Stainless Steel ANSI size Faceplate
- Frame Type - Hollow Metal, Aluminum or Wood
- Corrosion - Resistant case and moving parts.
- Tamper Strength Test - 1500 lbs (700 kg)
- Cycle Test 1,000,000 cycles
- Keeper Depth - **1/2"** Maximum Latch Projection possible with 1/8" Door/Frame Clearance - **5/8"**
- Strike Depth 1.25" Overall
- Reversible - Non Handed
- Stainless Steel Keeper
- Limited Warranty - **36 Months**
- **Easily converts from fail safe to fail secure and back.**

### Available in the following Voltages and Finishes:


Specify Finish           xUS32D  
Voltage, Fail Secure   x05=12VAC/12VDC  
                                  x08=24VAC/24VDC

### Optional Features:

- Monitor Switch — The strike contains a micro switch — to monitor that the latch is in the keeper opening. Specify LM
- 1" Lip Extension, specify #5525 or 2" Lip Extension, specify #5550.




**LINE ART FOR 2402**

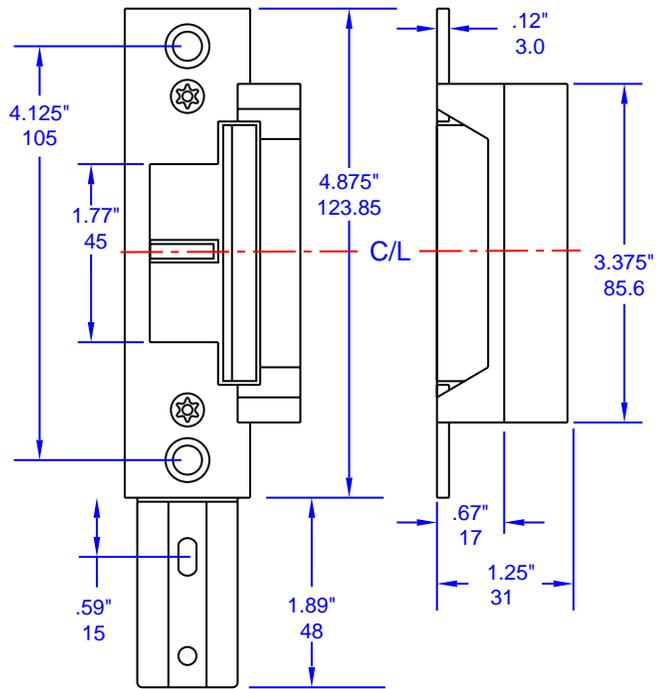



**HOLLOW METAL  
JAMB PREPARATION**

**SHOWN WITH OPTIONAL  
MONITORING SWITCH**

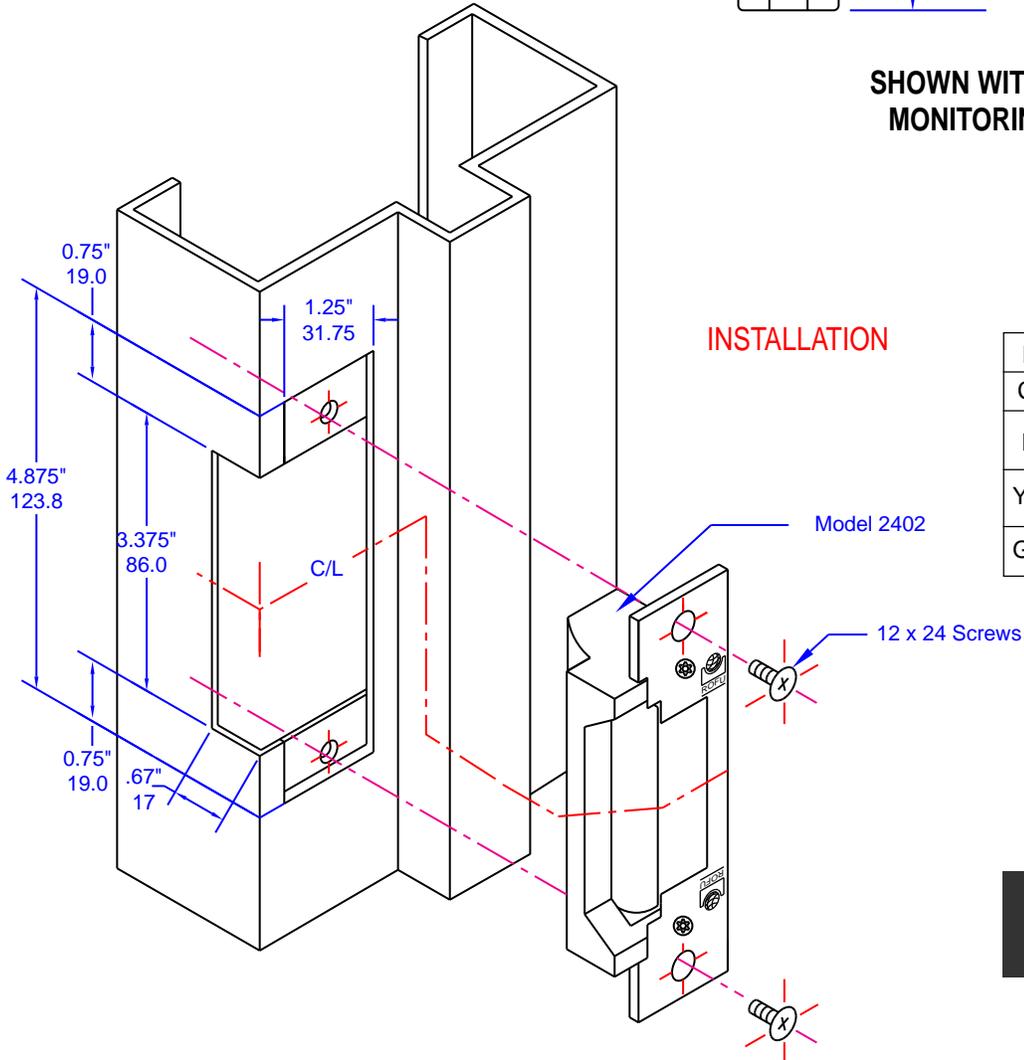

**INSTALLATION**

Monitor Switches (Optional)	
Color	xLM
Blue	Closed when tripper depressed
Yellow	Open when tripper depressed
Green	Common



**SHOWN IN FAIL  
SECURE MODE**