




**SECURITY DOOR CONTROLS**  
 3580 Willow Lane, Westlake Village, CA 91361-4921  
 (805) 494-0622 • Fax: (805) 494-8861  
 www.sdcsecurity.com • E-mail: service@sdsecurity.com


**REGULATED POWER SUPPLY  
 INSTALLATION INSTRUCTIONS**

**MODEL 634RF**

**FIGURE A**

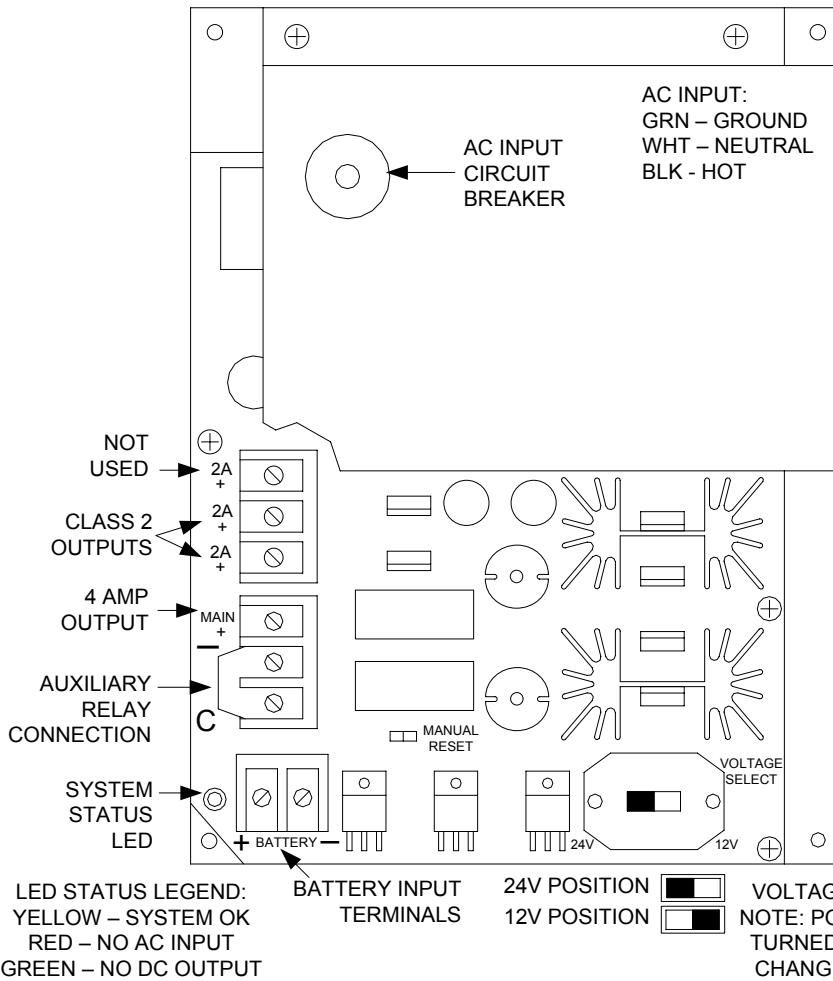


**COMPONENT LOCATIONS  
 FIGURE B**

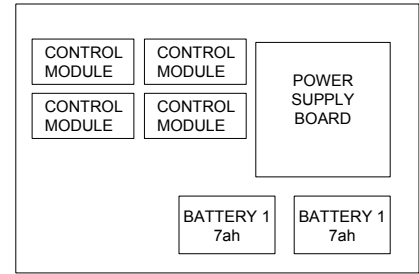

**STANDARD BOX**

**MAIN SYSTEM ON-OFF  
 FIGURE C**

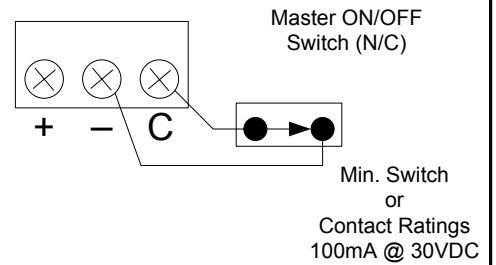

**POWER SUPPLY SPECIFICATIONS**


Input Voltage: 115 VAC @ 60hz  
 Input Current: 1.2 amps Max.

Output Voltage: 12/24VDC (Regulated)  
 Output Current: 4 amps  
 Ripple Voltage: 0.05 Volts Max.


Battery Charger Max. Current: 0.35 amps  
 Maximum recommended battery size: 7 ah  
 (Replace batteries every 3 years)

Suitable Uses:  
 Electric Lock Power Supply  
 Access Control Power Supply

12 Volt Mode  
 Battery Connections



24 Volt Mode  
 Battery Connections

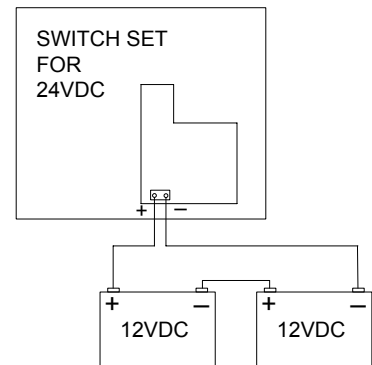

**TEST UNIT YEARLY**