

SECURITECH

YOU WANT, WE DO

Thank you for your interest in Securitech.

At Securitech, we are committed to providing you with the best products and world-class customer service to meet your forced-entry, vandal-resistance, operational and code-compliance needs. Our solution-driven products and innovative designs have proven themselves in the roughest locations.

Over twenty-five years of providing innovative solutions has created a wide-range of proven products and the foundation for new innovations. The binder is divided into two main solution sections: Electric Locking & Mechanical Locking.

To help you easily navigate within each section and efficiently locate the solution and products that you require, at the beginning of each product section you will find:

- Section Introductions, highlighting the products featured within that section.
- Function Charts, quickly allowing you to find the electronic and mechanical functions required.
- Popular Model Guides, helping you by showing what is commonly specified.
- Model Building Guides, a great source of information that we encourage you to read and use to build the exact lock that your specifications require.

At Securitech, we pride ourselves on our superior product quality and durability. We offer a unique range of solutions, designed to answer your most difficult and perplexing locking scenarios.

Behind our products stand our customer service and technical departments, ready to assure your 100% satisfaction. Building "Customized Locking Systems" is our specialty so please let us help you with those most challenging of systems. We have many more solutions, catalog cuts and customized product information. Please visit www.securitech.com (both the regular and "New Literature" sections) or contact us directly at 800-622-LOCK.

If there is anything that we can do for you, please do not hesitate to call us. We welcome the opportunity to work with you to fulfill all of your locking needs.

Mark Berger
President

toll free **800.622.LOCK**
local **718.392.9000**
fax **718.392.8944**

SECURITECH GROUP, INC.
54-60 46th St., Maspeth, NY 11378
www.securitech.com







TABLE OF CONTENTS



ELECTRIC LOCKING

Control Trim Solutions


Control Trim Options, Function Chart & Electrical Wiring Data	FUNCTIONS.....E1.0
Retrofit Control Trim For Panic Devices	LEXI.....E2.0
Mortise & Cylindrical Control Trim Packages	ELECTRA.....E3.0
Exit Device & Control Trim Packages	ACCED.....E4.0
Power Supplies, Electric Transfers & Wiring	POWER.....E5.0
Mantraps, Sally Ports, Interlocks, Secured Wards & Other Entry & Exit Control Systems	RACHIE.....E6.0
Advanced Request-To-Exit Trim	ARTE.....E7.0

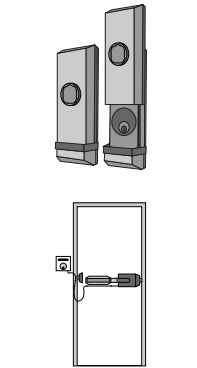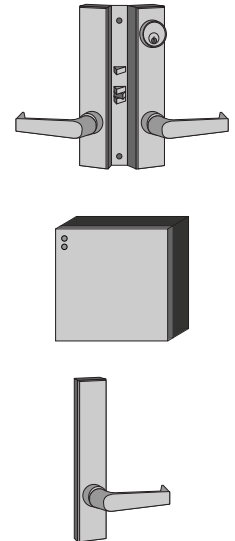

MECHANICAL LOCKING

Forced Entry Solutions

Cylinder Protection	Securiguard(6000).....M1.0
Multi-Point Secondary Locks (Surface Applied, Non Emergency)	MPPoliceLock(4800).....M2.0
2-Point Emergency Exit Locks	Serpent(SEL).....M3.0
Concealed Multi-Point Mortise Locks & Panic Devices	Multi-Bolt(7000).....M4.0
Automatic Dead Bolt Locking & Exit Devices	Auto-Bolt (8000).....M5.0



PRICING

Pricing & Policies

Price Book (if provided)	Pricing Index.....P1.0
--------------------------	------------------------



CONTROL TRIM

Electric Locking **Without** Electric Strikes, Electromagnetic Locks or Electrified Locks

GG TRIM

DESIGNED FOR ALL APPLICATIONS


Beauty, durability, and vandal resistance, the GG trim has it all. The attractive GG trim is available in most common plated finishes.



UG TRIM

VANDAL-RESISTANT

Designed to take a beating, the UG trim provides the highest level of security where aesthetics are not the primary concern. The UG trim is only available in a black powder coat finish.

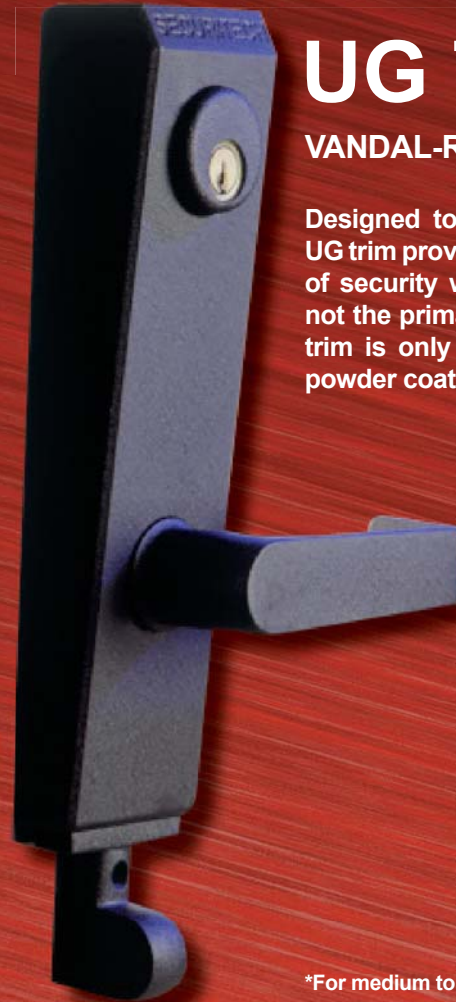

*For medium to wide stile doors

GG Exterior Trim Features

- Narrow design with many finish choices
- Works with mortise cylinders
- Cylinder held in place at two points
- Independent coil lever spring prevents lever from sagging
- LeverEx™ slip clutch lever handle (see page 2)
- Internal handle stop prevents rotation of lever beyond 70°
- ADA compliant lever handle
- Thru-bolted design

UG Exterior Trim Features

- Heavy duty
- Works with mortise cylinders
- Hardened Steel Cylinder protector resists drilling and prying
- Independent coil lever spring prevents lever from sagging
- LeverEx™ slip-clutch lever handle (see page 2)
- Exterior handle stop prevents rotation of lever beyond 85°
- ADA compliant lever handle
- Thru-bolted design

GG Interior Trim Features

- Attractive architectural design
- Built-in lever movement restrictor
- ADA compliant lever handle
- Optional request-to-exit available



UG Interior Trim Features

- Security head fasteners
- Patented "Quick-Switch" cylinder replacement
- Built-in lever movement restrictor
- ADA compliant lever handle
- Optional request-to-exit available





Slip-Clutch Lever

The GG & UG style exterior trims include Securitech's LeverEx™ slip-clutch apparatus inside each trim exterior lever handle. If the handle is forced while in locked mode, it breaks away without unlocking the door and the lock and lever are not damaged.

Resetting the lever is easy and does not require any tools or replacement parts. If the lever is forced downward, simply pick it back up. It will "lock" back into the correct position.

GG TRIM



Securitech's GG trim uses the LeverEx™ slip-clutch system.

The GG trim has an internal stop which prevents the lever from moving more than 70°.

UG TRIM



Securitech's UG trim uses the LeverEx™ slip-clutch system.


The handle stop at the bottom of the UG trim prevents the lever from rotating beyond 85°.

SMASH AWAY!

Use the UG trim for the toughest locations. The locked lever is designed to take a beating and not break. The UG trim can be used in place of the GG trim in most instances. To order a UG trim contact the factory.


*Recommended for medium to wide stile doors.

GG DIMENSIONS




When required, custom mounting plates are available for use with different manufacturers' exit devices. See the LEXI section on page E2.0.

GG & UG CYLINDERS



Cylinders are held in place at two points, not one point as in ordinary locks and trim. Used on both the UG and GG trims.

UG DIMENSIONS



QUICK-SWITCH CYLINDER

The inside and outside trim plates are not removed to exchange a cylinder. A special access hole, protected underneath the interior trim provides access to the cylinder locking bolt. When the bolt is loosened, the cylinder may be removed, replaced and re-installed. Other series might require removal of the interior trim to access the hole.

Trim Finishes	676	630	605	606	611	612
	Powder Coated Black	Satin Stainless Steel	Bright Brass	Satin Brass	Bright Bronze	Satin Bronze
	UG TRIM Only available in Powder Coated Black (676)	GG TRIM Comes standard in the Satin Stainless Steel (630) finish. Other options are shown here.	613	625	626	629
			Oil Rubbed Bronze	Bright Chrome	Satin Chrome	Bright Stainless

Lever Styles	0	ADA COMPLIANT	2	3	4
		UG Trim available in "0" lever style only GG Trim available in all lever styles			
	Standard With Return		Tapered	Tubular With Return	Tapered With Return

CONTROL TRIM SERIES

Electric Locking **Without** Electric Strikes, Electromagnetic Locks or Electrified Locks



LEXI™
ELECTRA™
ACCED™
ARTE™
RACHIE™

What is 1SOLUTION?



What is 1Solution? It is our electric locking and signalling via control trim solutions for both retrofit and new construction applications. Our control trim solutions can be used in thousands of applications from schools, universities and apartment buildings to hospitals, government facilities and office buildings. Our GG style control trim is used with all of our electric locking solutions to give you a uniform look and common method of entry throughout your facility.

It is our control trim that can be integrated with most access control or remote release systems, and can be installed on virtually any door.*

It is our 24vDC electric release solenoid inside the trim, eliminating the need for electric strikes. This allows for easier installation and greater reliability and durability.

Our control trim uses internal switches, activated by lever movement that can send request-to-exit signals and release electromagnetic locks.

*Not applicable on all glass doors.

Solutions

LEXI™	Control trim can be retrofitted to essentially any existing exit device hardware. Use this to electrify all of your doors without replacing hardware. The LEXI™ series uses specially designed mounting plates and operators to retrofit to various exit devices. See page E2.0 for more information.
ELECTRA™	Control trim packages for mortise or cylindrical openings. Use these in both retrofit of new construction applications. All the hardware is included. See page E3.0 for more information.
ACCED™	Control trim packages with panic exit device. Use this for new construction applications requiring exit devices and control trim. All hardware is included. See page E4.0 for more information.
ARTE™	Control trim for doors that only need a signal. Eliminates the need for pushbutton, IR sensors and other magnetic releases. Provides a request-to-exit or electromagnetic lock without the use of a keyed or electric release trim. See page E7.0 for more information.
RACHIE™	Double sided control trim for mantraps, sally ports, interlocks, secured wards and other entry & exit control systems. The RACHIE™ provides 24vDC electric release to both sides of the door. Customized for psychiatric hospitals, detention facilities, laboratories, financial institutions, government facilities and retail stores to name a few. See page E6.0 for more information.

CONTROL TRIM

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

1SOLUTION for all of the following types of applications:

Retrofit Model - Exterior Electric Release Trim For Use With Existing Exit Devices

LEXI™

EDT Models	<p>For Doors With Existing Exit Devices</p> <p>Match existing exit device with our mounting plate and operator.</p>				
		Sample Rim Operator	Sample Mortise Operator	Sample Lifting Operator	Sample Mounting Plates

See the LEXI Mounting Plate and Operator Finder on page E2.3 for complete listings.

Complete Packages - Including Lockset

ELECTRA™ Mortise

ML Series	<p>For Doors With Mortise Openings</p> <p>Choose from 4 lock bodies depending on door type</p>	MLA "A" Series 2-3/4" back set 1-1/4"x8" faceplate 4-1/4" depth	MLS "S" Series 2-3/4" back set 1-1/4"x8" faceplate 4-1/4" depth	MLM Mini-Mortise 2" back set 1-1/4"x6-7/8" faceplate 2-7/8" depth	MLN Narrow-Stile 1-1/4" back set 1"x6-7/8" faceplate 1-5/8" depth
		Standard hollow metal or wood doors	Medium-stile	Narrow-stile	

ELECTRA may also be ordered less lock body to operate with other manufacturers' mortise locks

ELECTRA™ Cylindrical

CL Series	<p>For Doors With Cylindrical Openings (new or retrofit)</p> <p>Choose mounting plate</p>	CLS Standard Mounting Plate 2-3/4" back set 2-1/4"x9-1/2" under plate New Construction	Fits standard 2-1/8"x1" cross bore door prep	CLW Wide Mounting Plate 2-3/4" back set 3-1/2"x9-1/2" under plate Retrofit	Wide mounting plate covers existing wide roses
------------------	--	--	--	--	--

ACCED™

ED Series	<p>For Doors Requiring Exit Devices and Control Trim</p> <p>Select the type of exit device.</p>					
		Rim	Surface Vertical Rod	Concealed Vertical Rod	Mortise	Rim Bolt

RACHIE™

RA Series	<p>For Mantraps, Sally ports & Other Custom Applications</p> <p>Provides Control Trim On Both Sides Of The Door</p>	RA-M100 Electrically & key released trim, mortise locks and electromagnetic locks. Key override restricted. Electromagnetic	RA-E100 Electrically & key released trim, mortise locks. Key overrides at all times, violations are possible. Electric Trim Only	TRIM IDENTIFICATION CHART
------------------	--	--	---	--------------------------------------

ARTE™

ST Series	<p>For Doors Which Only Need A Signal Trim</p> <p>Provides a R-T-E (Request-To-Exit) or Electromagnetic Lock control without use of keyed or electric release trim. "No Special Knowledge" required.</p>	STL Lever Only (No Lock Control) Switch Only Series: No Cylinder Or Electric Release	STA With "A" Series Mortise Lock	STC With Cylindrical Lock set Replaces P-I-R or R-T-E Buttons
------------------	---	---	--	--








TABLE OF CONTENTS

ELECTRIC LOCKING

Control Trim Solutions

Control Trim Options, Function Chart & Electrical Wiring Data	FUNCTIONS.....E1.0
Retrofit Control Trim For Panic Devices	LEXI.....E2.0
Mortise & Cylindrical Control Trim Packages	ELECTRA.....E3.0
Exit Device & Control Trim Packages	ACCED.....E4.0
Power Supplies, Electric Transfers & Wiring	POWER.....E5.0
Mantraps, Sally Ports, Interlocks, Secured Wards & Other Entry & Exit Control Systems	RACHIE.....E6.0
Advanced Request-To-Exit Trim	ARTE.....E7.0




toll free **800.622.LOCK**
 local **718.392.9000**
 fax **718.392.8944**

SECURITECH GROUP, INC.
 54-60 46th St., Maspeth, NY 11378
 www.securitech.com

CONTROL TRIM OPTION OVERVIEW

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

Securitech Control Trim meets today's system integration needs.

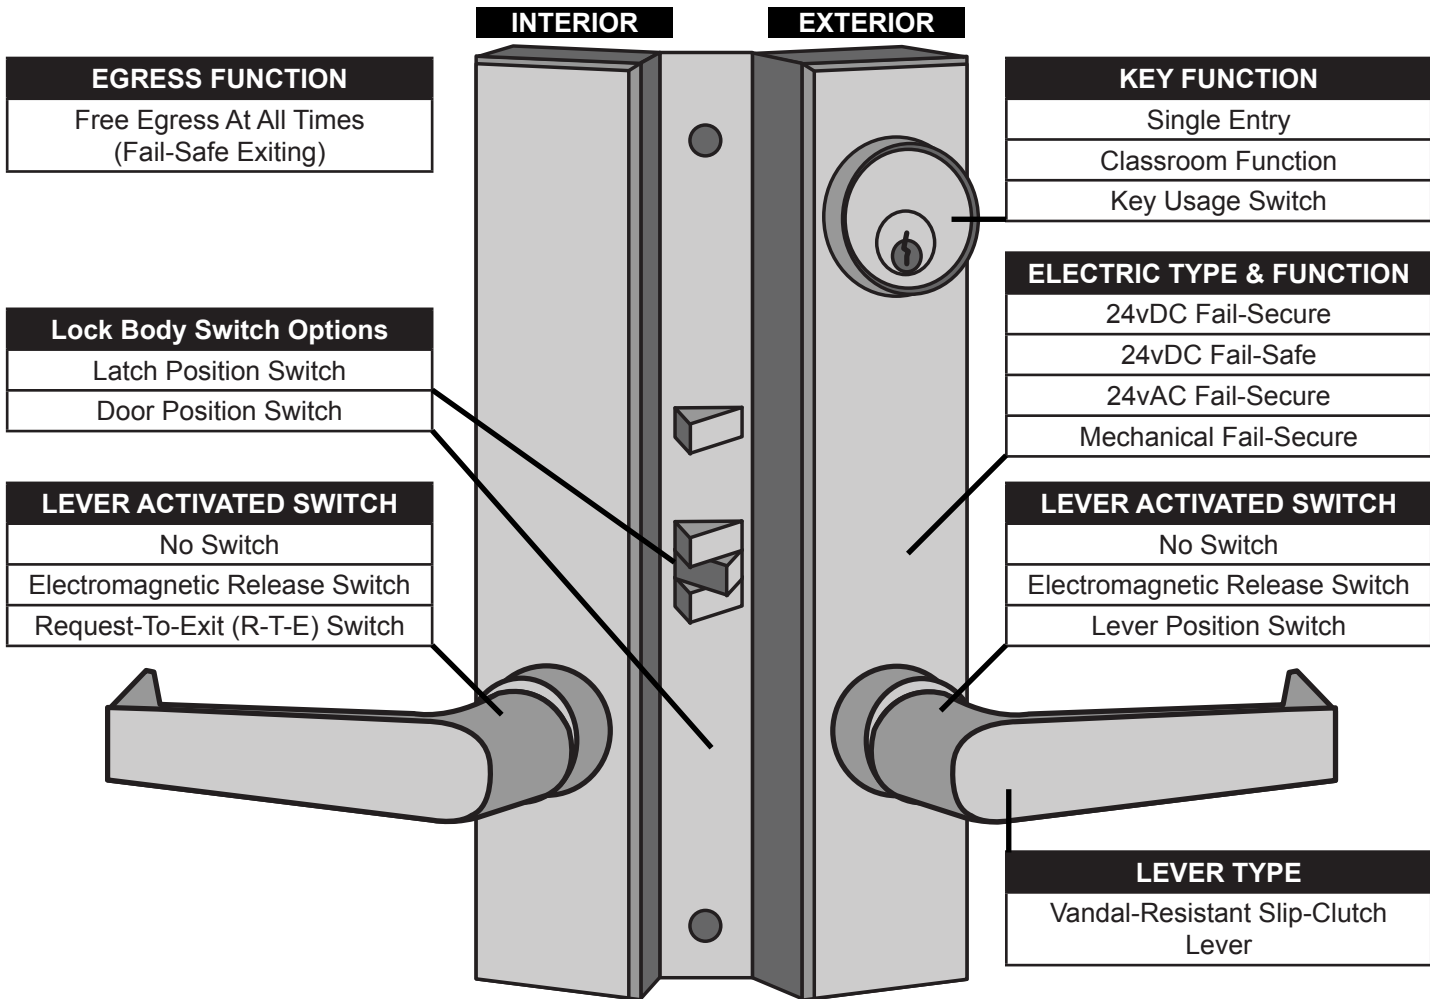

Exterior Operation Options

Key Function	Single Use - Store Room: Lever relocks when key is removed. (Standard)	Electric Release	Fail-Secure Lever remains locked with loss of power. (DC Release, AC Release, Mechanical)	Power Options	24vDC Used for Fail-Secure or Fail-Safe.
	Classroom: Lever remains unlocked until relocked by key.		Fail-Safe For re-entry applications; lever unlocks with loss of power. (Re-Entry)		24vAC(30VA) Used when "Buzzing" sound is required. Fail-Secure only.
					Mechanical Only Use Storeroom or Classroom Function

Signaling Options

Interior	Request-To-Exit Moving lever sends signal for exiting; Eliminates need for R-E-X or P-I-R switches	Exterior	Key Usage Switch Indicates key is used to bypass access control systems	Lock Body	Latch Position Switch Indicates that latch is fully extended
					Door Position Switch Indicates that the door is in the frame

FUNCTION CHART

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

Use this Function Chart in reference to LEXI, ELECTRA and ACCED electric lock models.

FUNCTIONS DESCRIPTIONS	DC Release							
	D11	D13	D14	D15	D16	D17	D31	D37
Fail-Secure	🔒	🔒	🔒	🔒	🔒	🔒	🔒	🔒
Fail-Safe	🔓	🔓	🔓	🔓	🔓	🔓	🔓	🔓
Entry By Key	🔑	🔑	🔑	🔑	🔑	🔑	🔑	🔑
24vDC Electric Release	24D	24D	24D	24D	24D	24D	24D	24D
24vDC Re-Entry Function								
24vAC "Buzzing" Release								
Key Usage Switch		🔑	🔑					
Latch Position Switch			🔑					
Request-To-Exit Signal								
Classroom Function							CF	CF
Key On/Off Switch				ON/OFF	ON/OFF			
Single Entry	🔑	🔑	🔑	🔑	🔑	🔑	🔑	🔑

FUNCTIONS DESCRIPTIONS	Re-Entry						
	R11	R13	R17	R21	R23	R24	R27
Fail-Secure	🔒	🔒	🔒	🔒	🔒	🔒	🔒
Fail-Safe	🔓	🔓	🔓	🔓	🔓	🔓	🔓
Entry By Key	🔑	🔑	🔑	🔑	🔑	🔑	🔑
24vDC Electric Release	24D	24D	24D	24D	24D	24D	24D
24vDC Re-Entry Function	24R	24R	24R	24R	24R	24R	24R
24vAC "Buzzing" Release	24A						
Key Usage Switch		🔑	🔑				
Latch Position Switch			🔑				
Request-To-Exit Signal							
Classroom Function							
Key On/Off Switch							
Single Entry	🔑	🔑	🔑	🔑	🔑	🔑	🔑

FUNCTIONS DESCRIPTIONS	DC Release With Request-To-Exit							
	D21	D23	D24	D25	D26	D27	D41	D47
Fail-Secure	🔒	🔒	🔒	🔒	🔒	🔒	🔒	🔒
Fail-Safe	🔓	🔓	🔓	🔓	🔓	🔓	🔓	🔓
Entry By Key	🔑	🔑	🔑	🔑	🔑	🔑	🔑	🔑
24vDC Electric Release	24D	24D	24D	24D	24D	24D	24D	24D
24vDC Re-Entry Function								
24vAC "Buzzing" Release								
Key Usage Switch		🔑	🔑					
Latch Position Switch			🔑					
Request-To-Exit Signal								
Classroom Function							CF	CF
Key On/Off Switch				ON/OFF	ON/OFF			
Single Entry	🔑	🔑	🔑	🔑	🔑	🔑	🔑	🔑


FUNCTIONS DESCRIPTIONS	AC "Buzz"	
	A11	A21
Fail-Secure	🔒	🔒
Fail-Safe	🔓	🔓
Entry By Key	🔑	🔑
24vDC Electric Release	24D	24D
24vDC Re-Entry Function	24R	24R
24vAC "Buzzing" Release	24A	24A
Key Usage Switch		
Latch Position Switch		
Request-To-Exit Signal		
Classroom Function		
Key On/Off Switch		
Single Entry	🔑	🔑

How to determine the swing of the door

Door Handing

The door handing is determined by looking at the door from the exterior (key) side of the door.


Look at the hinges and determine if the door swings in to the room or out of the room.

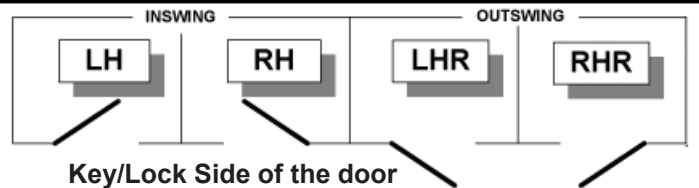

ELECTRICAL WIRING DATA

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

EXAMPLE:

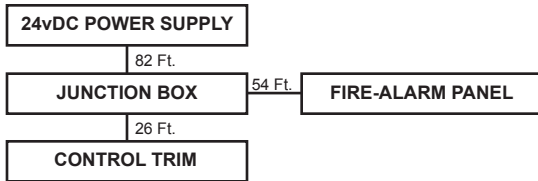

In the example above, 4 items are being connected: a 24vDC power supply; a junction box; a fire-alarm panel, for emergency release of the door in case of fire; and a control trim.

First, determine the distance between each of the items:

The 24vDC power supply is connected to the junction box. The distance is 82 feet.

The junction box is connected to the fire-alarm panel and the control trim. The distance between the junction box and fire-alarm is 54 feet. The distance between the junction box and the control trim is 26 feet.

Next add the distances (82, 54, 26) together. The total distance is 162 feet.

Refer to the chart for 24vDC. Locate the nearest distance (250 feet). The recommended wire size is 18 AWG.

NOTE: For more wiring information, please contact Securitech for assistance

These recommended, minimum wire sizes are for reference only. Verify compliance with the local codes before installation.

The charts are base of the following criteria:

Current

The amount of current from the power supply to the control switches, contacts and the electrical product.

Distance

The distance, in feet, that the current travels from the power supply to the control switches, contacts and the electrical product.

Wire Size

Minimum size required for controlling the electrical product. Larger sizes can be used to meet code.

Wire Length

Length of wire in one direction.

Solenoid

Providing sufficient voltage to the solenoid of one product. If more products are used, the distance should be multiplied by the number of products used. Our electric release solenoid has a low current draw allowing easy access control system integration without requiring special power supplies.

DISTANCE (in feet)

VOLTAGE	25	50	100	150	250	500	750	1000
24vAC (30VA)	18 AWG	18 AWG	18 AWG	18 AWG	16 AWG	14 AWG	12 AWG	10 AWG
24vDC	18 AWG	18 AWG	18 AWG	18 AWG	18 AWG	18 AWG	16 AWG	14 AWG

TRANSFORMER

Solenoid	Resistance	Draw
AC	5 OHMS	2 AMPS
DC	90 OHMS	.003 AMPS

LEXI™

Retrofit Control Trim For Exit Devices

The Universal Access Control Solution For Electrifying Exit Devices



Easy Installation To Existing Doors

Does not require cutting into frame for electric strike.

Easy "No Special Knowledge" Operation

Unlock the lever by key, card access, keypad, intercom, push-button or other release.

Slip Clutch Lever Handle

Stands up to abuse; will break-away when forced; easily reset by just lifting up.

Stainless Steel Lever

Durable, rugged one-piece construction. Meets ADA Code.

Dual Point Cylinder Holder

The cylinder is fastened to the trim with locking arms extending into a groove on each side of the cylinder.

Use the LEXI™ across a campus, school system or other institutional facility with many different exit devices. Retrofits to all major manufacturer's exit devices!



MOUNTING PLATE & OPERATOR

Give your doors a uniform look without changing all the hardware.

Retrofitting our LEXI™ Control Trim to various exit devices is made possible by Securitech's Mounting Plates & Operators (MP&O). Each MP&O is created specifically with a certain exit device in mind. We are always creating new MP&O's if you find that we do not have a MP&O for your device, please contact Securitech.


The MP&O is mounted to the back of the LEXI™ Control Trim. This is bolted through the door to the exit device allowing the trim and device to work simultaneously.

Mounting Plates



See MP&O Finder on page E2.3-E2.5 for complete listing.

Operators



See MP&O Finder on page E2.3-E2.5 for complete listing.

LEXI™ Model Builder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

1	SERIES	EDT	Exit Device Trim	<input type="text"/>
		EMT	Exit Device Trim, With Maglock Control	
2	TRIM	G2	GG Style Trim; Durable, Slip Clutch Model (vandal-resistant)	<input type="text"/>
		LEVER	0 Standard With Return (Standard) 2 Tapered 3 Tubular With Return 4 Tapered With Return	
3	FUNCTION	D11	24vDC Release, Single Entry, Fail-Secure	<input type="text"/>
		D13	24vDC Release, Key Usage Switch	
		D15	24vDC Release, Key On/Off Switch	
		D31	24vDC Release, Classroom Function	
		R11	Re-Entry Function, 24vDC Required, Fail-Safe	
		R13	Re-Entry Function, Key Usage Switch	
		A11	24vAC (30VA) Release, Single Entry, Fail-Secure	
		A13	24vAC (30VA) Release, Key Usage Switch	
		M10	Mechanical, Single Entry	
		M30	Mechanical, Classroom Function	
M00	Mechanical, Dummy Trim			
All Functions Listed		<input type="text"/>		
4	POPULAR MOUNTING PLATES & OPERATOR (MP&O)	D4G2	2" x 9.213" Doromatic, CVR-1690, 990	<input type="text"/>
		D6G2	2" x 9.210" Doromatic, CVR-3700	
		J2F1	1.676" x 9.776" Jackson, CVR-885, 1085, 1285, 2085	
		K1E1B	2" x 13.625" Kawneer, CVR-Paneline(wide plate)	
		V1A1	2.5" x 10.5" Von Duprin, Rim-99EO, 99NL(cyl), 99TP, 99K, 9927EO NL(cyl), 9927L, 9927K, 9947EO, 9947NL(cyl), 9947L	
		Y1A1	2" x 9.25" Yale, SVR7110, SQB7150(n), CVR7140(n), Rim7200(w), CVR7240, Corbin Russwin, Rim-ED5200(n), SVR-ED5400(n), CVR-ED5800(n), Rim-ED4200, SVR-ED4400, SVR-ED4800, Rim-ED6200, SVR-ED6400(EO), CVR-ED6800(EO)	
Y3A1	3" x 10.5" Yale, Rim7100(w), SQB7150(w), SVR7110(w), CVR7140(w)			
For more options see LEXI MP&O Finder (page E2.3-E2.5)		<input type="text"/>		
5	SPECIAL OPTIONS	SPECIAL OPTIONS (List As Needed)		
		F1	Lever Position Switch	<input type="text"/>
		F3	Thick Door (2-2 1/2)	
		F4	LED Lever Release Indicator	
		F5	Security Fasteners	
		F6	Piezo Sounder For Lever	
6	FINISH	630	Satin Stainless Steel	
		605	Bright Brass	
		606	Satin Brass	
		613	Oil Rubbed Bronze	
		625	Bright Chrome	
		626	Satin Chrome	
7	DOOR HANDING	LHR	Left Hand Reverse Door	<input type="text"/>
		RHR	Right Hand Reverse Door	

ENTER MODEL CODE


EXAMPLE: EDT-G20-D13-Y1A-F1-630-LHR

1 2 3 4 5* 6 7

*Field #5 (Special Functions) is optional.

	D11	D13	D15	D31	R11	R13	A11	D37
Fail-Secure	🔒	🔒	🔒	🔒	🔒	🔒	🔒	🔒
Fail-Safe	🔓	🔓	🔓	🔓	🔓	🔓	🔓	🔓
Entry By Key	🔑	🔑	🔑	🔑	🔑	🔑	🔑	🔑
24vDC Electric Release	24D	24D	24D	24D	24D	24D	24D	24D
24vDC Re-Entry Function					24R	24R		
24vAC "Buzzing" Release							24A	24A
Key Usage Switch		🔑				🔑		🔑
Latch Position Switch	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Request-To-Exit Signal	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a
Classroom Function				CF				
Key On/Off Switch					ON/OFF			
Single Entry	🔑	🔑	🔑	🔑	🔑	🔑	🔑	🔑

FAIL-SECURE LOCKING



Fail-Secure locking is available in Single-Entry Storeroom Function or Classroom Function. Fail-Secure models stay locked at all times, unless unlocked by key. In the event of an emergency the locks remained secured.

FAIL-SAFE (STAIRWELL) RE-ENTRY LOCKING



Re-Entry (stairwell) locking fills the need where a door needs to be secured during normal operation, but is also a means of escape or refuge in the event of an emergency. Many building codes mandate re-entry every fourth floor in a high-rise building. Build a Fail-Safe, Stairwell, Re-Entry Model using the "R" Functions.

Example: EDT-G20-R11-Y1A1-630-LHR

Abbreviations - CVR = concealed vertical rod, SVR = surface vertical rod, N = narrow, W = wide, EO = exit only


LEXI™ Popular Models

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

Retrofit control trim for existing exit devices.

Use for:

- Schools Systems*
- Universities*
- Apartment Buildings*
- Hospitals*
- Government Facilities*
- Office Buildings*



FEATURED MP&O

UNIVERSAL MOUNTING PLATE (U1A)

Add a U1A to any exit device where 75° or less rotation of rim tail piece will operate (nightlatch)

EDT-G20-D11-J2F1-630-(RHR or LHR)

Electric release trim for Jackson concealed vertical rod exit devices. Compatible with Jackson CVR-885, 1085, 1285, 2085
Popular finishes; satin stainless steel (630) or oil rubbed bronze (613)
Function; 24vDC release, single entry, fail-secure

EDT-G20-D13-J2F1-630-(RHR or LHR)

Electric release trim for Jackson concealed vertical rod exit devices. Compatible with Jackson CVR-885, 1085, 1285, 2085
Popular finishes; satin stainless steel (630) or oil rubbed bronze (613)
Function; 24vDC release, single entry, fail-secure, key usage switch

EDT-G20-D11-D4G2-630-(RHR or LHR)

Electric release trim for Doromatic concealed vertical rod exit devices. Compatible with Doromatic CVR-1690, 990
Popular finishes; satin stainless steel (630) or oil rubbed bronze (613)
Function; 24vDC release, single entry, fail-secure

EDT-G20-D13-D4G2-630-(RHR or LHR)

Electric release trim for Doromatic concealed vertical rod exit devices. Compatible with Doromatic CVR-1690, 990
Popular finishes; satin stainless steel (630) or oil rubbed bronze (613)
Function; 24vDC release, single entry, fail-secure, key usage switch

EDT-G20-D11-V1A1-630-(RHR or LHR)

Electric release trim for Von Duprin rim exit devices. Compatible with Von Duprin Rim-99EO, 99NL(cyl), 99TP, 99K, 9927EO, 9927NL(cyl), 9927L, 9927K, 9947EO, 9947NL(cyl), 9947L
Function; 24vDC release, single entry, fail-secure

EDT-G20-D13-V1A1-630-(RHR or LHR)

Electric release trim for Von Duprin rim exit devices. Compatible with Von Duprin Rim-99EO, 99NL(cyl), 99TP, 99K, 9927EO, 9927NL(cyl), 9927L, 9927K, 9947EO, 9947NL(cyl), 9947L
Function; 24vDC release, single entry, fail-secure, key usage switch


EDT-G20-D11-Y1A1-630-(RHR or LHR)

Electric release trim for Yale exit devices. Compatible with Yale VR7110, SQB-7150(n), CVR-7140(n), Rim-7200(w), CVR-7240, Rim-ED5200(n), SVR-ED5400(n), CVR-ED5800(n), Rim-ED4200, SVR-ED4400, SVR-ED4800, Rim-ED6200, SVR-ED6400(EO), CVR-ED6800(EO)
Function; 24vDC release, single entry, fail-secure

EDT-G20-D13-Y1A1-630-(RHR or LHR)

Electric release trim for Yale exit devices. Compatible with Yale VR7110, SQB-7150(n), CVR-7140(n), Rim-7200(w), CVR-7240, Rim-ED5200(n), SVR-ED5400(n), CVR-ED5800(n), Rim-ED4200, SVR-ED4400, SVR-ED4800, Rim-ED6200, SVR-ED6400(EO), CVR-ED6800(EO)
Function; 24vDC release, single entry, fail-secure, key usage switch

FAIL-SAFE (STAIRWELL) RE-ENTRY MODELS



For popular Re-Entry Models replace "D" Function with "R" Function.

- R11 Re-Entry DC, Single Entry, Fail-Safe
- R13 Re-Entry DC, Single Entry, Fail-Safe, Key Usage Switch

Re-Entry (stairwell) locking fills the need where a door needs to be secured during normal operation, but is also a means of escape or refuge in the event of an emergency. Many building codes mandate re-entry every fourth floor in a high-rise building. Build a Fail-Safe, Stairwell, Re-Entry Model using the "R" Functions.

Example: EDT-G20-R11-Y1A1-630-LHR

All LEXI models are Fail-Secure unless a Re-Entry function (e.g. R11) is selected.

LEXI™ MP&O Finder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

FIND YOUR EXIT DEVICE MODEL NUMBER. FIND THE CORRESPONDING MP&O. PLACE THE MP&O DESIGNATION INTO FIELD #4 ON THE LEXI MODEL BUILDER PAGE.

Von Duprin Exit Devices

MODEL	TYPE	DEVICE	EXTERIOR	OPERATOR	MP&O	LEVEL
22	RIM	22NL	N/A	N/A	U1A1	II
33	RIM	33EO	Contact Securitech For More Information On 33 Series Surface and Rim Devices			
33	RIM	33NL-OP				
33	RIM	33L				
3327	SVR	3327L				
3347	CVR	3347L				
3347	CVR	3347TL	LEVER TRIM	372L	V9D6	IV
3347	CVR	3347TL	THUMBTURN	376T	V13D6*	IV
33A	RIM	33AEO	NONE	N/A	V10A4	II
33A	RIM	33ANL	CYLINDER	386NL	V10A4	II
33A	RIM	33AL	LEVER TRIM	360L	V10A4	II
33A47	CVR	33A47EO	NONE	N/A	V10A4	II
33A47	CVR	33A47NL	CYLINDER	386NL	V10A4	II
33A47	CVR	33A47L	LEVER TRIM	360L	V10A4	II
33A47	CVR	33A47TL	THUMBTURN	376T	V13D6*	IV
5547	CVR	5547TL	THUMBTURN	376T	V13D6*	IV
55	RIM	55NL	LEVER TRIM	5575NL	V18A1	IV
88	RIM	88NL	CYLINDER	880NL	V2A1	II
88	RIM	88TP	THUMB PIECE	880TP	V15A1**	IV
88	RIM	88L	LEVER TRIM	373L	V20B4	II
88	RIM	88K	KNOB	880K	V2B1	III
8875	MORTISE	8875L	LEVER TRIM	373L	V7B1	II
8827	SVR	8827TP	THUMB PIECE	880TP	V11D9***	IV
8827	SVR	8827L	LEVER TRIM	373L	V12B4	II
8847	CVR	8847EO	NONE	N/A	V13D6*	IV
8847	CVR	8847TL	THUMBTURN	377T	V13D6*	IV
99	RIM	99EO	NONE	N/A	V1A1	II
99	RIM	99NL	CYLINDER/PLATE	990NL	V4A1	II
99	RIM	99NL	CYLINDER ONLY	110NL	V1A1	II
99	RIM	99TP	THUMB PIECE	990TP	V1A1	II
99	RIM	99K	KNOB	991K	V1A1	II
9975	MORTISE	9975L	LEVER TRIM	992L	V14B8	III
9975	MORTISE	9975K	KNOB	991K	V14B8	III
9927	SVR	9927EO	NONE	N/A	V1A1	II
9927	SVR	9927NL	CYLINDER/PLATE	990NL	V4A1	II
9927	SVR	9927NL	CYLINDER ONLY	110NL	V1A1	II
9927	SVR	9927TP	THUMB PIECE	990TP	V4A1	II
9927	SVR	9927L	LEVER TRIM	992L	V1A1	II
9927	SVR	9927K	KNOB	991K	V1A1	II
9947	CVR	9947EO	NONE	N/A	V1A1	II
9947	CVR	9947NL	CYLINDER/PLATE	990NL	V4A1	II
9947	CVR	9947NL	CYLINDER ONLY	110NL	V1A1	II
9947	CVR	9947L	LEVER TRIM	992L	V1A1	II

Universal Mounting Plates

MP&O	LEVEL	WIDTH	HEIGHT
U1A1	II	2"	13"
U2A1	II	3"	13"
U3D2	II	3"	13"
U4A7	II	2.5"	14.25"
U1D6	III	2"	13"
U1D7	III	2"	13"

Universal Mounting Plates do not match a specific manufacturer's templating and do not thru-bolt to exit devices. They are designed to thru-bolt around the exit device head and can be used with various, but not all exit devices.


All Universal Mounting Plates include 4 thru-bolts except the U3D2 MP&O which comes with 2 thru-bolts.

U1A1 & U2A1 replicate rim cylinder tailpiece

D2 operator used for Monarch 18 CVR

D6 operator used for lifting motion on different CVR devices

D7 operator used for lifting motion on Sargent CVR devices

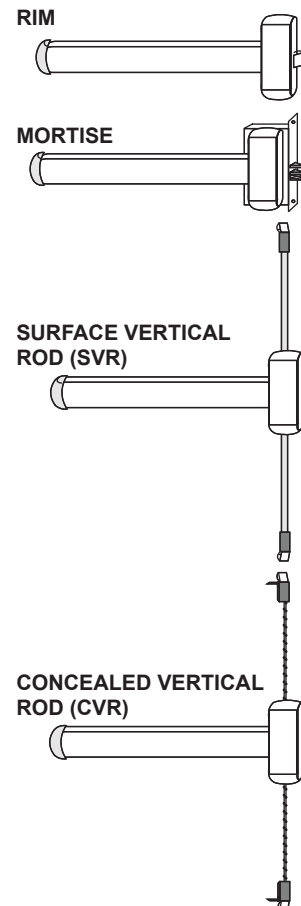

* Must use rod member #109112 for MP&O #V13D6
 ** Requires Von Duprin #CKNL kit to use MP&O #V15A1
 ***Specify Right Handed or Left Handed

We are constantly adding MP&O's based upon customer requests. If the MP&O for an exit device you need is not listed, please contact the factory and we'll work with you to meet your needs.

FIND YOUR EXIT DEVICE MODEL NUMBER. FIND THE CORRESPONDING MP&O. PLACE THE MP&O DESIGNATION INTO FIELD #4 ON THE LEXI MODEL BUILDER PAGE.

ALUMINUM DOOR SOLUTIONS

Jackson Exit Devices

MODEL	TYPE	MP&O	LEVEL
885	CVR	J2F1	III
1085	CVR	J2F1	III
1085	CVR	J6F1*	III
1285	CVR	J2F1	III
2085	CVR	J2F1	III
3185	CVR	J1H2	IV
1095	RIM	J3A4	III
1295	RIM	J4A5	III

Kawneer Exit Devices

STILE	TYPE	MP&O	LEVEL
WIDE	CVR	K1E1B**	VI
NARROW	CVR	K2E2**	V

Corbin/Russwin Exit Devices

MODEL	TYPE	DEVICE	EXTERIOR	MP&O	LEVEL	STILE
ED5000	RIM	ED5200		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED5000	SECURITY	ED5200S		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED5000	MORTISE	ED5600L	LEVER TRIM	Y2B1	II	N/A
ED5000	SVR	ED5400		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED5000	CVR	ED5800		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED4000	RIM	ED4200		Y1A1	I	N/A
ED4000	SVR	ED4400		Y1A1	I	N/A
ED4000	CVR	ED4800		Y1A1	I	N/A
ED6000	RIM	ED6200***	EXIT ONLY	Y1A1	I	N/A
ED6000	RIM	ED6200****	THUMBPIECE	C6L1	III	N/A
ED6000	RIM	ED6200	LEVER TRIM	C6L1	III	N/A
ED6000	RIM	ED6200	KNOB	C6L1	III	N/A
ED6000	SVR	ED6400***	EXIT ONLY	Y1A1	I	N/A
ED6000	SVR	ED6400****	THUMBPIECE	C6L1	III	N/A
ED6000	SVR	ED6400	LEVER TRIM	C5C2	III	N/A
ED6000	SVR	ED6400	KNOB	C6L1	III	N/A
ED6000	CVR	ED6800***	EXIT ONLY	Y1A1	I	N/A
ED6000	CVR	ED6800****	THUMBPIECE	C6L1	III	N/A
ED6000	CVR	ED6800	LEVER TRIM	C6L1	III	N/A
ED6000	CVR	ED6800	KNOB	C6L1	III	N/A
ED8000	RIM	ED8200	EXIT ONLY	C3A3	III	N/A
ED8000	RIM	ED8200	LEVER OR KNOB	C3A3	III	N/A
ED8000	SVR	ED8400	EXIT ONLY	C3A3	III	N/A
ED8000	SVR	ED8400	LEVER OR KNOB	C3A3	III	N/A

Adams-Rite Exit Devices

MODEL	TYPE	MP&O	LEVEL
8400	MORTISE	Contact Securitech	
8600-LHR	CVR	A2A8	II
8600-RHR	CVR	A3A8	II
8675-LHR	CVR	A2A8	II
8675-RHR	CVR	A3A8	II

Monarch Exit Devices

MODEL	TYPE	MP&O	LEVEL
17R	RIM	M1D2	II
17M	MORTISE	M1D2	II
18R	RIM	M3B9	II
18SVR	SVR	M2A1	II
19SVR	SVR	M4A1	II
19 R EO	RIM	M5A1	II

Doromatic Exit Devices

MODEL	TYPE	MP&O	LEVEL
1690	CVR	D4G2	III
990	CVR	D4G2	III
1990	CVR	D10G2	III
1790-RHR	RIM	D6G2	III
1790-LHR	RIM	D6G1	III
3700	RIM	D6G2	III

Detex Exit Devices

MODEL	TYPE	MP&O	LEVEL
V4001	RIM	T1A10	IV

Hager Exit Devices

MODEL	TYPE	MP&O	LEVEL
4500	RIM	H1A7	IV

ED5000 Series

All exits will accept trims.

Function of device is in trim not in the exit head.

The narrow Y1 plate should be used on new construction or doors not yet prepped for Corbin Russwin 700/900 trims.

The Y3 backplate is the same dimensions as the escutcheon for the 700/900 trim by Corbin Russwin. Use on retrofit projects.

ED4000 Series

All narrow-stile exits will accept trims.

Function of device is in trim not in the exit head.

The Y1A1 MP&O bolts directly to the head of the exit device.

ED8000 Series

Trim bolts thru door above and below device as well as once to head of device for alignment

*For retrofit. Covers old exterior trim holes.

**For use with PANELINE 350 Doors

***Requires upgrade cassette in exit device head to accept trim

****The C2 Plate will not cover all old thumbpiece holes

We are constantly adding MP&O's based upon customer requests. If the MP&O for an exit device you need is not listed, please contact the factory and we'll work with you to meet your needs.

LEXI™ MP&O Finder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

FIND YOUR EXIT DEVICE MODEL NUMBER. FIND THE CORRESPONDING MP&O. PLACE THE MP&O DESIGNATION INTO FIELD #4 ON THE LEXI MODEL BUILDER PAGE.

Yale Exit Devices

MODEL	TYPE	EXTERIOR	OPERATOR	MP&O	LEVEL	STILE
7100/7150	RIM	NONE	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	CYLINDER	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	THUMBPIECE	530	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	LEVER TRIM	520/620	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	KNOB	CA544	Y3A1	II	N/A
7130	MORTISE	NONE	N/A	Y2B1	II	N/A
7130	MORTISE	LEVER TRIM	520/620	Y2B1	II	N/A
7110	SVR	NONE	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7110	SVR	THUMBPIECE	530	Y1A1 / Y3A1	I / II	NARROW / WIDE
7110	SVR	LEVER TRIM	520/620	Y1A1 / Y3A1	I / II	NARROW / WIDE
7110	SVR	KNOB	CA544	Y3A1	II	N/A
7140	CVR	NONE	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7140	CVR	THUMBPIECE	530	Y1A1 / Y3A1	I / II	NARROW / WIDE
7140	CVR	LEVER TRIM	520/620	Y1A1 / Y3A1	I / II	NARROW / WIDE
7140	CVR	KNOB	CA544	Y3A1	II	N/A
7200	RIM	NONE	N/A	Y1A1	I	N/A
7200	RIM	CYLINDER	501	Y1A1	I	N/A
7200	RIM	THUMBPIECE	T14	Y1A1	I	N/A
7200	RIM	LEVER TRIM	500	Y1A1	I	N/A
7210	SVR	NONE	N/A	Y1A8	I	N/A
7210	SVR	CYLINDER	501	Y1A8	I	N/A
7210	SVR	THUMBPIECE	T14	Y1A8	I	N/A
7210	SVR	LEVER TRIM	500	Y1A8	I	N/A
7240	CVR	NONE	N/A	Y1A1	I	N/A
7240	CVR	CYLINDER	501	Y1A1	I	N/A
7240	CVR	THUMBPIECE	T14	Y1A1	I	N/A
7240	CVR	LEVER TRIM	500	Y1A1	I	N/A

Yale 7100 Series

All exit devices will accept trims. Function of device is in trim not in the exit head.

Y1A1 - The Y1 is a narrow plate and should be used on new construction or doors not yet prepped for Yale wide-stile trims.

Y3A1 - The Y3 is a wide backplate and uses the same dimensions as the escutcheon for the 520/620 lever trims. Use on retrofit projects.

The Y1 plate used with 7100 devices uses 4 thru-bolt studs.

Yale 7200 Series

All narrow stile exits will work with lever trims. Function of device is in trim not in the exit head.

Y1 plate bolts directly to head of 7200 narrow stile exit device in the middle 2 locations.

Sargent Exit Devices

MODEL	TYPE	MP&O	LEVEL
8400	CVR	S1D7	III
8400ET	CVR	S1D8	III
8600	CVR	S1D8	III
8810F	RIM	S2A1	I
8810RD	RIM	S2A1	I
8800R	RIM	S2A1	I
8880R	RIM	S2A1	I
8813	RIM	S2A1	I
8888R	RIM	S6A1	III
8300	MORTISE	S4B2	I
8700	SVR	S4B2	I
8900	MORTISE	S4B2	I
9804	RIM	S3A1	III
9900	MORTISE	S3C1	III
9900	MORTISE	S4B2	I
9700	SVR	S4B2	I
9800	RIM	S4B2	I

Precision Exit Devices

MODEL	TYPE	MP&O	LEVEL
110	RIM	P1A1	II
110	RIM	P3C1	III
1103R	RIM	P15C3	II
1203	SVR	P1A1	II
200	SVR	P15C1	II
1200	SVR	P1A1	II
1305	MORTISE	P2B1	II
2603	CVR	P8A1	II
2103	RIM	P9A1	II
2208	SVR	P10A1	II
2400	RIM	P13A1	II

*For retrofit. Covers old exterior trim holes.

Dorma Exit Devices

MODEL	TYPE	MP&O	LEVEL
9100	CVR	B1A1	II
5100	CVR	B2A7	II
5300	RIM	B2A7	II
9400	SVR	B1A1	II

American Devices

MODEL	TYPE	MP&O	LEVEL
6100-LHR	CVR	A4A1	II
6100-RHR	CVR	A5A1	II

We are constantly adding MP&O's based upon customer requests. If the MP&O for an exit device you need is not listed, please contact the factory and we'll work with you to meet your needs.

ELECTRA™

Complete Control Trim Packages With Mortise & Cylindrical Devices



Easy Installation To Existing Doors

Does not require cutting into frame for electric strike.

Easy “No Special Knowledge” Operation

Unlock the lever by key, card access, keypad, intercom, push-button or other release.

Slip Clutch Lever Handle

Stands up to abuse; will break-away when forced; easily reset by just lifting up.

Stainless Steel Lever

Durable, rugged one-piece construction. Meets ADA Code.

Eliminates Request-To-Exit Devices

Models available with request-to-exit built into the interior lever.



ELECTRA™ Mortise



ELECTRA™ Cylindrical

ELECTRA™ Mortise

Designed for doors with mortise openings. Mortise lock body options allow installation on different types of doors, including steel, wood, narrow stile aluminum or gates. Complete package includes hardware.



“A” Series Mortise Lock




Mini-Mortise Lock



Narrow Stile Lock

ELECTRA™ Cylindrical

Designed for doors with cylindrical openings. Complete package includes hardware.

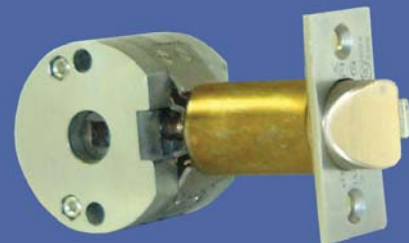

**Cylindrical Prep
(Fits 2 1/8" x 1" cross bore door prep)**

ELECTRA™ Model Builder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

1	Electra M	MLA	With "A" Series Mortise Lock
		MLP	MLA With Door Position Sensor
		MLS	With "S" Series Mortise Lock
		MLM	With Mini-Mortise Lock
		MLN	With Narrow-Stile Mortise Lock
		MLX	Mortise Lock By Others (Contact Factory)
		MLD	MLX With Spindle On Diamond
		M	Change "L" To "M" For Maglock Control Models (Field #4 Required for all Maglock Models)
Electra C	CLS	With 2-1/4" Wide Mounting Plate	
	CLW	With Extra Wide 3-1/2" Mounting Plate	
	CMS	CLS With Maglock Control	
	CMW	CLW With Maglock Control	
			<input type="checkbox"/>

ENTER MODEL CODE

EXAMPLE: *MLA-G20-D24-E1-630-LHR*

1 2 3 4* 5* 6 7

*Fields 4 & 5 are optional.

FAIL-SECURE LOCKING



Fail-Secure locking is available in Single-Entry Storeroom Function or Classroom Function. Fail-Secure models stay locked at all times, unless unlocked by key. In the event of an emergency the locks remained secured.

FAIL-SAFE (STAIRWELL) RE-ENTRY LOCKING



Re-Entry (stairwell) locking fills the need where a door needs to be secured during normal operation, but is also a means of escape or refuge in the event of an emergency. Many building codes mandate re-entry every fourth floor in a high-rise building. Build a Fail-Safe, Stairwell, Re-Entry Model using the "R" Functions.

Example: *MLS-G20-R11-630-RHR*

2	LEVER	TRIM	G2	GG Style Trim; Durable, Slip Clutch Model (vandal-resistant)
		LEVER	0	Standard With Return
			2	Tapered
			3	Tubular With Return
3	FUNCTION	D11	Fail-Secure; Entry By Key; 24vDC Electric Release; Single Entry	
		D21	Fail-Secure; Entry By Key; 24vDC Electric Release; Request-To-Exit; Single Entry	
		D23	Fail-Secure; Entry By Key; 24vDC Electric Release; Key Usage Switch; Request-To-Exit; Single Entry	
		R21	Fail-Safe; Entry By Key; 24vDC Re-Entry Function; Request-to-Exit; Single Entry	
				See Function Chart (Page E1.0)
4	OPTIONAL MAGLOCK	OPTIONAL (For Maglock Control Only)		
		E0	Maglock By Others	
		E1	1,200 lb. Holding Force Electromagnetic Lock	
		E2	E1 With Bond Sensor	
		E3	E1 With Door Status Switch	
5	SPECIAL OPTIONS	E4	E1 With E2 & E3 Features	<input type="checkbox"/>
		SPECIAL OPTIONS (List As Needed)		
		F1	Lever Position Switch	
		F3	Thick Door (2-2 1/2)	
		F4	LED Lever Release Indicator	
		F5	Security Fasteners	
F6	Piezo Sounder For Lever	<input type="checkbox"/>		
6	FINISH	630	Satin Stainless Steel	
		605	Bright Brass	
		606	Satin Brass	
		611	Bright Bronze	
		612	Satin Bronze	
		613	Oil Rubbed Bronze	
		625	Bright Chrome	
		626	Satin Chrome	
629	Bright Stainless Steel	<input type="checkbox"/>		
7	DOOR HANDING	LHR	Left Hand Reverse Door	
		RHR	Right Hand Reverse Door	
		LH	Left Hand Door	
		RH	Right Hand door	<input type="checkbox"/>




ELECTRA™ Cylindrical



ELECTRA™ Mortise

Complete control trim packages for mortise and cylindrical locks.

Use For: *Apartment Building Entrances*
Dormitory Entrances
Stairwell Doors, Fail-Safe, Re-Entry Doors
Computer Rooms
Other Applications

**MLA-G20-D11-630-(RHR, RH, LHR, LH)**

Complete control trim package with fire-rated mortise deadlatch lockset
D11 Function; 24vDC release, single entry, fail-secure

MLA-G20-D21-630-(RHR, RH, LHR, LH)

Complete control trim package with fire-rated mortise deadlatch lockset
D21 Function; 24vDC release, single entry, fail-secure, request-to-exit

MLA-G20-D24-630-(RHR, RH, LHR, LH)

Complete control trim package with fire-rated mortise deadlatch lockset
D24 Function; 24vDC release, single entry, fail-secure, key usage switch, latch position switch, request-to-exit

MLA-G20-R11-630-(RHR, RH, LHR, LH)

Complete control trim package with fire-rated mortise deadlatch lockset
R11 Function; 24vDC re-entry release, single entry, fail-safe

MLA-G20-R21-630-(RHR, RH, LHR, LH)

Complete control trim package with fire-rated mortise deadlatch lockset
R21 Function; 24vDC re-entry release, single entry, fail-safe, request-to-exit

MLA-G20-R24-630-(RHR, RH, LHR, LH)

Complete control trim package with fire-rated mortise deadlatch lockset
R24 Function; 24vDC re-entry release, single entry, fail-safe, request-to-exit, key usage switch, latch position switch

MLN-G20-D21-630-(RHR, RH, LHR, LH)

Complete control trim package with mortise lock for narrow stile aluminum door or gate
D21 Function; 24vDC release, single entry, fail-secure, request-to-exit

CLS-G20-D21-630-(RHR, RH, LHR, LH)


Complete control trim package for cylindrical lock opening; including fire-rated deadlatch
D21 Function; 24vDC release, single entry, fail-secure, request-to-exit

CLS-G20-D24-630-(RHR, RH, LHR, LH)

Complete control trim package for cylindrical lock opening; including fire-rated deadlatch
D24 Function; 24vDC release, single entry, fail-secure, key usage switch, latch position switch, request-to-exit


ACCED™

Complete Control Trim Packages With Exit Devices

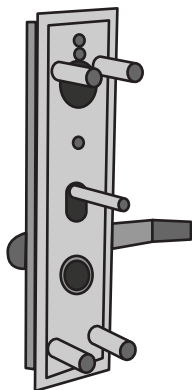

Exterior Lever

Electric Release protected within trim



Exit Device

Available in Rim (R), Mortise (M), Concealed Vertical Rod (CVR), Surface Vertical Rod (SVR) and Rim Bolt (RB) Exit Devices

For use on steel or wood doors, wide-stile aluminum doors, aluminum doors with mid-rails or gates with mounting area.

Electric strike is not required; Electric release is within exterior trim

Exterior trim is released by key or electric release

Free egress from interior at all times

“No Special Knowledge”

Request-To-Exit available

UL Listed as Panic Exit Hardware, Fire-Rated models also available

Thru-bolted Design

Independent lever springs resists sagging

Internal clutch and lever movement restrictors protect the devices

Power transfer (electrified hinge, cable, door cord or other method) to door is required (see page E5.1 for options)

Patented cylinder holding method grasps cylinder at two points

ACCED™ Model Builder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

1	Acced R	EDR	Rim Exit Device
		FDR	Fire-Rated Rim Exit Device
		-N	Narrow-1-5/8" Cover***
		EMR	Rim Device With Maglock Control
		FMR	Fire-Rated Rim Device With Maglock Control
Acced SVR	EDS	Surface Vertical Rod Exit Device	
	FDS	Fire-Rated Surface Vertical Rod Exit Device	
	-N	Narrow-1-5/8" Cover***	
	EMS	Surface Vertical Rod With Maglock Control	
	FMS	Fire-Rated EMS Surface Vertical Rod With Maglock Control	
Acced CVR	EDC	Concealed Vertical Rod Exit Device	
	FDC	Fire-Rated Concealed Vertical Rod Exit Device	
	-N	Narrow-1-5/8" Cover***	
	EMC	Concealed Vertical Rod With Maglock Control	
	FMC	Fire-Rated Concealed Vertical Rod With Maglock Control	
Acced M	EDM	Mortise Exit Lock	
	FDM	Fire-Rated Mortise Exit Lock	
	EMM	Mortise Device With Maglock Control	
	FMM	Fire-Rated Mortise Device With Maglock Control	
	Acced RB	EDB	Rim Bolt Exit Device
FDB		Fire-Rated Rim Bolt Exit Device	
-N		Narrow-1-5/8" Cover***	
EMB		Rim Bolt Device With Maglock Control	
FMB		Fire-Rated Rim Bolt Device With Maglock Control	

ENTER MODEL CODE

EXAMPLE: EDR-G20-D24-AI-E1-630-LHR

1 2 3 4* 5** 6** 7 8
 *Field 4; Door & Wiring are required, Height & Dogging are optional.
 **Fields 5 & 6 are optional.
 ***Add designation after series code.

FAIL-SECURE LOCKING



Fail-Secure locking is available in Single-Entry Storeroom Function or Classroom Function. Fail-Secure models stay locked at all times, unless unlocked by key. In the event of an emergency the locks remained secured.

FAIL-SAFE (STAIRWELL) RE-ENTRY LOCKING




Re-Entry (stairwell) locking fills the need where a door needs to be secured during normal operation, but is also a means of escape or refuge in the event of an emergency. Many building codes mandate re-entry every fourth floor in a high-rise building. Build a Fail-Safe, Stairwell, Re-Entry Model using the "R" Functions.

Example: EDR-G20-R24-AI-E0-630-LHR

2	TRIM	G2	GG Style Trim; Durable, Slip Clutch Model (vandal-resistant)	
		LEVER	0	Standard With Return
			2	Tapered
			3	Tubular With Return
4	Tapered With Return			
3	FUNCTION	D11	Fail-Secure; Entry By Key; 24vDC Electric Release; Single Entry	
		D21	Fail-Secure; Entry By Key; 24vDC Electric Release; Request-To-Exit; Single Entry	
		D23	Fail-Secure; Entry By Key; 24vDC Electric Release; Key Usage Switch; Request-To-Exit; Single Entry	
		R21	Fail-Safe; Entry By Key; 24vDC Re-Entry Function; Request-to-Exit; Single Entry	
		See Function Chart (Page E1.0)		
DOOR	A	30" - 36" Wide Doors		
	B	36 1/2" - 48" Wide Doors		
	C	24" - 29 1/2" Wide Doors		
WIRING	I	Internal Wiring (at back of bar)		
	T	Armored Transfer Cable (hinge side of bar)		
	L	Internal Wiring With Long Leads		
4	HEIGHT	Vertical Rod Models Only (7" Is Standard)		
		8	For Doors Up To 96"	
		10	For Doors Up To 120"	
MECHANICAL DOGGING	OPTIONAL (Electric Dogging Is Standard)			
	D	Allen Keyed Dogging		
	KD	Cylinder Keyed Dogging		
5	OPTIONAL MAGLOCK	OPTIONAL (Not available for Fire-Rated Models)		
		E0	Maglock By Others	
		E1	1,200 lb. Holding Force Electromagnetic Lock	
		E2	E1 With Bond Sensor	
		E3	E1 With Door Status Switch	
E4	E1 With E2 & E3 Features			
6	SPECIAL OPTIONS	SPECIAL OPTIONS (List As Needed)		
		F1	Lever Position Switch	
		F3	Thick Door (2-2 1/2)	
		F4	LED Lever Release Indicator	
		F5	Security Fasteners	
		F6	Piezo Sounder For Lever	
7	FINISH	630	Satin Stainless Steel (Standard)	
		605	Bright Brass	
		606	Satin Brass	
		611	Bright Bronze	
		612	Satin Bronze	
		613	Oil Rubbed Bronze	
		625	Bright Chrome	
		626	Satin Chrome	
629	Bright Stainless Steel			
8	DOOR HANDING	LHR	Left Hand Reverse Door	
		RHR	Right Hand Reverse Door	

Complete control trim & exit device packages.

Use For: *Maternity Wards*
Intensive Care Units
Stairwell Towers, Fail-Safe Re-Entry Doors
Dormitory Entrances
Fire Exits
Computer Rooms
Other Applications

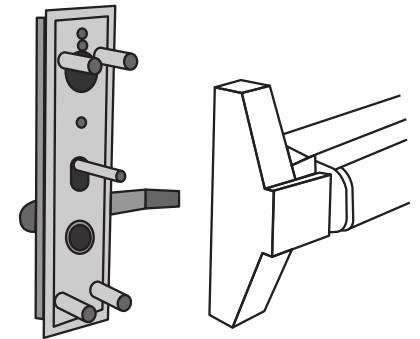**EDR-G20-D24-AI-630-(RHR or LHR)**

Complete control trim package with rim exit device for 30" to 36" wide doors.

D24 Function; 24vDC release, single entry, fail-secure, key usage switch, latch position switch, request-to-exit**EDR-G20-D21-AI-630-(RHR or LHR)**

Complete control trim package with rim exit device for 30" to 36" wide doors.

D21 Function; 24vDC release, single entry, fail-secure, request-to-exit**EDR-G20-R24-AI-630-(RHR or LHR)**

Complete control trim package with rim exit device for 30" to 36" wide doors

R24 Function; 24vDC re-entry release, single entry, fail-safe, key usage switch, latch position switch, request-to-exit**EDR-G20-R21-AI-630-(RHR or LHR)**

Complete control trim package with rim exit device for 30" to 36" wide doors.

R21 Function; 24vDC re-entry release, single entry, fail-safe, request-to-exit**FDR-G20-D24-AI-630-(RHR or LHR)**

Complete fire-rated control trim package with rim exit device for 30" to 36" wide doors.

D24 Function; 24vDC release, single entry, fail-secure, key usage switch, latch position switch, request-to-exit**FDR-G20-D21-AI-630-(RHR or LHR)**

Complete fire-rated control trim package with rim exit device for 30" to 36" wide doors.

D21 Function; 24vDC release, single entry, fail-secure, request-to-exit**FDR-G20-R24-AI-630-(RHR or LHR)**

Complete fire-rated control trim package with rim exit device for 30" to 36" wide doors.

R24 Function; 24vDC re-entry release, single entry, fail-safe, key usage switch, latch position switch, request-to-exit**FDR-G20-R21-AI-630-(RHR or LHR)**

Complete fire-rated control trim package with rim exit device for 30" to 36" wide doors.

R21 Function; 24vDC re-entry release, single entry, fail-safe, request-to-exit

POWER SUPPLIES

Power Solutions for Access Control, Intercom, Remote Release & Alarms



Single Door, Two Door and Timed Release Power Supplies

Securitech offers a wide range of power supplies to meet door release needs and custom electric release requirements.

All power supplies include LED power light indicators on the cover.

Please note: Standard 24vDC release is provided by many access control system power supplies and may eliminate the need for a Securitech power supply.

Single Door Power Supplies

Access Control, Intercom (Dry Contact) or Remote Release

PS-D111	24vDC Release	Trim Function Begins With "D"
PS-A111	24vAC (30VA) Release	Trim Function Begins With "A"
PS-R111	Re-Entry DC Power	Trim Function Begins With "R"

Intercom Voltage (16vAC) Release (Wet Input) or Dry Contact

PS-A112	24vAC (30VA) Release	Trim Function Begins With "A"
---------	----------------------	-------------------------------

Access Control For Double Sided Trim With Fail-Safe Exiting, Fail-Secure Entry

For locations requiring access control on both sides of the door; Becomes Fail-Safe with loss of power.

PS-D121	24vDC Release	Custom ELECTRA™ Model - Contact Factory
---------	---------------	---

Electromagnetic Lock Power Supplies

Add the following designation to any power supply listed above to add power for Electromagnetic Lock
 -E 24vDC Electromagnetic Lock Power

Two Door Power Supplies

Access Control, Intercom (Dry Contact) or Remote Release

PS-D131	24vDC Release	Trim Function Begins With "D"
PS-A131	24vAC (30VA) Release	Trim Function Begins With "A"
PS-R131	Re-Entry DC Power	Trim Function Begins With "R"

Intercom Voltage Release (16vAC Wet Input or Dry Contact)

PS-A132	24vAC (30VA) Release	Trim Function Begins With "A"
---------	----------------------	-------------------------------

Timed Release Power Supplies

Programmable Timer Keeps Doors Unlocked For Extended Periods Programmable for nights, weekends and holidays

Common Applications: Employee Entrances, Schools, Laundry Rooms, Restrooms

PS-D141	24vDC Release	Trim Function Begins With "D"
PS-R141	24vDC Release	Trim Function Begins With "R"

POWER TRANSFERS

Door Cords

An inexpensive method of transferring up to 8 wires where aesthetics and vandalism are not great concerns. Features stainless steel armored cable. For use on hollow metal or aluminum doors.

DC1-18 18" Loop; Stainless Steel Cable
 DC1-24 24" Loop; Stainless Steel Cable

Available in Aluminum (A) or Duronodic (D) finish



The wires are connected and covered under the cap

Panic Bar Retrofit Cords

An armored cable to be installed below the panic bar when adding a LEXI™ trim to an existing bar. Package includes wire, mounting clips for under bar and steel clips for mounting to the frame.

PTC-48 For doors up to 36"; Stainless Steel Cable
 PTC-60 For doors up to 48"; Stainless Steel Cable



Cable provided to reach across door, create loop, and mount on frame

Electric Mini-Hinges

Geared continuous hinges are used on high-traffic doors. Geared mini-hinges may be added to existing doors when electrified trim is used. The entire hinge need not be replaced. The top 1-1/2" is removed and the mini-hinge installed in it's place. Mini-hinges are much friendlier to installers than full-length electrified hinges. A serviceman can check connections without removing the entire door when a mini-hinge is used.

ECHFM-R Full Mortise; Matches Roton 780-112 (available with 4 or 6 wires)
 ECHFM-Z Full Mortise; Matches Zero 910 (available with 4 or 6 wires)
 ECHFS-R Full Surface; Matches Roton 780-157 (4 wires)
 ECHFS-Z Full Surface; Matches Zero 935 (4 wires)
 ECHHS-R Half Surface; Matches Roton 780-054 (4 wires)
 ECHHS-Z Half Surface; Matches Zero 920 (4 wires)

Available in Aluminum (AL) or Duronodic (DU) finish



Geared hinge manufacturers do not share common sizes. Please identify mfr. and model when ordering.

Electrified Hinges

The cleanest method of transferring power from the frame where the door is hung by hinges. Recommended for new construction or retrofit into frames without concrete. Available in 4, 6, 8 or 10 wire models. See price list for available sizes. Optional door position switch provides valuable information to access control system.

EH4040-626-4 4 wires, 4" tall, 4" wide; Satin Chrome Finish
 EH4540-626-4 4 wires, 4.5" tall, 4" wide; Satin Chrome Finish
 EH4545-626-4 4 wires, 4.5" tall, 4.5" wide; Satin Chrome Finish
 EH5045-626-4 4 wires, 5" tall, 4.5" wide; Satin Chrome Finish
 EH5050-626-4 4 wires, 5" tall, 5" wide; Satin Chrome Finish





An electrified hinge must match the existing hinge. Determine the height. Determine the open width by measuring across the two leafs and knuckle when open.

TransX™

TransX™ connects multiple wires from the door to the frame in a concealed, protected manner. Trim wires run through the door into the TransX™ door module (the lower box). The wire passes from the frame module to the bottom side of the terminal strip. Access control technicians or electricians bring their low voltage wires through conduit into the TransX™ frame module and connect to the upper side of the terminal strip.

PTB-106-(hand) 6 Terminal Strips; Mounts On Pull Side Of Door, Designate LH or RH
 PTB-110-(hand) 10 Terminal Strips; Mounts On Pull Side Of Door, Designate LH or RH

TransX is mounting on the pull side of the door. To designate handing stand on the interior side of the door, check if the hinges are on the right or the left.

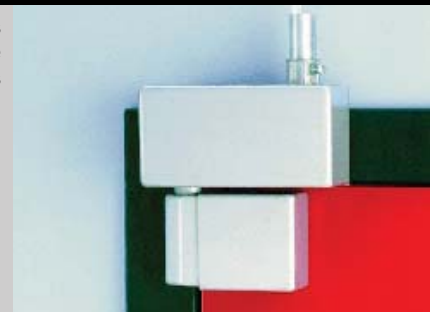

YAMAKA™

An innovative method for hollow metal, aluminum (YMK-20) or wood doors (YMK-21). The module (A.) mounts in the top of the door, with the spring loaded tips protruding above the door. As the door closes, the tips make contact with the transfer plate (B.) which is mounted to the frame. Tested for 1 million cycles. Not for Fail-Safe applications.

YMK-20 Mounts on top of door, flat plate onto header, for hollow metal or aluminum doors
 YMK-21 Mounts in frame, flat plate on door, for wood doors





RACHIE™

Entry & Exit Control Systems

CODE-COMPLIANT MANTRAPS & SALLY PORTS

Customized for:



- Psychiatric Hospitals
- Detention Facilities
- Laboratories
- Financial Institutions
- Government Facilities
- Retail Stores

Securitech Entry & Exit Control Systems provide:

- Basic Two Door Packages
- Custom Two, Three Or More Door Systems
- Fail-Secure & Fail-Safe Options
- Dual Security: Mechanical & Electromagnetic
- Custom Operating Scenarios

Special Entry & Exit Control Special Conditions:

- Emergency Key Override For Use By Staff
- Momentary Shunting To Move Groups Through The Sally Port or Mantrap
- Automatic Operators For Transporting Carts

How Does It Work?

Standard mantraps and sally ports provide a controlled passageway where only one door in the passageway can be opened at a time.

A mantrap or sally port may contain 2 or more doors.

A mantrap or sally port may be connected to an overhead door.

Securitech's basic two door Entry & Exit Control Systems expand on the basic mantrap or sally port system. By using dual-locking technology, Securitech can create systems which provide operational security and meet special operational and life-safety needs.

Securitech's Custom 2, 3, and 4 door Entry & Exit Control Systems start with a blank piece of paper; the end-user lists all of their requirements and Securitech creates the system which fulfills those needs.

ELEMENTS:



DESCRIPTIONS

Controller & Power Supply

- Power/Control in one unit
- Includes full wiring schematic inside cover
- Easy to read terminal strip labels

Door Release Console

- One button per door
- Door Status LED's

Lever Trim Units

- Slip-Clutch Lever
- Key Override
- Optional 24vDC Release
- Optional 2nd Cylinder


Electromagnetic Lock

- 1200 lb. Holding Force
- Slim Design
- Bond Sensor
- Door Status Switch

RACHIE™ Popular Models

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

TRIM IDENTIFICATION CHART

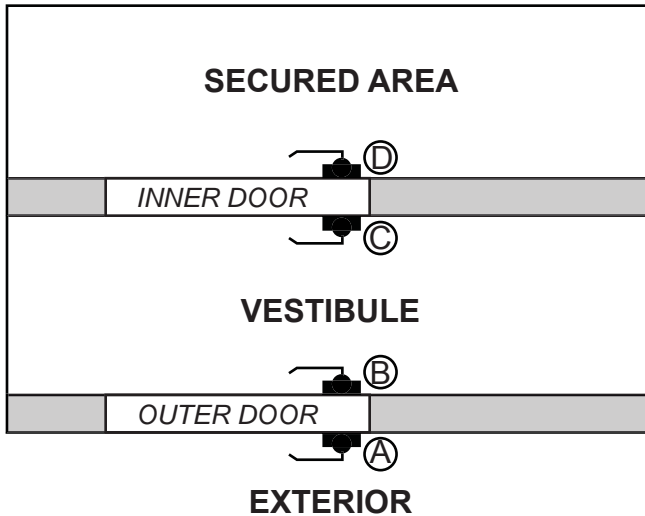

Securitech offers two types of out-of-the-box Interlocks, each with different operating scenarios, as described below.

RA-M100 series models include electrically and key released trim, mortise locks and electromagnetic locks. The key override is restricted by the interlock control.

RA-E100 series models include electrically and key released trim and mortise locks. The key overrides the interlock control at all times, so violations are possible.

The different systems in each series reflect the individual trim function at loss of power (fail-safe or fail-secure). RACHIE™ systems provide operational and life-safety compliance, in addition to the standard interlock.

FULL INTERLOCK SYSTEMS

Controller #
RA-M100

- Description:
1. 2 door interlock controller
 2. Card access, console or key release
 3. Requires 110v hook-up
 4. Fire-Alarm cut-off*
 5. Used with RA-M101, 102, 103 or 104

INTERLOCK SYSTEM DESCRIPTIONS

With Electromagnetic Locks

Lever Trim Locking Status At Power Loss

A	B	C	D
Outer Exterior	Outer Vestibule	Inner Vestibule	Inner Secure Area

System #:

System #	A	B	C	D
RA-M101	Secure	Safe	Secure	Secure
RA-M102	Secure	Safe	Secure	Safe
RA-M103	Secure	Safe	Safe	Safe
RA-M104	Safe	Safe	Safe	Safe

Interlock Type: *Electrically or key released trim.*
Release of trim (by card access, console or key) unlocks lever momentarily. Lever may be pulled downward and retract latch and release electromagnetic lock only when the door in the interlock is closed.

FAIL-SECURE *Locked at all times, including loss of power*
Card access, console or key can unlock, subject to mantrap control.
Key required to release lever at loss of power.

FAIL-SAFE *Normally locked, unlocks at loss of power.*
Card access, console or key can unlock, subject to mantrap control.
Free operation (Fail-Safe, Re Entry) at loss of power.

Note: Fire Alarm cut-off is same as "Loss of Power"

KEY OVERRIDE AT ALL TIME SYSTEMS

Controller #
RA-E100

- Description:
1. 2 door interlock controller
 2. Card access, console or key release
 3. Requires 110v hook-up
 4. Fire-Alarm cut-off*
 5. Used with RA-E101, 102, 103 or 104

INTERLOCK SYSTEM DESCRIPTIONS

Electric Trim Only

Lever Trim Locking Status At Power Loss

A	B	C	D
Outer Exterior	Outer Vestibule	Inner Vestibule	Inner Secure Area

System #:

System #	A	B	C	D
RA-E101	Secure	Safe	Secure	Secure
RA-E102	Secure	Safe	Secure	Safe
RA-E103	Secure	Safe	Safe	Safe
RA-E104	Safe	Safe	Safe	Safe

Interlock Type: *Electrically or key released trim.*
Release of trim (by card access, or console) unlocks lever momentarily. Pulling lever downward retracts latch of the other door in the interlock is closed.
Release of trim by key will violate mantrap and allow door to open at any time.

FAIL-SECURE *Locked at all times, including loss of power*
Card access or console can unlock, subject to mantrap control.
Key release lever at all times.

FAIL-SAFE *Normally locked, unlocks at loss of power.*
Card access or console can unlock, subject to mantrap control.
Key releases lever at all times.
Free operation (Fail-Safe, Re Entry) at loss of power.

Note: Fire Alarm cut-off is same as "Loss of Power"

ARTE™

ADVANCED REQUEST-TO-EXIT
Lever Controlled Request-To-Exit Switch

Code-Compliant Release Of Electromagnetic Locks



Eliminates the need for push-button, IR sensors & other magnetic releases

Works With Access Control Systems
& Electromagnetic Locks

Internal Lever Activated Switch

Switch Interrupts Power To Electromagnetic Lock

Signal Switch Sends R-T-E Signal To
Access Control Or Alarm System

Wide Variety Of Models,
Including Mortise & Cylindrical Latches

Internal Lever Movement Restrictors
Reduce Wear & Tear On Locks

Lever Designed for ADA Compliance

UL Rated Switches

Rigid Non-Switch Trim Available For Exterior Pull
(Non-Latch Lock Models)



How Does It Work?

Moving the interior lever activates a switch or switches. This can release an electromagnetic lock, send a signal to an access control or alarm system or do both functions. In addition, the mortise and cylindrical latch models provide positive mechanical latching to keep the door in place and meet fire code requirements. Exterior trim does not contain a cylinder or electric release.

ARTE™ Model Builder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

SERIES	STL	Lever Trim Only; No Lock Control	<input type="text"/>
	STA	Lever Trim With "A" Series Mortise Lock	
	STP	STA With Door Position Sensor	
	STC	Lever Trim With Cylindrical Latch set	
	STX	Lever Trim With Mortise Lock By Others**	
	M	Change "T" To "M" For Maglock Control Models	

ENTER MODEL CODE

EXAMPLE: STL-G10-S-E1-630-LHR

1
2
3
4*
5*
6*
7
8

*Fields 4, 5 & 6 are optional.

**Must be compatible, Contact Factory

ARTE APPLICATIONS

Medical Facilities - Secured Ward

Universities - Dorm Entrance

ARTE POPULAR MODELS

STL-G10-SJN-EO

Single Trim with Jack-Nuts; No lock control

Replaces the need for P-I-R signal

STA-G10-PTB-EO

Pair of trims with Thru-Bolts; "A" series mortise lock

Single motion latching; "No Special Knowledge"

TRIM	G1	GG Style Trim; Non Slip-Clutch Model	<input type="text"/>
LEVER	0	Standard With Return	<input type="text"/>
	2	Tapered	
	3	Tubular With Return	
	4	Tapered With Return	
TRIM SIDES	S	Single Trim	<input type="text"/>
	P	Pair; Exterior Lever Does Not Have Switches	
MOUNT OPTIONS	OPTIONAL (Single Trim Models Only)		<input type="text"/>
	JN	Jack-Nuts	
MOUNT OPTIONS	TB	Thru-Bolt	<input type="text"/>
	OPTIONAL (For Maglock Control Only)		<input type="text"/>
OPTIONAL MAGLOCK	E0	Maglock By Others	<input type="text"/>
	E1	1,200 lb. Holding Force Electromagnetic Lock	
	E2	E1 With Bond Sensor	
	E3	E1 With Door Status Switch	
	E4	E1 With E2 & E3 Features	
SPECIAL FUNCTIONS	SPECIAL FUNCTIONS ARE OPTIONAL (List As Needed)		<input type="text"/>
	F1	Lever Position Switch	
	F3	Thick Door (2-2 1/2)	
	F5	Security Fasteners	
	F7	Exterior Lever Activated Switch	
FINISH	630	Satin Stainless Steel	<input type="text"/>
	605	Bright Brass	
	606	Satin Brass	
	611	Bright Bronze	
	612	Satin Bronze	
	625	Bright Chrome	
	626	Satin Chrome	
629	Bright Stainless Steel		
DOOR HANDING	LHR	Left Hand Reverse Door	<input type="text"/>
	RHR	Right Hand Reverse Door	
	LH	Left Hand	
	RH	Right Hand	



MECHANICAL LOCKING

Forced Entry Solutions For Concealing Cylinders, Multi-Point Locks & Exit Doors



SECURIGUARD™



MP POLICE LOCK™




SERPENT™



MULTI-BOLT



AUTO-BOLT

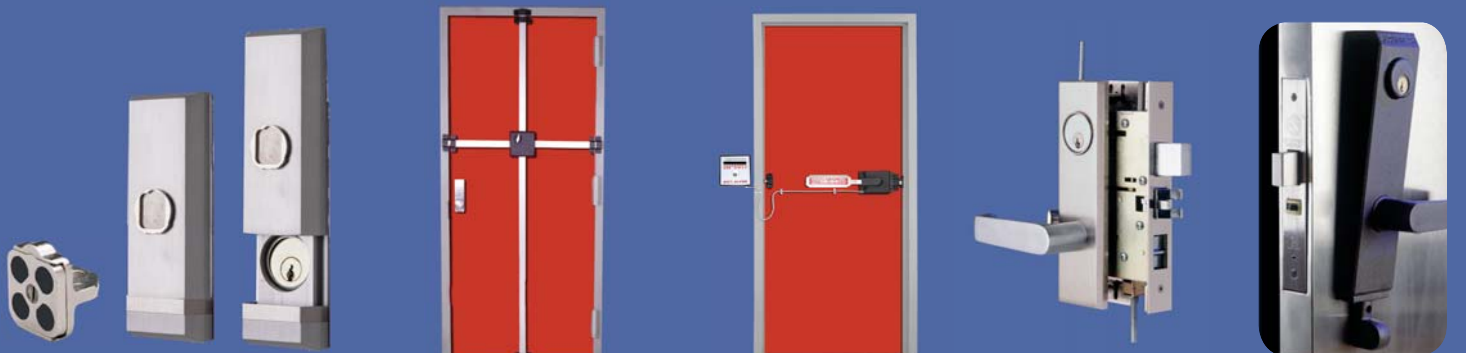

SECURIGUARD™

MP POLICE LOCK™

SERPENT™

MULTI-BOLT

AUTO-BOLT

Securitech offers mechanical locking systems for both retrofit and new construction applications.

Our mechanical locks are the result of providing carefully developed solutions for numerous custom applications.

Innovative methods of protecting against break-ins, vandalism and sabotage.

From surface mounted to internal locks, Securitech can meet existing and emerging security needs.

MECHANICAL LOCKING

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

Forced Entry Solutions

Cylinder Protection

SECURIGUARD™

6000 Series



For Storefront Doors

Protects against cylinder vandalism

Simple access control for limiting authorized key usage.

Available models designed to fit over removable core or standard cylinders.

6300

Use over standard or high-security cylinders. Furnished with 2 keys.

6302

For use with "Schlage" deadbolts. Includes modified filler plate & collar.

6305

Combination of 6300 & BAP*. For use with "Best" or other raised face removable core cylinders.

*Best Adapter Plate

Multi-Point Locking Systems

MP POLICE LOCK™

4800 Series



For Doors Requiring Maximum Protection Against Break-Ins

Bolts the door to the frame at up to 4 independent locations.

4840

4-Point Lock. (2 Vertical, 2 Horizontal)

4822

2-Point Lock. (2 Vertical)

4820

2-Point Lock. (2 Horizontal)

SERPENT™

SEL Series



Exit Locking System Which Deadbolts Both Sides Of The Door

2-Point Deadbolt Locking (not a latch)

Exterior Stainless Steel Anti-Pry Plate

SEL-100

Manual Locking

SEL-110: Includes Battery Alarm
SEL-120: Includes Direct Power Alarm

SEL-200

Self-Relocking

SEL-210: Includes Battery Alarm
SEL-220: Includes Direct Power Alarm

SEL-GK2

Glass Door Kit

Designed For Aluminum Doors 34" or 36" Wide

MULTI-BOLT™

7000 Series



Full Function Mortise Lock & Exit Device With Multi-Point Locking

Vertical bolts concealed within the door.

One action locks or unlocks all the deadbolts simultaneously.

Toughbar

Heavy duty touchbar prevents vandalism.

Lever

GG style lever trim can be used in place of touch bar.

Key Only

Cylinder only option replaces touch bar or lever trim.

Multi-Bolt Interior Options

AUTO-BOLT™

8000 Series



Instant Deadbolt Protection Each Time The Door Closes

Choose from single, 2, 3 or 4 point locking models.

Trigger activated locking

44

Storeroom Lever
Rotating the key unlocks the lever temporarily. Removing the key relocks the lever.

45

Classroom Lever
Rotating key clockwise unlocks the lever until key is rotated counter clockwise.

46

Storeroom With Electric Release
Storeroom lever with access control. Uses a 24vDC electric release.

TRIM FUNCTIONS





TABLE OF CONTENTS



MECHANICAL LOCKING

Cylinder Protection

Multi-Point Secondary Locks (Surface Applied, Non Emergency)

2-Point Emergency Exit Locks

Concealed Multi-Point Mortise Locks & Panic Devices

Automatic Dead Bolt Locking & Exit Devices

Forced Entry Solutions



Securiguard(6000).....M1.0

MPPoliceLock(4800).....M2.0

Serpent(SEL).....M3.0

Multi-Bolt(7000).....M4.0

Auto-Bolt (8000).....M5.0





SECURIGUARD™

Concealed Cylinder Resists Vandalism, Bumping & Unauthorized Key Use

Designed To Fit Over Removable Core or Standard Cylinders



What is "Bumping"?

Burglars take a regular key and mill it down, creating a "Bump Key". It is inserted into the lock and with a tap of a hammer on the "Bump Key" the lock opens. It's so easy an eight-year-old can do it!



The technique has been around for over 20 years and is spreading like wildfire thanks to the internet.

SECURIGUARD™ Protects Against

- Bumping
- Unauthorized Key Use
- Vandalism
 - Picking
 - Wrenching
 - Crazy Glue

SECURIGUARD™ Offers

- Bump Key Protection
- Simple Access Control
- 100% Cylinder Concealment
- Prevention Of Cylinder Icing
- Easy Installation
- Special Magnetic Keys That Cannot Be Duplicated
- Ease Of Use



MODEL #6300

Size

Height: 5 3/4"

Width: 2"

Depth: 1 3/8"

Finish: Clear Aluminum

Furnished with 2


Magnetic Keys

SECURIGUARD™ Stops Crazy Glue & Bump Keys

Securiguard™ has a sliding shield that covers the cylinder. Prevents vandalism by Crazy Glue and "Bump Keys" cannot be used.

The shield is raised and lowered via a special magnetic key.

When the shield is up, the key can be used. When the shield is down, the cylinder is 100% concealed.

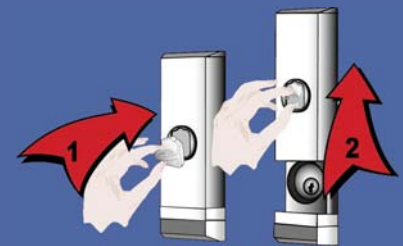

SECURIGUARD™ Key Info

There are millions of Securiguard™ key combinations. Additional keys can be ordered and Securiguard™ can be ordered to work with the same magnetic key. Regular magnets cannot open the Securiguard™.




SECURIGUARD™ Model Builder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

MODELS	6300	Use Over Standard Or High-Security Cylinders. Furnished With 2 Magnetic Keys.	<input type="checkbox"/>
	6302	For Use With "Schlage" Deadbolts. Includes Modified Filler Plate & Collar.	<input type="checkbox"/>
	6305	Combination Of 6300 & BAP. For Use With "Best" Or Other Raised Face Removable Core Cylinders.	<input type="checkbox"/>
	6310	Identical To 6300, Furnished With 3 Magnetic Keys Per Securiguard	<input type="checkbox"/>
	6315	Identical To 6305, Furnished With 3 Magnetic Keys Per Securiguard	<input type="checkbox"/>
	63PP	Securiguard Is Mounted On A Stainless Steel Pull Plate For Use With Exit Device. Contact Factory With Specific Exit Device Name & Model Number For Custom Model.	<input type="checkbox"/>
	63MP	Securiguard Is Mounted On A Stainless Steel Plate For Use With Exit Device Or Other Lock. Contact Factory With Specific Exit Device Name & Model Number For Custom Model.	<input type="checkbox"/>
	64	Change "63" To "64" For A Securiguard With Removable Bay	<input type="checkbox"/>
PARTS & OPTIONS	63BAP	Adapter Plate (Spacer) For Use With Raised Face I/C Cylinders	<input type="checkbox"/>
	63KEY	Additional Key	<input type="checkbox"/>
	63BAY	Replacement Locking Bay With 2 Keys	<input type="checkbox"/>
FINISH	AL	Aluminum	<input type="checkbox"/>
	JB	Jet Black	<input type="checkbox"/>

OPERATION:

The SECURIGUARD™ shield is raised by the magnetic key. The lock key may then be inserted and used.



The shield will remain open until lowered by use of the magnetic key.

KEY LOCK-OUT FUNCTION:

This function is used to lock-out keys and restrict access to the cylinder, in addition to cylinder protection.

Typically, a manager will raise the shield at the start of the day. Regular keys can then be used to operate the lock. At the end of the day, the manager uses the magnetic key to lower the shield.

KEY COMBINATIONS:

SECURIGUARD™ is available keyed different or keyed alike to a new or existing combination.

AVAILABLE FINISHES:

JB = Jet Black Finish.

AL = Aluminum Finish (clear).

ADDITIONAL KEYS:

SECURIGUARD™ keys can be ordered from the factory to match code numbers.



Keys are stamped with code numbers. Codes may be registered to prevent ordering by unauthorized individuals.

NOTE: SPECIAL CYLINDER CAPS:

Some cylinders use special caps over the face of the cylinder for different finishes. Certain caps add too much to the diameter of the cylinder and need to be removed prior to insertion in the Securiguard. This does not affect the cylinder operation.

APPLICATIONS:

- Areas where cylinders are prone to vandalism
- Areas where cylinders are prone to weather issues
- Doors where dual verification for entry is needed
- Doors needing restricted access

POPULAR MODELS:

- 6300-AL Standard unit with two keys; aluminum
- 6300-JB Standard unit with two keys; jet black
- 6305-AL Standard unit with adapter plate for use with "Best" or other raised face removable core cylinders; aluminum
- 6305-JB Standard unit with adapter plate for use with "Best" or other raised face removable core cylinders; jet black



MP POLICE LOCK™

Surface Applied Multi-Point Locking Systems



Maximum Protection Against Break-Ins

- Bolts the door to the frame at up to 4 independent locations
- Easy operation: One turn of the key or interior knob projects or retracts all of the bolts simultaneously
- Easy installation on any solid door
- 4" laminated steel bolts on inswing models project into steel strike brackets mounted on the frame
- 5" long, 5/8 diameter stainless steel deadbolts on outswing doors bolt into the frame
- Dustproof strike provided for rounded lower bolt on all 5-point models

Benefits of Multi-Point Locking

The typical break-in occurs when a burglar tries to pry the door from the frame at the lock area. Multi-point locking defeats this method by protecting the door like a bank vault. Use this retrofit or new construction solution on stock rooms, computer rooms, safe rooms, utility closets, firearms storage rooms, remote buildings and other non emergency doors.

Bolt Type

	<p>Inswing Doors; Square Deadbolts (A)</p> <p>Square laminated deadbolts project into strike brackets mounted on the frame.</p>		<p>Outswing Doors; Round Deadbolts (B)</p> <p>Rounded deadbolts project into holes drilled into the frame.</p>
--	--	--	---

Interior Options

<p>Thumbturn (TT) Standard diamond-shaped turnpiece</p>	<p>Elongated Turnpiece (LT) Easier-to-grasp longer turnpiece</p>	<p>Keyed Cylinder (CO) Interior keyed operation</p>
--	---	--

Exterior Options & Guard plate

<p>HARDGUARD (HG)</p>	<p>BESTGUARD (BG)</p>	<p>SECURIGUARD (SG)</p>	<p>DUST GUARD (DG)</p>	<p>SECURIGUARD Removable Bay (SR)</p>	<p>Thumb Guard (TG)</p>
------------------------------	------------------------------	--------------------------------	-------------------------------	--	--------------------------------




MP POLICE LOCK Model Builder


54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

1	LOCKING POINTS	4840 4-Point (2 Vertical, 2 Horizontal) 4822 2-Point (2 Vertical) 4820 2-Point (2 Horizontal)	
	BOLT TYPE	A Inswing Doors; Square Deadbolts B Outswing Doors; Round Deadbolts	<input type="checkbox"/>
	INTERIOR OPERATOR	TT Thumbturn LT Elongated Thumbturn CO Keyed Cylinder (Cylinder Included)	
2	EXTERIOR OPERATOR	XX No Exterior Operation HG Hardguard BG Bestguard (Small Format IC core) SG Securiguard DG Dust Guard SR Securiguard With Removable Bay TG Thumb Guard	<input type="checkbox"/>
	SIZE	27 For Doors Up To 24" Wide & 84" Tall 28 For Doors Up To 24" Wide & 96" Tall 37 For Doors Up To 36" Wide & 84" Tall 38 For Doors Up To 36" Wide & 96" Tall 47 For Doors Up To 48" Wide & 84" Tall 48 For Doors Up To 48" Wide & 96" Tall	<input type="checkbox"/>


CUSTOM PARTS & ACCESSORIES	MPK-EK6	6" Extension Rods
	MPK-EK12	12" Extension Rods
	MPK-EK24	24" Extension Rods
	MPK-SP8	Set Of 4 Thick & Thin Shims
	MPK-SB	Strike Bracket
	MPK-TD	Thick Door Kit
	MPK-IN	Door Status Indicator
	MPK-MS	Bolt Monitor Switch (Unavailable on 4840)
	MPK-TB2	Set Of 2 Thru-Bolted Anti-Pry Plates
	MPK-TB3	Set Of 3 Thru-Bolted Anti-Pry Plates
MPK-TB4	Set Of 4 Thru-Bolted Anti-Pry Plates	

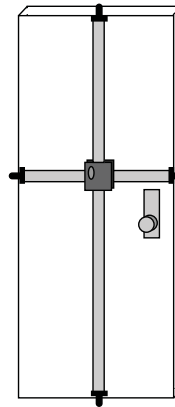

4840

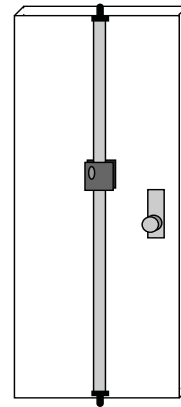

4822

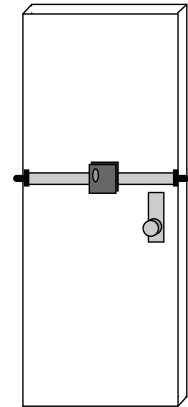

4820

ENTER MODEL CODE

EXAMPLE: 4840A-TTHG-37

1 2 3


*Please note that some of the fields are optional and you may not use them all.

Contact factory for more options.

Maximum Protection Against Break-Ins


Inventory Rooms
Computer Rooms
Remote Buildings (e.g. Cell Towers, Park & Recreation Equipment Sheds)
Non Emergency Perimeter Doors
Safe Rooms
Utility Closets
Firearm Storage Rooms
Dangerous Chemical Storage Rooms

4840B-TTHG-37




4-Point auxiliary lock for outswinging (round deadbolts) doors up to 36" wide & 84" tall with a thumbturn and Hardguard.

4840A-TTHG-37




4-Point auxiliary lock for inswinging (square deadbolts) doors up to 36" wide & 84" tall with a thumbturn and Hardguard.

4840B-TTBG-37




4-Point auxiliary lock for outswinging (round deadbolts) doors up to 36" wide & 84" tall with a thumbturn and Bestguard.

4840A-TTBG-37



4-Point auxiliary lock for inswinging (square deadbolts) doors up to 36" wide & 84" tall with a thumbturn and Bestguard.


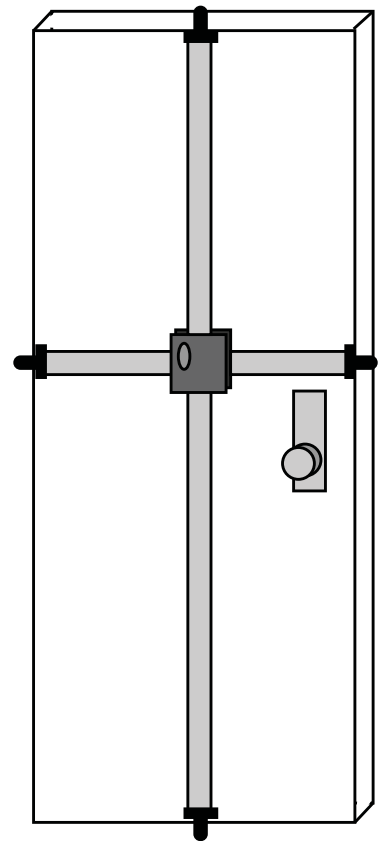




SERPENTS™

The Exit Locking System Which Deadbolts Both Sides Of The Door

Code-Compliant Single-Motion Exiting

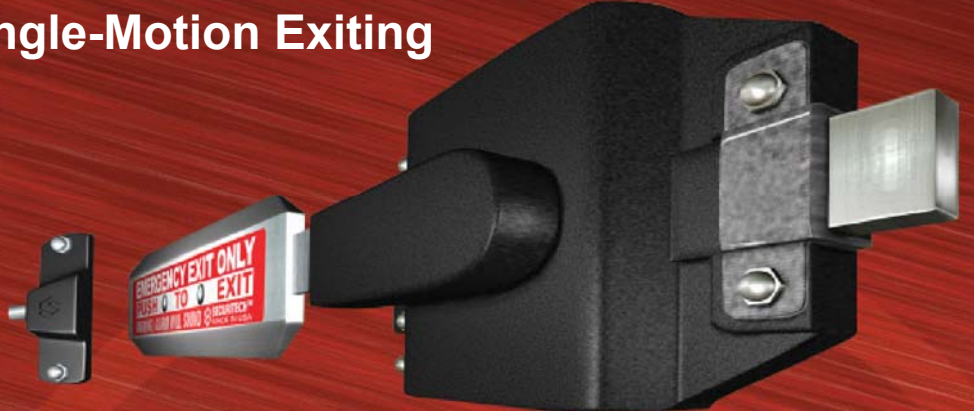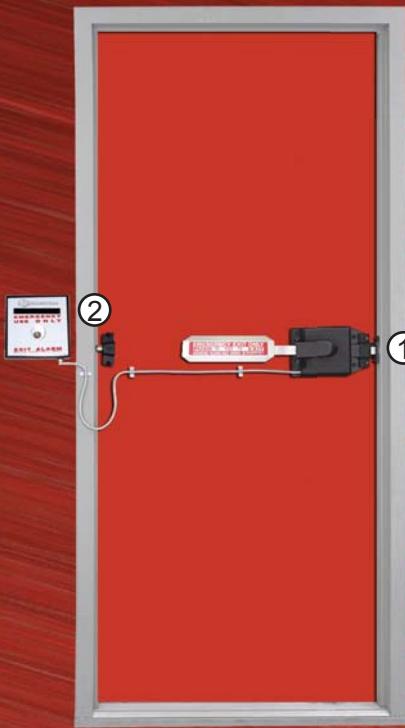

- 2-Point Deadbolt Locking
Not a latch
- Oversize Stainless Steel Deadbolt
1" Throw
- Easy Installation
Full-size steel marking template
- Exterior Stainless Steel Anti-Pry Plate
Protection against attack
- Thru-Bolt Installation
Added resistance to prying
- Wall-Mounted Alarm Option
Protected against weather & delivery carts
- Full Range of Alarm & Entry Options
 - Battery, Direct Power, Signal Output, Keyed Entry, Access Control

Glass Door Kit (SEL-GK2)



Mounting kit for storefront glass doors, Designed for aluminum doors 34" or 36" wide. Plate mounts across the narrow stile aluminum door and is thru-bolted to allow installation.

Double Door Kit (SEL-IAL)



For double door protection, upgrade to a SEL-IAL. The SEL-IAL locks the inactive leaf of a double door configuration. It combines a key activated 2-point vertical bolt lock and double door strike kit (SEL-DDA)

ELEMENTS



DESCRIPTIONS

A10 Keyed battery alarm with 9 Volt battery, twin piezo sirens & low battery alert.	A20 Combines SEL-A10 and hardwired direct power supply	SSO Signal switch only. Provides dry contact for use by others.	CT Digital Counter; add designation after model number. Alarm models only.	PT1 Direct power plug-in transformer upgrade kit for use with A10	MTT Cylinder & Thumbturn for use with SEL-100 models. Not used with SEL-GK2.	KLT Cylinder & Lever for use with SEL-200 models. Not used with SEL-GK2.
---	--	---	--	---	--	--



SERPENT™ Model Builder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

MODELS	SEL-100	Manual Locking; Without Alarm
	SEL-110	Manual Locking; Includes SEL-A10 Battery Alarm
	SEL-120	Manual Locking; Includes SEL-A20 Direct Power Alarm
	SEL-200	Self-Relocking; Without Alarm
	SEL-210	Self-Relocking; Includes SEL-A10 Battery Alarm
	SEL-220	Self-Relocking; Includes SEL-A20 Direct Power Alarm
PARTS & OPTIONS	SEL-GK2	Glass Door Kit; For Aluminum Doors 34" Or 36" Wide
	SEL-IAL	Key-Activated 2-Point Vertical Bolt Lock For Inactive Leaf & Double Door Strike Kit
	SEL-DDA	Double Door Strike For Doors Not Using SEL-IAL
	SEL-A10	Keyed Battery Alarm With 9 Volt Battery
	SEL-A20	Hardwired Direct Power Alarm
	SEL-SSO	Signal Switch Only With Cable
	SEL-AM1	Battery Alarm; Armored Cable; Integral Key Switch; Door Monitor Switch
	SEL-AM2	Direct Power Alarm; Armored Cable; Integral Key Switch; Door Monitor Switch
	SEL-PS2	Direct Power Supply For Use With A20
	SEL-PT1	Direct Power Plug-In
	SEL-MTT	Cylinder & Thumbturn; For Both Series
	SEL-MDT	Cylinder & Thumbturn; For Both Series; Electric, 24vDC Required
	SEL-KLT	Mechanical Lever Trim; For SEL-200 Models (Specify handing)
	SEL-KDT	Electric Lever Trim; For SEL-200 Models; Electric, 24vDC Required (specify handing)
	-CT	Digital Counter (add designation after model number) Alarm models only.
-CW	Concealed Wire From Switch Into Door (8' Leads)	

Deadbolt Protection Against Break-Ins

Solid deadbolt assembly

Protection Against Hinge-Side Attack

Deadbolt provided to resist hinge-removal break-in

Superior Anti-Pry Installation

Thru-bolting & anti-pry plate are standard

Customizable To Meet Security & Operational Needs

Wide range of available alarms & options

Use On Steel, Wood Or Aluminum Doors

Special kit for mounting on glass doors

Easy Installation Without Special Kits

Lock fits all width doors with no special kits needed

Alarms Resist Damage By Moving Carts, Etc.

Wall-mounted alarms ideal for high delivery areas
Keeps sound inside where needed

Battery Alarms May Be Added Or Upgraded As Needed

Direct power upgrade kit available

Modular Configurations

Choose exterior option which meets your needs
(may not be available for glass doors)

Rugged Design, Ideal For Back-Of-House Doors

Stamped steel, not die cast, lock housing

APPLICATIONS:

Emergency Exit Doors

Receiving Doors

Emergency Exit Glass Doors (SEL-GK2 kit)

Doors Leading To Fire Corridors

POPULAR MODELS & KITS:

SEL-100 Manual locking model; no alarm
SEL-110 Manual locking model; with battery alarm (SEL-A10)

SEL-200 Self-relocking model; no alarm
SEL-210 Self-relocking model; with battery alarm (SEL-A10)

SEL-GK2 Glass door kit; for aluminum doors 34" or 36" wide



MULTI-BOLT™

Multiple-Point Locksets



* Door not to scale

Full Function Multi-Point Locking Mortise Lock & Exit Device

Latch lock by day, multi-point protection at night

Aesthetically pleasing with the vertical bolts concealed within the door

Superior protection against break-ins in a single device

5" long, 5/8" diameter stainless steel vertical deadbolts with 1" projection

One action locks or unlocks all the deadbolts simultaneously

Meets ADA and local code requirements for single motion exiting

Lock body fits into standard ANSI mortise lock preparation

Accepts 1 1/4" length mortise cylinder (standard and high-security)

Wide variety of standard and custom functions to meet specific locking requirements

Exterior lever contains vandal-resistant slip clutch

How Does It Work?

Multi-point mortise locks provide safety & security in one lockset. The traditional lock operation (key thumb turn or lever retraction) operates all the deadbolts simultaneously. The wide variety of available functions meet almost any need.

Securitech's TOUGHBAR™



Stainless Steel Device - *Heavy gauge touch bar*

Integrated, Retractable Ends - *No protrusions when device is used*

Full-Length Actuator Bar - *Rugged anti-vandalism design*

Downward Movement - *Designed for switch activation*

Interior Trim Options



Exterior Trim Options



HOVE Module



HOVE module deadbolt projects horizontally into the frame, not the floor. Prevents deadbolt jamming due to dirt and debris at the floor strike.

Stationary Bullet Bolt

Steel stationary bolt adds fourth point to the hinge side of the door.

As the door closes the bolt engages with the frame. It is not connected to the lock body.





MULTI-BOLT Popular Models

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

Single-Motion Retraction Of All Bolts & Latches By Lever Or Panic Bar

Safe Rooms
Utility Closets
Dangerous Chemical Storage Rooms

7XX2 - F18		2-POINT	7PX2 - F18	
7XX 2 F18	Interior Blank; Exterior Blank 2-Point Vertical Bolts Only Cylinder on interior Side Throws/ Retracts Deadbolts		7PX 2 F18	Interior Pull Handle; Exterior Blank 2-Point Vertical Bolts Only Cylinder on interior Pullhandle Throws Deadbolts
Also Available	F17: Turnpiece & Cylinder F16: Cylinder on both sides		Also Available	F17: Turnpiece & Cylinder F16: Cylinder on both sides
7LL4-F13		4-POINT	7TL4HL-03-E29-IT	
7LL 4 F13	Interior Lever; Exterior Lever With Cylinder 4-Point Latch, Deadbolt & Vertical Deadbolts Entrance Function Interior Turnpiece Throws Deadbolts		7TL 4 HL 03 E29 IT	Interior Toughbar; Exterior Lever 4-Point Latch, Deadbolt & Vertical Deadbolts Lower HOVE Module Key Retracts/Projects Latch & Bolts Request-To-Exit; Bolt Position Switch Interior Turnpiece Throws Deadbolts
7LL4-F07M		4-POINT	7TC4HL-09-E29-IT*	
7LL 4 F07M	Interior Lever; Exterior Lever Is Rigid With Cylinder 4-Point Latch, Deadbolt & Vertical Deadbolts Storeroom Function Interior Turnpiece Throws Deadbolts		7TC 4 HL 09 E29 IT	Interior Toughbar; Exterior Control Trim 4-Point Latch, Deadbolt & Vertical Deadbolts Lower HOVE Module Key Momentarily Unlocks Lever Request-To-Exit; Bolt Position Switch Interior Turnpiece Throws Deadbolts
7LP4-F07M		4-POINT	7TP4HL-03-E29-IT	
7LP 4 F07M	Interior Lever; Exterior Pull Handle With Cylinder 4-Point Latch, Deadbolt & Vertical Deadbolts Storeroom Function Interior Turnpiece throws deadbolts		7TP 4 HL 03 E29 IT	Interior Toughbar; Exterior Pull Handle 4-Point Latch, Deadbolt & Vertical Deadbolts Lower HOVE Module Key Retracts Latch Request-To-Exit; Bolt Position Switch Interior Turnpiece Throws Deadbolts
7TX4HL-01-E29-IC		4-POINT	7TC4HL-08-E29-IT*	
7TX 4 HL 01 E29 IC	Interior Toughbar; Exterior None, No Entry 4-Point Latch, Deadbolt & Vertical Deadbolts Lower HOVE Module Exit Only Request-To-Exit; Bolt Position Switch Interior Cylinder Throws Deadbolts		7TC 4 HL 08 E29 IT	Interior Toughbar; Exterior Control Trim 4-Point Latch, Deadbolt & Vertical Deadbolts Lower HOVE Module Keyed Classroom Function Request-To-Exit; Bolt Position Switch Interior Turnpiece Throws Deadbolts

*Deadbolts cannot be thrown from the exterior side of the door on 7TC models.

Contact factory for additional models.



AUTO-BOLT™

Safety & Security Combined In One Lock

Instant Deadbolt Protection Each Time The Door Closes



Choose from single-point or 4-point models

Trigger activated automatic deadbolt locking

Heavy Duty Stainless Steel Deadbolts project one full inch in each direction

Optional multi-point feature bolts the door to the frame at up to 4 independent locations

Interior lever or UL listed panic bar

Can be rated for use on fire-rated doors up to 4' wide and 8' tall

Easy exiting: Interior lever or panic bar retracts all bolts simultaneously

Easy installation on hollow metal doors

Wide variety of exterior trim functions, including key-released lever trim, electric release and keyed pull handles

5" long, 5/8" diameter steel vertical deadbolts with a 1" throw

Dustproof strike provided for rounded lower bolt on multi-point models

How Does It Work?

Auto-Bolt locksets are trigger activated. When the trigger hits the strike, up to three stainless steel deadbolts project into the frame. Life-safety is provided for, as a single motion retracts all the deadbolts for easy exiting.

Securitech's TOUGHBAR™



Stainless Steel Device - *Heavy gauge touchbar*

Integrated, Retractable Ends - *No protrusions when device is used*

Full-Length Actuator Bar - *Rugged anti-vandalism design*

Downward Movement - *Designed for switch activation*

Storeroom Function Lever (44)

Rotating the key unlocks the lever temporarily. Removing the key relocks the lever.

Storeroom Function with Electric Release (46)

Same as Storeroom Function Lever with access control ability. Uses a 24vDC electric release.

Classroom Function Lever (45)

Rotating the key clockwise unlocks the lever until the key is reinserted and rotated counter clockwise.

AUTO-BOLT Popular Models


54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

Automatic Deadbolt Protection Every Time The Door Closes

Emergency Exit Doors
 Storage Rooms
 Counting Rooms
 Utility Rooms
 Security Closets
 Safe Rooms

81T11-XX-630			1-POINT	81L44-G1-CVR-630	
81 T 11 X 630	Single Point (main deadbolt) Toughbar™ Exit Only No Trim Satin Stainless Steel Finish			81 L 44 G1 CVR 630	Single Point (main deadbolt) Lever Storeroom Lever Trim GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish
84T11-XX-HVL-630			4-POINT	84L44-G1-CVR-630	
84 T 11 X HVL 630	4-Point (main, top, bottom & fixed bolts) Toughbar™ Exit Only No Trim Concealed Vertical Rod - Lower Bolt Horizontal Module Satin Stainless Steel Finish			84 L 44 G1 CVR 630	4-Point (main, top, bottom & fixed bolts) Lever Storeroom Lever Trim GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish
84T44-G1-CVR-630			4-POINT	84L45-G1-CVR-630	
84 T 44 G1 CVR 630	4-Point (main, top, bottom & fixed bolts) Toughbar™ Storeroom Lever Trim GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish			84 L 45 G1 CVR 630	4-Point (main, top, bottom & fixed bolts) Lever Classroom Lever Trim GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish
84T45-G1-CVR-630			4-POINT	84L46-G1-CVR-630	
84 T 45 G1 CVR 630	4-Point (main, top, bottom & fixed bolts) Toughbar™ Classroom Lever Trim GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish			84 L 46 G1 CVR 630	4-Point (main, top, bottom & fixed bolts) Lever Storeroom Lever Trim; DC Electric Release GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish
81T46-G1-CVR-630			1-POINT	81L46-G1-CVR-630	
81 T 46 G1 CVR 630	Single Point (main deadbolt) Toughbar™ Storeroom Lever Trim; DC Electric Release GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish			81 L 46 G1 CVR 630	Single Point (main deadbolt) Lever Storeroom Lever Trim; DC Electric Release GG Style Trim; Standard Lever With Return Concealed Vertical Rod Satin Stainless Steel Finish

Contact factory for additional models.



PRICE BOOK 2015

PRICING

Pricing & Policies

Pricing, Policies & Warranty

Pricing Policies.....P1.1

ELECTRIC LOCKING

Control Trim Solutions

Retrofit Control Trim For Panic Devices

LEXI.....P1.3

Mortise & Cylindrical Control Trim Packages

ELECTRA.....P1.9

Exit Device & Control Trim Packages

ACCED.....P1.12

Power Supplies, Electric Transfers & Wiring

POWER.....P1.15

Mantraps, Sally Ports, Interlocks, Secured Wards & Other
Entry & Exit Control Systems

RACHIE.....P1.17

Advanced Request-To-Exit Trim

ARTE.....P1.19

MECHANICAL LOCKING









Forced Entry Solutions

Cylinder Protection

Securiguard(6000).....P1.21

Multi-Point Secondary Locks (Surface Applied, Non Emergency)

MPPoliceLock(4800).....P1.22



Please Visit

www.securitech.com/registration

To Register Your Price Book

toll free 800.622.LOCK
local 718.392.9000
fax 718.392.8944

SECURITECH GROUP, INC.
54-60 46th St., Maspeth, NY 11378
www.securitech.com

Securitech's policy is to work cooperatively with our distributors and dealers to exceed the needs and requirements of our users.

ACCEPTANCE

Orders are accepted at the sole discretion of Securitech Group, Inc. Securitech reserves the right to decline an order at its sole discretion.

AUTHORIZATION TO PURCHASE

Knowledge or possession of the price list does not constitute the right to purchase from Securitech.

CHANGES & CANCELLATIONS

All changes to an order must be in writing. Changes and cancellations are subjected to material and labor charges incurred prior to the change or cancellation notification and shall be due and payable upon billing by Securitech.

CLAIMS

All claims for shortages must be made within one week of receipt of material. Any claims for shortages or damages by the carrier shall be made directly by the customer to the carrier. Any change or alteration to an invoice must be approved by Securitech in advance of payment.

CONFIRMATION

To ensure accuracy, Securitech requires a signed Order Entry Confirmation prior to releasing an order to production. Failure to provide Securitech with a confirmation will delay the order.

CREDIT TERMS

Securitech retains the right to issue or change credit terms at its sole discretion.

DELIVERY

Securitech will provide an estimated delivery date. Securitech shall not be held liable or accountable for any damages or costs incurred due to missed or changed delivery date.

FINANCE CHARGES

Securitech retains the right to issue finance charges of 1.5% per month on all delinquent accounts. The customer shall be responsible for all collection costs, court costs and attorney's fees (where allowed by law) in connection with the recovery of any delinquent account.

FREIGHT

F.O.B. Maspeth, NY. Customer is responsible for all freight costs. Securitech will ship with the carrier of its choice, unless instructed otherwise. Freight is not included in rush charge.

MINIMUM INVOICE AMOUNT

Securitech retains the right to determine the minimum invoice amount for any account.

LEGAL

All transactions shall be governed by the laws of the State of New York.

PRICES

Prices are subject to change without notice and are only guaranteed when presented by Securitech by a quotation and subject to the dates listed in the quotation. Securitech reserves the right to correct any printed or clerical errors at any time.

RETURNS

All returns shall require pre-authorization by Securitech and the issuance of an RGA number. All returns must comply with the terms and requirements listed on the RGA and are subject to review and acceptance upon receipt by Securitech. Returns are subject to a restocking fee as determined by Securitech and are issued at the sole discretion of Securitech.

TAXES

Securitech sales are to authorized resellers who shall furnish applicable sales certificates to Securitech. All prices exclude any federal, state or local taxes.

TERMS OF SALE

Securitech terms for open status accounts are Net 30 days. Discounts are offered at the sole discretion of Securitech and are listed individually upon the invoice.

Securitech Group, Inc. Rush Order Policy (Effective 10/07)

We try very hard accommodate all our customers and honor requested ship dates. We understand that there will be circumstances requiring "Rush" orders and will make good faith efforts to honor those requests, according to the policy below. However, it is impossible for Securitech to honor each and every rush order request. Dealers should maintain an inventory of the most popular items they sell.

Rush charges are necessary as greater effort and expenses are incurred to fulfill rush shipments. Rush orders also impact our ability to make on-time shipments. Customers will be informed of rush charges before they are entered on the order. Customers must accept the rush charge before the order can be processed.

Rush orders will be accepted until 2pm EST (3pm EST for west coast customers). Any orders received after that time cannot be processed on the same day. Rush charges may be waived at the discretion of management and will be indicated in writing on the purchase order confirmation.

Rush Charge Schedule:

- Standard: 10% - shipped within 48 hours after receipt of a confirmed order.
- Extreme: 15% -shipped within 24 hours of a confirmed order, requires telephone request as well.

FREIGHT IS NOT INCLUDED IN RUSH CHARGE

Under normal circumstances the following products can ship with RUSH status. Quantity may affect availability

All products must be of standard finish, size and have no custom mechanical or electric components.

1. SERPENT Complete Products: SEL-100, 200, 110, 210,120, 220, SEL-IAL, SEL-DDA, SEL-481/482, SEL-GK2
 - a. Exterior Trim: SEL-KLT, SEL-MTT, SEL-KDT, SEL-MDT
 - b. Alarms: SEL-A10, SEL-A20
 - c. Spare Parts: SEL-SSO,
2. 4800 Complete Products: 4820, 4820V, 4840, 4840P, 4831,4832,4833 (In swing or out swing)
 - a. Exterior Control: XX, HG, BG
 - b. Internal Control: All options (TT, LT, CO, RO)
 - c. Standard Door width, height and thickness ("37")
 - d. Spare Parts: MPK-EK12, 4840MECH, 48TPC-ASM
3. SECURIGUARD Models 6300, 6305

The following products are not available under the above rush program: 7000 Series, 8000 Series, any SHD, any SBD, any TT, special finishes, LEXI, ACCED, ELECTRA, RACHIE, ARTE, CUSTOM ELECTRICAL AND/OR MECHANICAL PRODUCTS.

Please contact the factory for lead times.

This policy is subject to change without notice.

Limited Warranty

The Securitech Group, Inc (The Company) warrants that its products sold are free from defects in workmanship and materials under normal use and service.

This warranty does not cover damage or defects arising from improper installation, improper storage, abuse, or products being used in application other than in a manner which product was intended.

The only liability of the Company in tort or contract whether under warranty or otherwise shall be limited to the repair or replacement of any product or component part which shall prove defective as covered by this warranty.

Electric Locks & Trims

- UG Trims:** (2) Two Year Mechanical Warranty
(5) Five Year Warranty on electrical components
- GG Trims:** (2) Two Year Mechanical Warranty
(5) Five Year Warranty on electrical components

Power Transfer Hinges, TransX, Yamaka, Mini Hinge:

- (1) One Year Warranty

Power Supplies, Alarms, Key Switches, other products:

- (1) One Year Warranty

Multi-Point & Mechanical Locks

- Serpent: [5] Five Year Mechanical & [1] One Year Electrical Warranty
- 4800 Series: (3) Three Year Mechanical Warranty
- 6000 Series: (1) One Year Mechanical Warranty
- 7000 Series: (1) One Year Mechanical Warranty
- 8000 Series: (1) One Year Mechanical Warranty

Glossary of Terms

Classroom Function: Lever remains unlocked until re-locked by key

Storeroom Function: Single entry, lever relocks when key is removed

Fail-Secure: Lever remains locked with loss of power

Fail-Safe: For re-entry applications; lever unlocks with loss of power

Request-To-Exit: Moving interior lever or pushing panic bar sends signal for exiting. Eliminates need for P-I-R switches or other detectors.

Key Usage Switch: Single rotation of the key changes state of switch from off to on or on to off

Momentary Switch: State of switch changes only as long as key is rotated

Latch Position Switch: Indicates that latch is fully extended

Key On/Off Switch: A switch performs a function when activated by rotating the key.

Bond Sensor: Verifies bonding between magnet and armature on magnetic locks.


Door Status Switch: Senses open and closed door position.

Finishes

B. H. M. A.	Description
630	Satin Stainless Steel
605	Bright Brass
606	Satin Brass
611	Bright Bronze
612	Satin Bronze
613	Oil Rubbed Bronze
625	Bright Chrome
626	Satin Chrome
629	Bright Stainless
676	Powder Coated Black

Handing

The door handing is determined by looking at the door from the exterior (key) side of the door.



Look at the hinges.


See if the door swings into the room or out of the room.

LEXI™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

RETROFIT CONTROL TRIM FOR EXISTING EXIT DEVICES

Below is pricing for Securitech's popular LEXI models.
 To price other custom models start with the series as the base price.
 Add the appropriate prices for each designation.
 The total is the model's list price.



LEXI POPULAR MODEL PRICES (Specify handing.)

MODELS (page E2.2)		LIST PRICE
EDT-G20-D11-J2F1-630	24vDC Release For Jackson Concealed Vertical Rod Exit Devices (CVR-885, 1085, 1285, 2085); Single Entry, Fail-Secure	\$855
EDT-G20-D13-J2F1-630	24vDC Release For Jackson Concealed Vertical Rod Exit Devices (CVR-885, 1085, 1285, 2085); Single Entry, Fail-Secure, Key Usage Switch	\$1035
EDT-G20-D11-D4G2-630	24vDC Release For Doromatic Concealed Vertical Rod Exit Devices (CVR-1690, 990); Single Entry, Fail-Secure	\$855
EDT-G20-D13-D4G2-630	24vDC Release For Doromatic Concealed Vertical Rod Exit Devices (CVR-1690, 990); Single Entry, Fail-Secure, Key Usage Switch	\$1035
EDT-G20-D11-V1A1-630	24vDC Release For Von Duprin Rim Exit Devices (RIM-99EO, 99NL(cyl), 99TP, 99K, 9927EO, 9927NL(cyl), 9927L, 9927K, 9947EO, 9947NL(cyl), 9947L); Single Entry, Fail-Secure	\$820
EDT-G20-D13-V1A1-630	24vDC Release For Von Duprin Rim Exit Devices (RIM-99EO, 99NL(cyl), 99TP, 99K, 9927EO, 9927NL(cyl), 9927L, 9927K, 9947EO, 9947NL(cyl), 9947L); Single Entry, Fail-Secure, Key Usage Switch	\$1000
EDT-G20-D11-Y1A1-630	24vDC Release For Yale & Corbin Russwin Exit Devices (Yale: SVR-7110, SQB-7150n, CVR-7140n, RIM-7200w, CVR-7240; Corbin Russwin: RIM-ED5200n, SVR-ED5400n, CVR-ED5800n, RIM-ED4200, SVR-ED4400, SVR-ED4800, RIM-ED6200, SVR-6400EO, CVR-ED6800EO); Single Entry, Fail-Secure	\$785
EDT-G20-D13-Y1A1-630	24vDC Release For Yale & Corbin Russwin Exit Devices (Yale: SVR-7110, SQB-7150n, CVR-7140n, RIM-7200w, CVR-7240; Corbin Russwin: RIM-ED5200n, SVR-ED5400n, CVR-ED5800n, RIM-ED4200, SVR-ED4400, SVR-ED4800, RIM-ED6200, SVR-6400EO, CVR-ED6800EO); Single Entry, Fail-Secure, Key Usage Switch	\$965

LEXI PRICE LIST

SERIES	DESCRIPTION	LIST PRICE
EDT	Exit Device Trim	710
EMT	Exit Device Trim, Maglock Built In Trim	865

TRIM STYLE	DESCRIPTION	ADD TO LIST PRICE
G2	GG Style Trim; Durable, Slip Clutch Model (vandal-resistant)	-

LEVER TYPE	DESCRIPTION	ADD TO LIST PRICE
0	Standard With Return	-
2	Tapered	42
3	Tubular With Return	42
4	Tapered With Return	42

CONTINUED ON NEXT PAGE

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

LEXI™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

FUNCTION GROUPS	DESCRIPTION	ADD TO LIST PRICE
D11	24vDC Release, Single Entry, Fail-Secure	-
D13	24vDC Release, Key Usage Switch	180
D15	24vDC Release, Key On/Off Switch	125
D31	24vDC Release, Classroom Function	57
R11	Re-Entry Function, 24vDC Required, Fail-Safe	57
R13	Re-Entry Function, Key Usage Switch	237
A11	24vAC (30VA) Release, Single Entry, Fail-Secure	-
A13	24vAC (30VA) Release, Key Usage Switch	180
M10	Mechanical, Single Entry	-120
M30	Mechanical, Classroom Function	-80
M00	Mechanical, Dummy Trim	-145
M02	Passage	-170
MP&O	DESCRIPTION	ADD TO LIST PRICE
D4G2	Doromatic, CVR-1690, 990	145
D6G2	Doromatic, CVR-3700	145
J2F1	Jackson, CVR-885, 1085, 1285, 2085	145
K1E1B	Kawneer, CVR-Paneline (wide stile only)	265
V1A1	Von Duprin, Rim-99EO, 99NL(cyl), 99TP, 99K, 9927EO NL(cyl), 9927L, 9927K, 9947EO, 9947NL(cyl), 9947L	110
Y1A1	Yale, VR7110, SQB7150(n), CVR7140(n), Rim7200(w), CVR7240, Rim-ED5200(n), SVR-ED5400(n), CVR-ED5800(n), Rim-ED4200, SVR-ED4400, SVR-ED4800, Rim-ED6200, SVR-ED6400(EO), CVR-ED6800(EO)	75
Y3A	Yale, Rim7100(w), SQB7150(w), SVR7110(w), CVR7140(w)	110
OTHER MP&O MODELS		ADD TO LIST PRICE
LEVEL I	(Includes Mounting Plate For Dummy Trim)	75
LEVEL II		110
LEVEL III		145
LEVEL IV		165
LEVEL V		235
LEVEL VI		265
SPECIAL FUNCTIONS	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (List As Needed)		
F1	Lever Position Switch	165
F3	Thick Door (2-2 1/2)	40
F4	LED Lever Release Indicator	290
F5	Security Fasteners	35
F6	Piezo Sounder For Lever	75
FINISH	DESCRIPTION	ADD TO LIST PRICE
630	Satin Stainless Steel	-
605	Bright Brass	210
606	Satin Brass	130
613	Oil Rubbed Bronze -Powder Coated-	130
629	Polished Stainless Steel	210
DOOR HANDING	DESCRIPTION	ADD TO LIST PRICE
LHR	Left Hand Reverse Door	
RHR	Right Hand Reverse Door	

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

LEXI™ MP&O Finder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

FIND YOUR EXIT DEVICE MODEL NUMBER. FIND THE CORRESPONDING MP&O. PLACE THE MP&O DESIGNATION INTO FIELD #4 ON THE LEXI MODEL BUILDER PAGE.

Von Duprin Exit Devices

MODEL	TYPE	DEVICE	EXTERIOR	OPERATOR	MP&O	LEVEL
22	RIM	22NL	N/A	N/A	U1A1	II
33	RIM	33EO	Contact Securitech For More Information On 33 Series Surface and Rim Devices			
33	RIM	33NL-OP				
33	RIM	33L				
3327	SVR	3327L				
3347	CVR	3347L				
3347	CVR	3347TL	THUMBTURN	376T	V13D6*	IV
33A	RIM	33AEO	NONE	N/A	V10A4	II
33A	RIM	33ANL	CYLINDER	386NL	V10A4	II
33A	RIM	33AL	LEVER TRIM	360L	V10A4	II
3327A	SVR	3327A	LEVER TRIM		V10A4	II
33A47	CVR	33A47EO	NONE	N/A	V10A4	II
33A47	CVR	33A47NL	CYLINDER	386NL	V10A4	II
33A47	CVR	33A47L	LEVER TRIM	360L	V10A4	II
33A47	CVR	33A47TL	THUMBTURN	376T	V13D6*	IV
5547	CVR	5547TL	THUMBTURN	376T	V13D6*	IV
55	RIM	55NL	LEVER TRIM	5575NL	V18A1	IV
88	RIM	88NL	CYLINDER	880NL	V2A1	II
88	RIM	88TP	THUMB PIECE	880TP	V15A1**	IV
88	RIM	88L	LEVER TRIM	373L	V20B4	II
88	RIM	88K	KNOB	880K	V2B1	III
8875	MORTISE	8875L	LEVER TRIM	373L	V7B1	II
8827	SVR	8827TP	THUMB PIECE	880TP	V11D9***	IV
8827	SVR	8827L	LEVER TRIM	373L	V12B4	II
8847	CVR	8847EO	NONE	N/A	V13D6*	IV
8847	CVR	8847TL	THUMBTURN	377T	V13D6*	IV
99	RIM	99EO	NONE	N/A	V1A1	II
99	RIM	99NL	CYLINDER/PLATE	990NL	V4A1	II
99	RIM	99NL	CYLINDER ONLY	110NL	V1A1	II
99	RIM	99TP	THUMB PIECE	990TP	V1A1	II
99	RIM	99K	KNOB	991K	V1A1	II
9975	MORTISE	9975L	LEVER TRIM	992L	V14B8	III
9975	MORTISE	9975K	KNOB	991K	V14B8	III
9927	SVR	9927EO	NONE	N/A	V1A1	II
9927	SVR	9927NL	CYLINDER/PLATE	990NL	V4A1	II
9927	SVR	9927NL	CYLINDER ONLY	110NL	V1A1	II
9927	SVR	9927TP	THUMB PIECE	990TP	V4A1	II
9927	SVR	9927L	LEVER TRIM	992L	V1A1	II
9927	SVR	9927K	KNOB	991K	V1A1	II
9947	CVR	9947EO	NONE	N/A	V1A1	II
9947	CVR	9947NL	CYLINDER/PLATE	990NL	V4A1	II
9947	CVR	9947NL	CYLINDER ONLY	110NL	V1A1	II
9947	CVR	9947L	LEVER TRIM	992L	V1A1	II

* Must use rod member #109112 for MP&O #V13D6

** Requires Von Duprin #CKNL kit to use MP&O #V15A1

Universal Mounting Plates

MP&O	LEVEL	WIDTH	HEIGHT
U1A1	II	2"	13"
U2A1	II	3"	13"
U3D2	II	3"	13"
U4A7	II	2.5"	14.25"
U1D6	III	2"	13"
U1D7	III	2"	13"

Universal Mounting Plates do not match a specific manufacturer's templating and do not thru-bolt to exit devices. They are designed to thru-bolt around the exit device head and can be used with various, but not all exit devices.


All Universal Mounting Plates include 4 thru-bolts except the U3D2 MP&O which comes with 2 thru-bolts.

U1A1 & U2A1 replicate rim cylinder tailpiece

D2 operator used for Monarch 18 CVR

D6 operator used for lifting motion on different CVR devices

D7 operator used for lifting motion on Sargent CVR devices

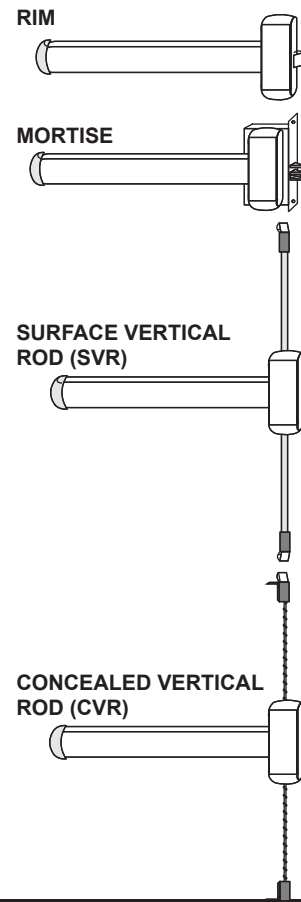

We are constantly adding MP&O's based upon customer requests. If the MP&O for an exit device you need is not listed, please contact the factory and we'll work with you to meet your needs.

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

FIND YOUR EXIT DEVICE MODEL NUMBER. FIND THE CORRESPONDING MP&O. PLACE THE MP&O DESIGNATION INTO FIELD #4 ON THE LEXI MODEL BUILDER PAGE.

ALUMINUM DOOR SOLUTIONS

Jackson Exit Devices

MODEL	TYPE	MP&O	LEVEL
885	CVR	J2F1	III
1085	CVR	J2F1	III
1085	CVR	J6F1*	III
1285	CVR	J2F1	III
2085	CVR	J2F1	III
3185	CVR	J1H2	IV
1095	RIM	J3A4	III
1295	RIM	J4A5	III

*Not available for pair of doors - both active

Kawneer Exit Devices

STILE	TYPE	MP&O	LEVEL
WIDE	CVR	K1E1B**	VI
NARROW	CVR	K2E2**	V

Adams-Rite Exit Devices

MODEL	TYPE	MP&O	LEVEL
8400	MORTISE	A1B3	II
8600-LHR	CVR	A2A8	II
8600-RHR	CVR	A3A8	II
8675-LHR	CVR	A2A8	II
8675-RHR	CVR	A3A8	II

Monarch Exit Devices

MODEL	TYPE	MP&O	LEVEL
17R	RIM	M1D2	II
17M	MORTISE	M1D2	II
18R	RIM	M3B9	II
18SVR	SVR	M2A1**	II
19SVR	SVR	M4A1	II
19 R EO	RIM	M5A1	II

Doromatic Exit Devices

MODEL	TYPE	MP&O	LEVEL
1690	CVR	D4G2	III
990	CVR	D4G2	III
1990	CVR	D10G2	III
1790-RHR	RIM	D6G2	III
1790-LHR	RIM	D6G1	III
3700	RIM	D6G2	III

Detex Exit Devices

MODEL	TYPE	MP&O	LEVEL
V4001	RIM	T1A10	IV

Hager Exit Devices

MODEL	TYPE	MP&O	LEVEL
4500	RIM	H1A7	IV

Corbin/Russwin Exit Devices

MODEL	TYPE	DEVICE	EXTERIOR	MP&O	LEVEL	STILE
ED5000	RIM	ED5200		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED5000	SECURITY	ED5200S		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED5000	MORTISE	ED5600L	LEVER TRIM	Y2B1	II	N/A
ED5000	SVR	ED5400		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED5000	CVR	ED5800		Y1A1 / Y3A1	I / II	NARROW / WIDE
ED4000	RIM	ED4200		Y1A1	I	N/A
ED4000	SVR	ED4400		Y1A1	I	N/A
ED4000	CVR	ED4800		Y1A1	I	N/A
ED6000	RIM	ED6200***	EXIT ONLY	Y1A1	I	N/A
ED6000	RIM	ED6200****	THUMBPIECE	C6L1	III	N/A
ED6000	RIM	ED6200	LEVER TRIM	C6L1	III	N/A
ED6000	RIM	ED6200	KNOB	C6L1	III	N/A
ED6000	SVR	ED6400***	EXIT ONLY	Y1A1	I	N/A
ED6000	SVR	ED6400****	THUMBPIECE	C6L1	III	N/A
ED6000	SVR	ED6400	LEVER TRIM	C5C2*5	III	N/A
ED6000	SVR	ED6400	KNOB	C6L1	III	N/A
ED6000	CVR	ED6800***	EXIT ONLY	Y1A1	I	N/A
ED6000	CVR	ED6800****	THUMBPIECE	C6L1	III	N/A
ED6000	CVR	ED6800	LEVER TRIM	C6L1	III	N/A
ED6000	CVR	ED6800	KNOB	C6L1	III	N/A
ED8000	RIM	ED8200	EXIT ONLY	C3A3	III	N/A
ED8000	RIM	ED8200	LEVER OR KNOB	C3A3	III	N/A
ED8000	SVR	ED8400	EXIT ONLY	C3A3	III	N/A
ED8000	SVR	ED8400	LEVER OR KNOB	C3A3	III	N/A

ED5000 Series

All exits will accept trims.

Function of device is in trim not in the exit head.

The narrow Y1 plate should be used on new construction or doors not yet prepped for Corbin Russwin 700/900 trims.

The Y3 backplate is the same dimensions as the escutcheon for the 700/900 trim by Corbin Russwin. Use on retrofit projects.

ED4000 Series

All narrow-stile exits will accept trims.

Function of device is in trim not in the exit head.

The Y1A1 MP&O bolts directly to the head of the exit device.

ED8000 Series

Trim bolts thru door above and below device as well as once to head of device for alignment

*For retrofit. Covers old exterior trim holes.

**For use with PANELINE 350 Doors

***Requires upgrade cassette in exit device head to accept trim

****The C2 Plate will not cover all old thumbpiece holes

*5 UG Only

**Provide spindle Rotation to Unlock Exit Device

We are constantly adding MP&O's based upon customer requests. If the MP&O for an exit device you need is not listed, please contact the factory and we'll work with you to meet your needs.

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

LEXI™ MP&O Finder

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

FIND YOUR EXIT DEVICE MODEL NUMBER. FIND THE CORRESPONDING MP&O. PLACE THE MP&O DESIGNATION INTO FIELD #4 ON THE LEXI MODEL BUILDER PAGE.

Yale Exit Devices

MODEL	TYPE	EXTERIOR	OPERATOR	MP&O	LEVEL	STILE
7100/7150	RIM	NONE	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	CYLINDER	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	THUMBPIECE	530	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	LEVER TRIM	520/620	Y1A1 / Y3A1	I / II	NARROW / WIDE
7100/7150	RIM	KNOB	CA544	Y3A1	II	N/A
7130	MORTISE	NONE	N/A	Y2B1	II	N/A
7130	MORTISE	LEVER TRIM	520/620	Y2B1	II	N/A
7110	SVR	NONE	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7110	SVR	THUMBPIECE	530	Y1A1 / Y3A1	I / II	NARROW / WIDE
7110	SVR	LEVER TRIM	520/620	Y1A1 / Y3A1	I / II	NARROW / WIDE
7110	SVR	KNOB	CA544	Y3A1	II	N/A
7140	CVR	NONE	N/A	Y1A1 / Y3A1	I / II	NARROW / WIDE
7140	CVR	THUMBPIECE	530	Y1A1 / Y3A1	I / II	NARROW / WIDE
7140	CVR	LEVER TRIM	520/620	Y1A1 / Y3A1	I / II	NARROW / WIDE
7140	CVR	KNOB	CA544	Y3A1	II	N/A
7200	RIM	NONE	N/A	Y1A1	I	N/A
7200	RIM	CYLINDER	501	Y1A1	I	N/A
7200	RIM	THUMBPIECE	T14	Y1A1	I	N/A
7200	RIM	LEVER TRIM	500	Y1A1	I	N/A
7210	SVR	NONE	N/A	Y1A8	I	N/A
7210	SVR	CYLINDER	501	Y1A8	I	N/A
7210	SVR	THUMBPIECE	T14	Y1A8	I	N/A
7210	SVR	LEVER TRIM	500	Y1A8	I	N/A
7240	CVR	NONE	N/A	Y1A1	I	N/A
7240	CVR	CYLINDER	501	Y1A1	I	N/A
7240	CVR	THUMBPIECE	T14	Y1A1	I	N/A
7240	CVR	LEVER TRIM	500	Y1A1	I	N/A

Yale 7100 Series

All exit devices will accept trims. Function of device is in trim not in the exit head.

Y1A1 - The Y1 is a narrow plate and should be used on new construction or doors not yet prepped for Yale wide-stile trims.

Y3A1 - The Y3 is a wide backplate and uses the same dimensions as the escutcheon for the 520/620 lever trims. Use on retrofit projects.

The Y1 plate used with 7100 devices uses 4 thru-bolt studs.

Yale 7200 Series

All narrow stile exits will work with lever trims. Function of device is in trim not in the exit head.

Y1 plate bolts directly to head of 7200 narrow stile exit device in the middle 2 locations.

Sargent Exit Devices

MODEL	TYPE	MP&O	LEVEL
8400	CVR	S1D7	III
8400ET	CVR	S1D8	III
8600	CVR	S1D8	III
8810F	RIM	S2A1	I
8810RD	RIM	S2A1	I
8800R	RIM	S2A1	I
8880R	RIM	S2A1	I
8813	RIM	S2A1	I
8888R	RIM	S6A1	III
8300	MORTISE	S4B2	I
8700	SVR	S4B2	I
8900	MORTISE	S4B2	I
9800	RIM	S4B2	I
9900	MORTISE	S3C1	III
9900	MORTISE	S4B2	I
9700	SVR	S4B2	I

Precision Exit Devices

MODEL	TYPE	MP&O	LEVEL
110	RIM	P1A1	II
110	RIM	P3C1	III
1103R	RIM	P15C3	II
1103R	RIM	P15C3	II
1203	SVR	P1A1	II
200	SVR	P15C1	III
1200	SVR	P1A1	II
1305	MORTISE	P2B1	II
2603	CVR	P8A1	II
2103	RIM	P9A1	III
2208	SVR	P10A1	II
2400	RIM	P13A1	II

*For retrofit. Covers old exterior trim holes.

Dorma Exit Devices

MODEL	TYPE	MP&O	LEVEL
9100	CVR	B1A1	II
5100	CVR	B2A7	II
5300	RIM	B2A7	II
9400	SVR	B1A1	II
9700	RIM	B3A4	II

American Devices

MODEL	TYPE	MP&O	LEVEL
6100-LHR	CVR	A4A1	II
6100-RHR	CVR	A5A1	II

We are constantly adding MP&O's based upon customer requests. If the MP&O for an exit device you need is not listed, please contact the factory and we'll work with you to meet your needs.

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.



 **SECURITECH[®]**

**YOU WANT,
WE DO**

America's Leading Innovative Manufacturer of Code Compliant Door Locking Solutions




Toll Free: 800.622.LOCK - 718.392.9000 - 54-60 46th St., Maspeth, NY 11378 - www.Securitech.com

ELECTRA™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

CONTROL TRIM PACKAGES FOR MORTISE & CYLINDRICAL LOCKS

*Below is pricing for Securitech's popular ELECTRA models.
To price other custom models start with the series as the base price.
Add the appropriate prices for each designation.
The total is the model's list price.*



ELECTRA POPULAR MODEL PRICES (Specify handing.)

MODELS (page E3.2)		LIST PRICE
MLA-G20-D11-630	Fire-Rated "A" Series Mortise Lockset; 24vDC Release, Single Entry, Fail-Secure	\$1105
MLA-G20-D21-630	Fire-Rated "A" Series Mortise Lockset; 24vDC Release, Single Entry, Fail-Secure, Request-To-Exit	\$1182
MLA-G20-D24-630	Fire-Rated "A" Series Mortise Lockset; 24vDC Release, Single Entry, Fail-Secure, Key Usage Switch, Latch Position Switch, Request-To-Exit	\$1485
MLA-G20-R11-630	Fire-Rated "A" Series Mortise Lockset; 24vDC Re-Entry Release, Single Entry, Fail-Safe	\$1162
MLA-G20-R21-630	Fire-Rated "A" Series Mortise Lockset; 24vDC Re-Entry Release, Single Entry, Fail-Safe, Request-To-Exit	\$1240
MLA-G20-R24-630	Fire-Rated "A" Series Mortise Lockset; 24vDC Re-Entry Release, Single Entry, Fail-Safe, Request-To-Exit, Key Usage Switch, Latch Position Switch	\$1530
MLN-G20-D21-630	Fire-Rated Narrow-Stile Mortise Lockset; 24vDC Release, Single Entry, Fail-Secure, Request-To-Exit	\$1182
CLS-G20-D21-630	Cylindrical Control Trim Package With Fire-Rated Deadlatch; 24vDC Release, Single Entry, Fail-Secure, Request-To-Exit	\$1122
CLS-G20-D24-630	Cylindrical Control Trim Package With Fire-Rated Deadlatch; 24vDC Release, Single Entry, Fail-Secure, Request-To-Exit, Key Usage Switch, Latch Position Switch	\$1425

ELECTRA PRICE LIST

ELECTRA M Series	DESCRIPTION	LIST PRICE
MLA	With "A" Series Mortise Lock	\$1,105
MLP	MLA With Door Position Switch	\$1,305
MLS	With "S" Series Mortise Lock	\$1,190
MLM	With Mini-Mortise Lock	\$1,105
MLN	Narrow Stile Mortise Lock	\$1,105
MLX	Mortise Lock By Others	\$1,020
MLD	MLX With Spindle On Diamond	\$1,055
MLZ	With "Z" Series Detention Mortise Lock	\$1,570
MLQ	MLM With Door Position Switch	\$1,300
M	Change "L" To "M" For Maglock Control Models	add 310
ELECTRA C Series	DESCRIPTION	LIST PRICE
CLS	With 2 1/4" Wide Mounting Plate	\$1,045
CLW	With Extra Wide 3 1/2" Mounting Plate	\$1,085
M	Change "L" To "M" For Maglock Control Models	add 310
TRIM STYLE	DESCRIPTION	ADD TO LIST PRICE
G2	GG Style Trim; Durable, Slip Clutch Models (vandal-resistant)	-
LEVER TYPE	DESCRIPTION	ADD TO LIST PRICE
0	Standard With Return	-
2	Tapered	77
3	Tubular With Return	77
4	Tapered With Return	77

CONTINUED ON NEXT PAGE

ELECTRA™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

FUNCTION GROUPS	DESCRIPTION	ADD TO LIST PRICE
D11	24vDC Release, Single Entry, Fail-Secure (Store Room Function)	-
D13	24vDC Release, Key Usage Switch	\$180
D14	24vDC Release, Key Usage Switch, Latch Position Switch	325
D15	24vDC Release, Key On/Off Switch	125
D16	24vDC Release, Latch Position Switch, Key On/Off Switch	240
D17	24vDC Release, Latch Position Switch	135
D21	24vDC Release, Request-To-Exit Signal	77
D23	24vDC Release, Key Usage Switch, Request-To-Exit Signal	245
D24	24vDC Release, Key Usage Switch, Latch Position Switch, Request-To-Exit Signal	380
D25	24vDC Release, Request-To-Exit Signal, Key On/Off Switch	190
D26	24vDC Release, Latch Position Switch, Request-To-Exit Signal, Key On/Off Switch	325
D27	24vDC Release, Latch Position Switch, Request-To-Exit Signal	205
A27	24vAC Release, Latch Position Switch, Request-To-Exit Signal	205
D31	24vDC Release, Classroom Function	57
D37	24vDC Release, Latch Position Switch, Classroom Function	165
D41	24vDC Release, Request-To-Exit Signal, Classroom Function	130
D47	24vDC Release, Latch Position Switch, Request-To-Exit Signal, Classroom Function	235
R11	Re-Entry Function, 24vDC Required, Fail-Safe	57
R13	Re-Entry Function, Key Usage Switch	225
R17	Re-Entry Function, Latch Position Switch	180
R21	Re-Entry Function, Request-To-Exit Signal	135
R23	Re-Entry Function, Key Usage Switch, Request-To-Exit Switch	310
R24	Re-Entry Function, Key Usage Switch, Latch Position Switch, Request-To-Exit Signal	425
R27	Re-Entry Function, Latch Position Switch, Request-To-Exit Switch	250
A11	24vAC (30VA) Release, Single Entry, Fail-Secure	-
A21	24vAC (30VA) Release, Request-To-Exit Signal	82
M10	Mechanical, Single Entry	-120
M30	Mechanical, Classroom Function	-75
M00	Mechanical, Dummy Trim	-310
M02	Passage Trim With No Cylinder Opening	-165
M03	Passage Trim With Cylinder Opening	-165

MAGLOCK CONTROL	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (For Maglock Control Only)		
E0	Maglock By Others	-
E1	1,200 lb. Holding Force Electromagnetic Lock	650
E2	E1 With Bond Sensor	825
E3	E1 With Door Status Switch	825
E4	E1 With E2 & E3 Features	1000

SPECIAL OPTIONS	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (List As Needed)		
F1	Lever Position Switch	165
F3	Thick Door (2 - 2 1/2")	40
F4	LED Lever Release Indicator	290
F5	Security Fasteners	30
F6	Piezo Sounders For Lever	80

CONTINUED ON NEXT PAGE

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

ELECTRA™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

FINISH	DESCRIPTION	ADD TO LIST PRICE
630	Satin Stainless Steel	-
605	Bright Brass	\$370
606	Satin Brass	320
611	Bright Bronze	Call Factory
612	Satin Bronze	Call Factory
613	Oil Rubbed Bronze -Powder Coated-	215
625	Bright Chrome	Call Factory

DOOR HANDING	DESCRIPTION	ADD TO LIST PRICE
LHR	Left Hand Reverse Door	-
RHR	Right Hand Reverse Door	-
LH	Left Hand Door	-
RH	Right Hand Door	


All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

ACCED™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

COMPLETE CONTROL TRIM & EXIT DEVICE PACKAGES

*Below is pricing for Securitech's popular ACCED models.
To price other custom models start with the series as the base price.
Add the appropriate prices for each designation.
The total is the model's list price.*



POPULAR MODEL PRICING (Specify handing.)

MODELS (page E4.2)		LIST PRICE
EDR-G20-D24-AI-630	24vDC Release, Single Entry, Fail-Secure, Key Usage Switch, Latch Position Switch, Request-To-Exit	\$2325
EDR-G20-D21-AI-630	24vDC Release, Single Entry, Fail-Secure, Request-To-Exit	\$2000
EDR-G20-R24-AI-630	24vDC Re-Entry Release, Single Entry, Fail-Safe, Key Usage Switch, Latch Position Switch, Request-To-Exit	\$2390
EDR-G20-R21-AI-630	24vDC Re-Entry Release, Single Entry, Fail-Safe, Request-To-Exit	\$2040
FDR-G20-D24-AI-630	Fire-Rated, 24vDC Release, Single Entry, Fail-Secure, Key Usage Switch, Latch Position Switch, Request-To-Exit	\$2445
FDR-G20-D21-AI-630	Fire-Rated, 24vDC Release, Single Entry, Fail-Secure, Request-To-Exit	\$2120
FDR-G20-R24-AI-630	Fire-Rated, 24vDC Re-Entry Release, Single Entry, Fail-Safe, Key Usage Switch, Latch Position Switch, Request-To-Exit	\$2510
FDR-G20-R21-AI-630	Fire-Rated, 24vDC Re-Entry Release, Single Entry, Fail-Safe, Request-To-Exit	\$2160

ACCED PRICE LIST

ACCED R	DESCRIPTION	LIST PRICE
EDR	Rim Exit Device	\$1,905
FDR	Fire-Rated Rim Exit Device	\$2,025
EMR	Rim Device With Maglock Control	\$2,185
FMR	Fire-Rated Rim Device With Maglock Control	\$2,305
ACCED SVR	DESCRIPTION	LIST PRICE
EDS	Surface Vertical Rod Exit Device	\$2,335
FDS	Fire-Rated Surface Vertical Rod Exit Device	\$2,455
EMS	Surface Vertical Rod With Maglock Control	\$2,615
FMS	Fire-Rated EMS Surface Vertical Rod With Maglock Control	\$2,735
ACCED CVR	DESCRIPTION	LIST PRICE
EDC	Concealed Vertical Rod Exit Device	\$2,455
FDC	Fire-Rated Concealed Vertical Rod Exit Device	\$2,580
EMC	Concealed Vertical Rod With Maglock Control	\$2,735
FMC	Fire-Rated Concealed Vertical Rod With Maglock Control	\$2,860
ACCED M	DESCRIPTION	LIST PRICE
EDM	Mortise Exit Lock	\$2,275
FDM	Fire-Rated Mortise Exit Lock	\$2,400
EMM	Mortise Device With Maglock Control	\$2,560
FMM	Fire-Rated Mortise Device With Maglock Control	\$2,685
ACCED RB	DESCRIPTION	LIST PRICE
EDB	Rim Bolt Exit Device	\$1,995
FDB	Fire-Rated Rim Bolt Exit Device	\$2,115
EMB	Rim Bolt Device With Maglock Control	\$2,275
FMB	Fire-Rated Rim Bolt Device With Maglock Control	\$2,400

CONTINUED ON NEXT PAGE

ACCED™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

NARROW STILE	DESCRIPTION	ADD TO LIST PRICE
-N	Narrow-Cover (add designation after series code); Not Available For ACCED M	\$155

TRIM STYLE	DESCRIPTION	ADD TO LIST PRICE
G2	GG Style Trim; Durable, Slip Clutch Models (vandal-resistant)	-

LEVER TYPE	DESCRIPTION	ADD TO LIST PRICE
0	Standard With Return	-
2	Tapered	42
3	Tubular With Return	42
4	Tapered With Return	42

FUNCTION GROUPS	DESCRIPTION	ADD TO LIST PRICE
D11	24vDC Release, Single Entry, Fail-Secure	-
D13	24vDC Release, Key Usage Switch	180
D14	24vDC Release, Key Usage Switch, Latch Position Switch	325
D15	24vDC Release, Key On/Off Switch	125
D16	24vDC Release, Latch Position Switch, Key On/Off Switch	275
D17	24vDC Release, Latch Position Switch	155
D21	24vDC Release, Request-To-Exit Signal	95
D23	24vDC Release, Key Usage Switch, Request-To-Exit Signal	285
D24	24vDC Release, Key Usage Switch, Latch Position Switch, Request-To-Exit Signal	420
D25	24vDC Release, Request-To-Exit Signal, Key On/Off Switch	220
D26	24vDC Release, Latch Position Switch, Request-To-Exit Signal, Key On/Off Switch	365
D27	24vDC Release, Latch Position Switch, Request-To-Exit Signal	235
D31	24vDC Release, Classroom Function	57
D37	24vDC Release, Latch Position Switch, Classroom Function	185
D41	24vDC Release, Request-To-Exit Signal, Classroom Function	130
D47	24vDC Release, Latch Position Switch, Request-To-Exit Signal, Classroom Function	280
R11	Re-Entry Function, 24vDC Required, Fail-Safe	57
R13	Re-Entry Function, Key Usage Switch	225
R17	Re-Entry Function, Latch Position Switch	205
R21	Re-Entry Function, Request-To-Exit Signal	135
R23	Re-Entry Function, Key Usage Switch, Request-To-Exit Switch	310
R24	Re-Entry Function, Key Usage Switch, Latch Position Switch, Request-To-Exit Signal	485
R27	Re-Entry Function, Latch Position Switch, Request-To-Exit Switch	295
A11	24vAC (30VA) Release, Single Entry, Fail-Secure	-
A21	24vAC (30VA) Release, Request-To-Exit Signal	95
M10	Mechanical, Single Entry	-120
M30	Mechanical, Classroom Function	-75
M00	Mechanical, Dummy Trim	-145

DOOR	DESCRIPTION	ADD TO LIST PRICE
A	30" - 36" Wide Doors	-
B	36 1/2" - 48" Wide Doors	62
C	24" - 29 1/2" Wide Doors	470

WIRING	DESCRIPTION	ADD TO LIST PRICE
I	Internal Wiring (at back of bar)	-
T	Armored Transfer Cable	42
L	Internal Wiring With Long Leads	27

CONTINUED ON NEXT PAGE

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

ACCED™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

HEIGHT	DESCRIPTION	ADD TO LIST PRICE
FOR VERTICAL ROD MODELS ONLY (7' Is Standard)		
8	For Doors Up to 96"	\$52
10	For Doors Up to 120"	215

MECHANICAL DOGGING	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (Electric Dogging Is Standard)		
D	Allen Keyed Dogging	42
KD	Cylinder Keyed Dogging	60

MAGLOCK	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (For Maglock Control Only)		
E0	Maglock By Others	-
E1	1,200 lb. Holding Force Electromagnetic Lock	630
E2	E1 With Bond Sensor	800
E3	E1 With Door Status Switch	800
E4	E1 With E2 & E3 Features	970

SPECIAL FUNCTIONS	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (List As Needed)		
F1	Lever Position Switch	160
F3	Thick Door (2-2 1/2)	42
F4	LED Lever Release Indicator	285
F5	Security Fasteners	32
F6	Piezo Sounder For Lever	80

FINISH (For Trim Only)	DESCRIPTION	ADD TO LIST PRICE
630	Satin Stainless Steel	-
605	Bright Brass	370
606	Satin Brass	320
611	Bright Bronze	Call Factory
612	Satin Bronze	Call Factory
613	Oil Rubbed Bronze -Powder Coated-	215
629	Polished Stainless Steel	-
626	Satin Chrome	Call Factory

DOOR HANDING	DESCRIPTION	ADD TO LIST PRICE
LHR	Left Hand Reverse Door	-
RHR	Right Hand Reverse Door	-

SS Device

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.



POWER SUPPLY Pricing

54-60 46th Street, Maspeth NY 11378 | toll: 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

POWER SUPPLY PRICE LIST

SINGLE DOOR POWER	DESCRIPTION	LIST PRICE
PS-D111	24vDC Release; Function Groups Begin With "D"	\$435
PS-A111	24vAC (30VA) Release; Function Groups Begin With "A"	435
PS-R111	Re-Entry DC Power; Function Groups Begin With "R"	435
PS-A112	24vAC (30VA) Release; Function Groups Begin With "A" Wet/Dry Input	520
PS-D121	24vDC Release; Custom ELECTRA Model (Contact Factory)	605
-E	24vDC Electromagnetic Lock Power	add 190
-2	2 Separate Doors; Release By Single Input	add 190
TWO DOOR POWER	DESCRIPTION	LIST PRICE
PS-D131	24vDC Release; Function Groups Begin With "D"	565
PS-A131	24vAC (30VA) Release; Function Groups Begin With "A"; Access Control, Dry Contact	565
PS-R131	Re-Entry DC Power; Function Groups Begin With "R"	565
PS-A132	24vAC (30VA) Release; Function Groups Begin With "A"; Intercom, 16vAC Wet Input or Dry Contact	725
TIMED RELEASE	DESCRIPTION	LIST PRICE
PS-D141	24vDC Release; Function Groups Begin With "D"	970
PS-R141	Re-Entry DC Power; Function Groups Begin With "R"	970
-2	To Control 2 Doors With Single Timer	add 130

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.



POWER TRANSFER Pricing

54-60 46th Street, Maspeth NY 11378 | toll: 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

POWER TRANSFER PRICE LIST

YAMAKA	DESCRIPTION	LIST PRICE
YMK-20	Power Transfer Module; Mounts On Top Of Door; Flat Plate Onto Header	\$95
YMK-21	Power Transfer Module; Mounts In Frame With Flat Plate On Door	105

DOOR CORDS	DESCRIPTION	LIST PRICE
DC1-18-A	18" Loop; Stainless Steel Cable, Aluminum Finish Cap	72
DC1-18-D	18" Loop; Stainless Steel Cable, Duronodic Finish Cap	72
DC1-24-A	24" Loop; Stainless Steel Cable, Aluminum Finish Cap	82
DC1-24-D	24" Loop; Stainless Steel Cable, Duronodic Finish Cap	82

PANIC BAR CORD	DESCRIPTION	LIST PRICE
PTC-48	For Doors Up To 36"; Stainless Steel Cable, Includes Clips For Panic Bar	77
PTC-60	For Doors Up To 48"; Stainless Steel Cable, Includes Clips For Panic Bar	90
PTCP-48	For Doors Up To 48"; Stainless Steel Cable & Pipe, Includes Clips For Levers	125

MINI-HINGE	DESCRIPTION	LIST PRICE
ECHFM-R-AL-4	Matches Roton 780-112 - 4 Wires - Aluminum	185
ECHFM-R-DU-4	Matches Roton 780-112 - 4 Wires - Duronodic	185
ECHFM-Z-AL-4	Matches Zero 910 - 4 Wires - Aluminum	185
ECHFM-Z-DU-4	Matches Zero 910 - 4 Wires - Duronodic	185
ECHFM-R-AL-6	Matches Roton 780-112 - 6 Wires - Aluminum	210
ECHFM-R-DU-6	Matches Roton 780-112 - 6 Wires - Duronodic	210
ECHFM-Z-AL-6	Matches Zero 910 - 6 Wires - Aluminum	210
ECHFM-Z-DU-6	Matches Zero 910 - 6 Wires - Duronodic	210
ECHFS-R-AL-4	Matches Roton 780-157 - 4 Wires - Aluminum	260
ECHFS-R-DU-4	Matches Roton 780-157 - 4 Wires - Duronodic	260
ECHFS-Z-AL-4	Matches Zero 935 - 4 Wires - Aluminum	260
ECHFS-Z-DU-4	Matches Zero 935 - 4 Wires - Duronodic	260
ECHHS-R-AL-4	Matches Roton 780-054 - 4 Wires - Aluminum	260
ECHHS-R-DU-4	Matches Roton 780-054 - 4 Wires - Duronodic	260
ECHHS-Z-AL-4	Matches Zero 920 - 4 Wires - Aluminum	260
ECHHS-Z-DU-4	Matches Zero 920 - 4 Wires - Duronodic	260

ELECTRIFIED HINGE	DESCRIPTION	LIST PRICE
EH4040-626-4	Full Mortise; 4 Wires, 4" Tall, 4" Wide	315
EH4540-626-4	Full Mortise; 4 Wires, 4.5" Tall, 4" Wide	315
EH4545-626-4	Full Mortise; 4 Wires, 4.5" Tall, 4.5" Wide	315
EH5045-626-4	Full Mortise; 4 Wires, 5" Tall, 4.5" Wide	370
EH5050-626-4	Full Mortise; 4 Wires, 5" Tall, 5" Wide	370
	For Door Position Switch Change Designation "EH" To "ED"	add 170
	For 6 Wires; Change Last Designation To -6	add 85
	For 8 Wires; Change Last Designation To -8	add 130
	For 10 Wires; Change Last Designation To -10	add 155
	Change Finish Designation From "626" To 630 (Stainless Steel)	add 95
	Contact Factory For Heavy Hinge Pricing	

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

RACHIE™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

CODE-COMPLIANT ENTRY & EXIT CONTROL SYSTEMS

Below is pricing for Securitech's basic 2 door RACHIE Entry & Exit Control Systems. Contact the factory for Custom Entry & Exit Control Systems.



BASIC RACHIE MODEL PRICING

SYSTEM (see E6.0)	DESCRIPTION	LIST PRICE
RA-M101	RA-M100 Controller; 2 Doors With Electromagnetic Locks A/B Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, Security Fasteners, 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Secure	Call Factory
RA-M102	RA-M100 Controller; 2 Doors With Electromagnetic Locks A/B Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, Security Fasteners, 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe	Call Factory
RA-M103	RA-M100 Controller; 2 Doors With Electromagnetic Locks A/B Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, Security Fasteners, 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, 630 Stainless Steel Finish Exterior: Fail-Safe Interior: Fail-Safe	Call Factory
RA-M104	RA-M100 Controller; 2 Doors With Electromagnetic Locks A/B Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, Security Fasteners, 630 Stainless Steel Finish Exterior: Fail-Safe Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Bond Sensor, Door Status Switch, 630 Stainless Steel Finish Exterior: Fail-Safe Interior: Fail-Safe	Call Factory

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

RACHIE™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

CODE-COMPLIANT ENTRY & EXIT CONTROL SYSTEMS

Below is pricing for Securitech's basic 2 door RACHIE Entry & Exit Control Systems. Contact the factory for Custom Entry & Exit Control Systems.



BASIC RACHIE MODEL PRICING

SYSTEM (see E6.0)	DESCRIPTION	LIST PRICE
RA-E101	RA-E100 Controller; 2 Doors With Electric Trims Only A/B Door: "A" Series Mortise Lock With GG Trim, Door Position Switch Body, Request-To-Exit (both sides), Latch Position Switch 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Lever Position Switch, Latch Position Switch, Request-To-Exit (both sides), Door Position Switch, 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Secure	Call Factory
RA-E102	RA-E100 Controller; 2 Doors With Electric Trims Only A/B Door: "A" Series Mortise Lock With GG Trim, Door Position Switch Body, Request-To-Exit (both sides), Latch Position Switch 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Lever Position Switch, Latch Position Switch, Request-To-Exit (both sides), Door Position Switch, 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe	Call Factory
RA-E103	RA-E100 Controller; 2 Doors With Electric Trims Only A/B Door: "A" Series Mortise Lock With GG Trim, Door Position Switch Body, Request-To-Exit (both sides), Latch Position Switch 630 Stainless Steel Finish Exterior: Fail-Secure Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Lever Position Switch, Latch Position Switch, Request-To-Exit (both sides), Door Position Switch, 630 Stainless Steel Finish Exterior: Fail-Safe Interior: Fail-Safe	Call Factory
RA-E104	RA-E100 Controller; 2 Doors With Electric Trims Only A/B Door: "A" Series Mortise Lock With GG Trim, Door Position Switch Body, Request-To-Exit (both sides), Latch Position Switch 630 Stainless Steel Finish Exterior: Fail-Safe Interior: Fail-Safe C/D Door: "A" Series Mortise Lock With GG Trim, Lever Position Switch, Latch Position Switch, Request-To-Exit (both sides), Door Position Switch, 630 Stainless Steel Finish Exterior: Fail-Safe Interior: Fail-Safe	Call Factory


All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

ARTE™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

CODE-COMPLIANT RELEASE OF ELECTROMAGNETIC LOCKS

Below is pricing for Securitech's popular ELECTRA models.
 To price other custom models start with the series as the base price.
 Add the appropriate prices for each designation.
 The total is the model's list price.



POPULAR MODEL PRICING (Specify handing.)

MODELS (page E5.1)	LIST PRICE
STL-G10-SJN-EO-630 Single Trim With Jack-Nuts; No Lock Control	\$555
STA-G10-PTB-EO-630 Pair Of Trims With Thru-Bolts; "A" Series Mortise Lock	\$820

ARTE PRICE LIST

SERIES	DESCRIPTION	LIST PRICE
STL	Single Lever Trim Only; No Lock Control	555
STA	Single Lever Trim With "A" Series Mortise Lock	710
STC	Single Lever Trim With Cylindrical Latch set	650
STX	Single Lever Trim With Mortise Lock By Others	650
M	Change "T" To "M" For Maglock Control - Single Trim	add 145
	- Pair of Trims	add 285

TRIM STYLE	DESCRIPTION	ADD TO LIST PRICE
G1	GG Style Trim	-

LEVER TYPE	DESCRIPTION	ADD TO LIST PRICE
0	Standard With Return	Single/Pair
2	Tapered	42 77
3	Tubular With Return	42 77
4	Tapered With Return	42 77

TRIM SIDES	DESCRIPTION	ADD TO LIST PRICE
S	Single Trim	-
P	Pair; Exterior Lever Does Not Have Switches	145

MOUNTING	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (For Single Trim Models Only)		
JN	Jack-Nuts	-
TB	Thru-Bolt	25

MAGNETIC LOCK	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (Maglock Control Models Only)		
E0	Maglock By Others	-
E1	1,200 lb. Holding Force	650
E2	E1 With Bond Sensor	825
E3	E1 With Door Status Switch	825
E4	E1 With E2 & E3 Features	1000

CONTINUED ON NEXT PAGE

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.

ARTE™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

SPECIAL OPTIONS	DESCRIPTION	ADD TO LIST PRICE
OPTIONAL (List As Needed)		
F3	Thick Door (2 - 2 1/2")	\$37
F5	Security Fasteners	31
F7	Exterior Lever Activated Switch	145
FINISH	DESCRIPTION	ADD TO LIST PRICE
630	Satin Stainless Steel	-
605	Bright Brass	160
606	Satin Brass	215
625	Bright Chrome	215
626	Satin Chrome	215
HANDING	DESCRIPTION	ADD TO LIST PRICE
LH	Left Hand	-
LHR	Left Hand Reverse	-
RH	Right Hand	-
RHR	Right Hand Reverse	-

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.




SECURIGUARD™ Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

CONCEALED CYLINDER RESISTS VANDALISM, BUMPING, & UNAUTHORIZED KEY USE

Select a model and finish.



SECURIGUARD PRICE LIST

MODELS	DESCRIPTION	LIST PRICE
6300	Standard Unit	\$210
6302	Use Over 'Schlage' Dead Bolts	245
6305	For IC Cylinders (includes 63BAP)	245
63PP	With Pull For Use With Exit Devices	405
6310	6300 Furnished With 3 Keys	225
6315	6305 Furnished With 3 Keys	275
6400	6300 With Removable Bay	230
6402	6302 With Removable Bay	280
6405	6305 With Removable Bay	280
64PP	63PP With Removable Bay	4230
6300DG	Blank Faceplates - No Locking	125
FINISH	DESCRIPTION	LIST PRICE
AL	Aluminum	
JB	Jet Black	
ACCESSORIES	DESCRIPTION	LIST PRICE
63BAP	Converts 6300 Or 6310 For Use With Removable Core Cylinders	47
63KEY	1 Additional Key With Combination	20
63BAY	2 Replacement Locking Bay With 2 Keys	125

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.




MP POLICE LOCK Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

SURFACED APPLIED MULTI-POINT LOCKING SYSTEMS

*To price a model, start with the locking points as the base price.
Add the appropriate prices for each designation.
The total is the model's list price.*



POPULAR MODEL PRICING

MODELS (page M2.2)		LIST PRICE
4840B-TTHG-37	4-Point Auxiliary Lock For Outswinging Doors; Hard Guard	\$695
4840A-TTHG-37	4-Point Auxiliary Lock For Inswinging Doors; Hard Guard	\$695
4840B-TTBG-37	4-Point Auxiliary Lock For Outswinging Doors; Best Guard	\$710
4840A-TTBG-37	4-Point Auxiliary Lock For Inswinging Doors; Best Guard	\$710

MP POLICE LOCK PRICE LIST

LOCKING POINTS	DESCRIPTION	LIST PRICE
4840	4-Point (2 Vertical, 2 Horizontal)	615
4822	2-Point (2 Vertical)	490
4820	2-Point (2 Horizontal)	470

BOLT TYPE	DESCRIPTION	ADD TO LIST PRICE
A	Inswing Doors; Square Deadbolts	-
B	Outswing Doors; Round Deadbolts	-

INTERIOR	DESCRIPTION	ADD TO LIST PRICE
TT	Thumbturn	-
LT	Elongated Turnpiece	52
CO	Keyed Cylinder (Cylinder Included)	145

EXTERIOR	DESCRIPTION	ADD TO LIST PRICE
XX	No Exterior Operation	-
HG	Hard Guard	80
LG (BG)	Best Guard (Small & Large Format IC Core)	95
SG	Securiguard	280
DG	Dust Guard	190
SR	Securiguard With Removable Bay	295
TG	Thumb Guard	460

SIZE	DESCRIPTION	ADD TO LIST PRICE
37	For Doors Up To 36" Wide & 84" Tall	-
38	For Doors Up To 36" Wide & 96" Tall	75
47	For Doors Up To 48" Wide & 84" Tall	75
48	For Doors Up To 48" Wide & 96" Tall	105

ACCESSORIES	DESCRIPTIONS	ADD TO LIST PRICE
MPK-EK6	6" Extension Rod	100
MPK-EK12	12" Extension Rod	100
MPK-EK24	24" Extension Rod	110
MPK-SP6	Set Of 3 Thick & 3 Thin Shims	40
MPK-SB	Strike Bracket	30
MPK-TD	Thick Door Kit	30
MPK-IN	Door Status Indicator	120
MPK-MS	Bolt Monitor Switch	110
MPK-TB2	Set of 2 Thru-Bolted Anti-Pry Plates	70
MPK-TB3	Set of 3 Thru-Bolted Anti-Pry Plates	95
MPK-TB4	Set of 4 Thru-Bolted Anti-Pry Plates	120




4850 Pricing

54-60 46th Street, Maspeth NY 11378 | 800.622.LOCK | local: 718.392.9000 | fax: 718.392.8944 | www.securitech.com

SURFACED APPLIED MULTI-POINT LOCKING SYSTEMS

To price a model, start with the locking points as the base price.
Add the appropriate prices for each designation.
The total is the model's list price.



POPULAR MODEL PRICING

MODELS		LIST PRICE
4850-TTHG-37	5-Point Auxiliary Lock For Outswinging Doors; Hard Guard	\$780
4850-TTHG-37	5-Point Auxiliary Lock For Inswinging Doors; Hard Guard	\$780
4850-TTBG-37	5-Point Auxiliary Lock For Outswinging Doors; Best Guard	\$800
4850-TTBG-37	5-Point Auxiliary Lock For Inswinging Doors; Best Guard	\$800

MP POLICE LOCK PRICE LIST

LOCKING POINTS	DESCRIPTION	LIST PRICE
4850	5-Point (2 Vertical, 1 Horizontal, 2 Hinge Side Bolts)	625
4851	4850 (Includes Shim Pack & 3 Thru-Bolts)	740

INTERIOR	DESCRIPTION	ADD TO LIST PRICE
TT	Thumbturn	-
LT	Elongated Turnpiece	65
CO	Keyed Cylinder (Cylinder Included)	150

EXTERIOR	DESCRIPTION	ADD TO LIST PRICE
XX	No Exterior Operation	-
HG	Hard Guard	155
LG (BG)	Best Guard (Small & Large Format IC Core)	175
SG	Securiguard	290
DG	Dust Guard	200
SR	Securiguard With Removable Bay	315
TG	Thumb Guard	465

SIZE	DESCRIPTION	ADD TO LIST PRICE
37	For Doors Up To 84" Tall	-
38	For Doors Up To 96" Tall	75

ACCESSORIES	DESCRIPTIONS	ADD TO LIST PRICE
MPK-EK6	6" Extension Rod	105
MPK-EK12	12" Extension Rod	105
MPK-EK24	24" Extension Rod	115
MPK-SP6	Set Of 3 Thick & 3 Thin Shims	40
MPK-SB	Strike Bracket	30
MPK-TD	Thick Door Kit	30
MPK-IN	Door Status Indicator	125
MPK-MS	Bolt Monitor Switch	115
MPK-TB2	Set of 2 Thru-Bolted Anti-Pry Plates	65
MPK-TB3	Set of 3 Thru-Bolted Anti-Pry Plates	100
MPK-TB4	Set of 4 Thru-Bolted Anti-Pry Plates	120
MPK-BSB	Bullet Style Bolt	32

All hardware is manufactured for Standard 3' x 7' x 1-3/4" doors.