

PRECISION EXIT DEVICES



About the Company

Our History

When you trace it all the way back, it comes down to three individuals: Frederick Stanley, Duncan Black and Alonzo Decker.

For more than 175 years, we're proud to continue their legacies and we're proud to carry their names forward.

In 1843, Frederick Stanley started a small shop in New Britain, Connecticut to manufacture bolts, hinges, and other hardware from wrought iron. With superior quality, consistent innovation, and rigorous operational improvement, Stanley's company defined excellence, and so did his products.

In 1910, S. Duncan Black and Alonzo G. Decker started their shop, similar in size at first, in Baltimore, Maryland. Six years later they changed the world by obtaining the world's first patent for a portable power tool, and the company they built has been changing the world ever since.

Both companies grew in parallel over the ensuing decades, amassing an unparalleled family of brands and products and an even more impressive wealth of industry expertise.

In 2010, the two companies combined to form Stanley Black & Decker, Inc. to deliver the tools and solutions that industrial companies, professionals, and consumers count on to be successful when it really matters.

Just as it was in 1843, our passion for excellence is seen around the world in our disciplined operations, purposeful business growth and loyal customer relationships.



Frederick Stanley



Duncan Black and Alonzo Decker

Simply Safe

PRECISION Hardware has been manufacturing panic and fire exit hardware for over a half century. PRECISION exit devices keep you safe by enabling egress in a way that is as easy as it is precise. Our exit devices have earned a reputation for withstanding the most abusive applications. Today, we offer a complete line of exit devices for a variety of security solutions.



Contents

GENERAL INFORMATION

| Terms and Conditions | 4 |
|---|----|
| Quoting and Ordering | 34 |
| Warranty | 6 |
| Return Authorization (RA) - Warranty | 37 |
| Return Authorization (RA) - Non Warranty | 38 |
| Fulfillment Issues | 38 |
| How to Order/Finishes/General Information | 7 |
| Forms | 39 |
| Special Weights | 33 |

| 2000 APEX SERIES WIDE STILE DEVICES, TRIMS & OPTIONS | |
|---|----|
| Rim Devices | 8 |
| Surface Vertical Rod Devices | 9 |
| Mortise Devices | 10 |
| Wood Door Concealed Vertical Rod Devices | 13 |
| Concealed Vertical Rod Devices | 14 |

| 2000 APEX SERIES NARROW STILE DEVICES, TRIMS & OPTIONS | |
|---|----|
| Rim Devices | 11 |
| Concealed Vertical Rod Devices | 12 |
| Decorative Levers | 15 |

| 5000 RELIANT SERIES RELIANT DEVICES, TRIMS & OPTIONS | |
|---|----|
| Rim Devices | 16 |
| Surface Vertical Rod Devices | 17 |

| 100, 200, 300 OLYMPIAN SERIES OLYMPIAN DEVICES, TRIMS & OPTIONS | |
|--|----|
| Rim Devices | 18 |
| Surface Vertical Rod Devices | 19 |
| Mortise Devices | 20 |

| ARM-A-DOR® | |
|------------------------------|----|
| Completed Product Assemblies | 21 |
| Optional Kits | 21 |
| Deadbolts | 21 |

TRIMS - WIDE STILE, NARROW STILE, OLYMPIANPull and Lever Trims22

| ELECTRICAL PRODUCTS | |
|--|----|
| Door Position Monitoring Switch | 26 |
| Electric Mortise Lock | 26 |
| Exit Alarm Kits | 26 |
| Power Supplies, Control Module, Battery Backup | 25 |
| Power Transfers | 26 |

ACCESSORIES

Dummy Touchbars, Mortise Lock, Fire Bolt Assembly, Transom Bracket, Tools, Cylinders 24

| CONVERSION KITS | |
|----------------------------|----|
| Cylinder Attachment Kits | 32 |
| Cylinder Dogging Kits | 28 |
| Electric Lock/Unlock Kits | 26 |
| ELR Conversion Kits | 25 |
| Monitoring Conversion Kits | 25 |
| Q Option Retrofit Kits | 25 |
| Shim Kits | 28 |
| Trim Conversion Kits | 32 |

| COMPONENT ASSEMBLIES | |
|----------------------|----|
| Apex Wide Stile | 27 |
| Apex Narrow Stile | 29 |
| Reliant | 30 |
| Olympian | 31 |

| MISCELLANEOUS | |
|-----------------------|----|
| Accessories | 24 |
| Cylinders | 24 |
| Mortise Locks | 24 |
| Mullions and Fittings | 23 |
| Screws and Fasteners | 7 |
| Security Screws | 7 |
| Sex Bolts | 7 |
| Strikes | 23 |



TERMS AND CONDITIONS OF SALE

The terms and conditions contained herein shall govern the sale of all Stanley products located in the Stanley price catalog and/or offered for sale by Stanley Security Solutions, Inc., except for those products as set forth under separate Stanley Value Added Reseller Agreements. The acceptance of any order is expressly made conditional upon your assent to these Terms and Conditions of Sale.

PRICES: Stanley reserves the right, in its sole discretion, to change or amend its price list (including, but not limited to, adding or removing Products from the price list), and standard terms and conditions of sale as contained in its catalogs, price list or published sales policies, without incurring any liability whatsoever to its Customer or others. All orders will be filled at the Stanley List Price in effect at the time of order placement. All prices are subject to change without notice and are not guaranteed.

TAXES: List prices do not include federal, state or local taxes.

ORDERS: No order for Products shall be deemed to have been accepted by Stanley until written notice of its acceptance is received by the Customer from Stanley via an order acknowledgement. Stanley reserves the right, in its sole discretion, to decline to accept any order. Purchase Orders will bind Stanley only to the extent accepted by Stanley's written confirmation or delivery.

Stanley will attempt to fill orders in the order in which they are received, subject to prior orders. However, Stanley reserves the right to allocate orders or fill an order or orders ahead of prior orders, if, in its judgment, the facts warrant such a change.

Any additional provisions in a Purchase Order, including any pre-printed terms, shall be void and not binding on Stanley, unless expressly accepted by Stanley. For greater certainty, the acceptance by Stanley of a Purchase Order shall not be deemed acceptance of the additional terms of such Purchase Order.

Stanley will accept orders via phone, email, fax or courier. Stanley will send out an order acknowledgement for all orders received via email, phone or fax.

Note: Receipt or possession of this price catalog does not grant approval to quote or purchase Stanley products. Please contact your Stanley Sales Representative for further details.

KEYING SYSTEM ORDERS: All orders of keying systems specifying delayed fulfillment must be fulfilled within twelve (12) months of the order date. Said request for fulfillment must include complete keying instructions for the order to be acknowledged with an estimated delivery date. Failure to properly request fulfillment of the order within twelve (12) months of the order date will make the order void and nonrefundable.

SPECIAL ORDERS: Any modification to a standard product configuration is considered a special order. No credits will be issued for returned special orders unless authorized by Stanley Customer Service.

INCOMPLETE ORDERS: An incomplete order is one that is not fully specified according to the appropriate nomenclature required for that product. Any incomplete order will not be entered and will be referred to the appropriate Stanley Sales Representative for resolution.

SAMPLES: Please contact your local Stanley Sales Representative for sample requests.

MINIMUM CHARGE: The expense of handling an order necessitates a minimum charge of \$50.00 net per invoice.

CREDIT LIMITS: Stanley's policy is to extend Net 30-day terms/open account combined with a credit line based on financial capacity. For all accounts Stanley requires a Credit Application and Sales Tax Exempt Certificate (if applicable). Stanley evaluates traditional sources of credit information: D&B, trade and bank references, financial information, and business plans. The supply of credit herein shall be at the discretion of Stanley. If available information and/or financial circumstances will not support open accounts terms, Stanley offers Cash in Advance and Credit Card (MasterCard or VISA) terms. Stanley performs periodic reviews of credit lines and terms of payment and may request updated financial information.

Stanley reserves the right to withhold delivery of Product if Customer does not meet Stanley's credit requirements for the amount of Product ordered, or the amount of Product which remains unpaid (whether or not overdue) exceeds the limit established by Stanley for Customer. Customer shall provide, at Stanley's request, an acceptable letter of credit or guarantee or security in a form and amount determined by Stanley.

If Customer shall become overdue on its account or otherwise defaults in any payment to Stanley or if its financial condition shall at any time appear inadequate to warranty further shipment on an open account basis, Stanley shall have the right, without liability, to refuse to accept any or all orders, to cancel any and all orders, to delay shipments, or to require advance payment before accepting or shipping any orders. All orders and all shipments are subject to approval by the Stanley Credit Department.

PAYMENT TERMS: Stanley standard payment terms are 2% 15, net 30 days from date of invoice.

Effective September 28, 2014, a \$45.00 convenience fee will apply to all payments made by Credit Card towards open invoices on your account. You may choose to pay by credit card by reaching out to your Credit Analyst directly in order to process payment. You can avoid paying the \$45.00 convenience fee by enrolling and paying open invoices via Billtrust Invoice Gateway (https://secure.billtrust.com/stanleymechanical/ig/signin) with an ACH Payment (bank transfer from checking or savings account) free of charge. Payments by check, or money order should continue to be sent directly to the remit-to address noted on invoices.

Stanley shall be entitled to charge and Customer shall pay interest on overdue invoices at the rate of two percent (2%) per month calculated from the date of the invoice to the date of payment, including any attorney fees incurred by Stanley resulting from the collection of such overdue payment. Customer shall pay all sums owing to Stanley without any deduction or abatement and Customer shall have no right of set-off.

In the event that Customer disputes any portion of the payment due, Customer shall be obligated to pay the balance which is not the subject of dispute.

Without limiting any other rights it may have under these terms of sale and applicable law, all of Stanley's obligations under this Agreement, including obligations of supply, or any Purchase Order, can be suspended or cancelled should Customer be delinquent in making payment for previously shipped Products.

October 2015



TERMS AND CONDITIONS OF SALE (continued)

INTERNATIONAL SALES:

International Resellers located outside of the United States of America who place orders are subject to and must pay by (1) Cash in Advance, (2) Confirmed Irrevocable Letter of Credit, (3) Standby Letter of Credit.

All international shipments shall be FCA (Incoterms 2010) from Stanley's facility in Indianapolis, Indiana USA. Stanley shall be deemed to have delivered all Products and related goods when such are put in the custody of a carrier at Stanley's plant or warehouse above, at which time all title and risk of loss or damage shall pass to Customer.

SHIPPING/FREIGHT: All Products shall be shipped FOB Origin domestic or FCA International (INCOTERMS 2010) from Stanley's facility in Indianapolis, Indiana USA. Stanley shall be deemed to have delivered all Products and related goods when such are put in the custody of a carrier at Stanley's plant or warehouse above, at which time all title, risk of loss or damage shall pass to Customer. All shipments will be made in accordance with the preferred routing, carrier assignments, and operational guidelines of Stanley. Customer shall bear all costs of freight, insurance and associated costs and shall make all arrangements for same.

Single or combined shipments including Stanley lock sets, exit devices, hinges and door closers will be considered for free freight with orders at or above \$5000 net (product combination must be on same purchase order). Orders less than \$5,000 will be shipped freight prepaid with shipping cost added to the invoice, including a nominal freight charge to be determined by Stanley at time of shipping.

Hinge only orders will be considered for free fright with orders at or above \$750 net. Orders less than \$750 will be shipped freight prepaid with shipping cost added to the invoice, including a nominal freight charge to be determined by Stanley at time of shipping.

These freight terms apply only to a single destination within the contiguous United States.

Should a shipment qualify for one of Stanley's free freight programs, the Products shall be shipped FOB Origin domestic (with exception to prepaid freight) or FCA International (INCOTERMS 2010) (with exception to prepaid freight) from Stanley's facility in Indianapolis, Indiana USA.

DELIVERY: Orders shall be acknowledged and given a scheduled delivery date based on estimated manufacturing lead times. Manufacturing lead time will begin once all information is received to process an order. Delivery dates given by Stanley as part of order acknowledgment for accepted orders for Products or related goods will be honored by Stanley on a best effort basis. Shipping dates shown on order acknowledgments are based upon Stanley's estimate and cannot be guaranteed. Stanley will not be liable for any loss or damage resulting from delay in filling orders, including any direct or consequential loss or damage. Stanley reserves the right to make partial shipments unless the order specifies otherwise.

CHANGES/CANCELLATIONS: After orders are entered for manufacturing, changes or cancellations cannot be accepted without Stanley written permission, and may be subject to a change or cancellation charge equivalent to 30% of the purchase price.

Orders for special and/or custom designed goods not immediately saleable to another customer are not changeable, cancelable, or returnable.

RETURNED GOODS: Stanley Customer Service MUST authorize all warranty and non-warranty related returns. Requests for returns can be initiated by submitting an email to RGACreditGRP@sbdinc.com. Only goods with an invoice date of less than one (1) year will be considered for a non-warranty related return and product must be returned in original packaging and in a resalable condition. All material returned to Stanley, regardless of the reason, must have a correct RA number applied to the outside of the shipping carton. A restocking charge of 30% of the purchase price will be applied to the Customer's account except for warranty returns. Transportation charges of returned goods must be prepaid by Customer. All goods must be returned in salable condition or after sixty (60) days of the RA issue date is subject to disposal by Stanley with no credit issued.

Stanley cannot authorize the return of discontinued product. Under no circumstances will special order items be accepted for return, unless covered by warranty.

EXPORT REGULATIONS: Customer agrees to conform to, and abide by, the export laws and regulations of the US, including, but not limited to, the Export Administration Act of 1979 as amended and its implementing regulations. Diversion contrary to US laws and regulations is prohibited.

MASTERKEYING: Stanley Masterkey Code and Masterkey Service Policy can be found at www.bestaccess.com.

LIMITED WARRANTY: The terms and conditions outlined above are subject to Stanley's Limited Warranty, which is included in the Stanley Price Catalog and is incorporated herein by reference. Upon return of a defective product, Stanley shall either repair or replace the product, in its sole discretion, in accordance with our standard warranty

EXCEPT AS SET FORTH HEREIN, STANLEY MAKES NO WARRANTIES, EXPRESSED OR IMPLIED, AND BUYER ACKNOWLEDGES THAT NO REPRESENTATIONS, WARRANTIES, PROMISES OR STATEMENTS HAVE BEEN MADE BY STANLEY, WITH RESPECT TO THIS PRODUCT, OR ANY PART OR PORTION THEREOF. IN ADDITION, STANLEY MAKES NO WARRANTY OF MERCHANTABILITY OF THIS PRODUCT OR ANY PART OR PORTION THEREOF, FOR ANY PURPOSE, NOR ANY WARRANTY WHICH EXTENDS BEYOND THE DESCRIPTION ON THE FACE HEREOF. STANLEY SHALL NOT, IN ANY EVENT, BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES SUFFERED BY BUYER OR ANYONE CLAIMING BY, THROUGH OR UNDER BUYER, AS A RESULT OF THE CONDITION OF THIS PRODUCT, OR ANY PART OR PORTION THEREOF, AND THERE ARE NO ORAL OR WRITTEN UNDERTAKINGS OR AGREEMENTS OF ANY TYPE PROVIDED BY STANLEY EXCEPT AS EXPRESSLY SET FORTH HEREIN. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR PROHIBIT THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION AND EXCLUSIONS MAY NOT APPLY IN YOUR STATE.

GOVERNING LAW: These Terms and Conditions of Sale and any subsequent sales agreements between Stanley and Customer shall be construed in accordance with the laws of the State of Indiana. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement.

October 2015



WARRANTY

What is Covered: Stanley Security Solutions, Inc. ("Stanley") warrants that all Products manufactured by Stanley and sold under its trade name "PRECISION HARDWARE" are free of defects in materials and workmanship as outlined below. The sole and exclusive liability of Stanley under this warranty is limited to the repair or replacement of any Product or component part covered by the warranty at the sole discretion of Stanley.

Who is Covered: This warranty is extended only to Stanley's distributors of products and the end user who purchases products for purposes other than resale (collectively, "Purchaser").

Hardware Warranty Period:

- Apex, Arm-A-Door, Reliant, Olympian Series (3, 4, 5R Exit Devices) mechanical products shall be warranted for five (5) years from the date of sale.
- Apex, Arm-A-Door, Reliant, Olympian Series (3, 4, 5R Exit Devices) electrical products shall be warranted for one (1) year from the date of sale
- RM Mullions (811 & 822 Series) shall be warranted for five (5) years from date of sale.
- Finishes shall be warranted for three (3) years from the date of sale excluding US10B/613 "Oil Rubbed Bronze" finish.

Stanley Wi-Q[™] Technology and B.A.S.I.S. Software:

.

- Stanley warrants that all software shall be free from defects in materials and workmanship and will function in substantial accordance to the specifications for a period of one (1) year from the date of installation.
- Specific Limitations:
 - This warranty does not cover any post-sales technical support under the following circumstances: 0
 - Problems caused by misuse of software or hardware
 - . Failure to provide a network connection or site phone line for a modem connection, if deemed necessary by Stanley
 - Technical support for network software products
 - Technical support for software installed on computer hardware or computer operating system that is no longer . commercially available for purchase.

Warranty Claims: Any Products believed to be defective as covered by this warranty may not be returned without prior written Returned Materials Authorization (RMA) from Stanley Product Support (800) 392-5209 covering specific items and quantities within thirty (30) days from the discovery of the alleged defect(s). Stanley will inform the purchaser where to ship said Product(s), shipping charges prepaid by you, for examination. In the event such examination reveals a defect covered by this warranty; Stanley will, at its sole option, repair or replace the Product, and return it or its replacement to the purchaser, with charges only for shipping.

Exclusions: This warranty specifically excludes, and Stanley shall not be held responsible for the following: a) COSTS ASSOCIATED WITH INSTALLING, REMOVING OR REINSTALLATION OF THE PRODUCT.

- Damage caused by Product malfunction or failure attributable to acts of God. b)
- Improper use or installation. C)
- d) Poor or no maintenance.
- Work performed by someone other than an Authorized Stanley technician. e)
- f) Failure to follow Stanley's operating instructions or environmental specifications.
- Incorrect application, modification, vandalism, erosion or corrosion, shipping and/or handling, improper storage, accident, misuse, abuse or g) any other cause not within the control of Stanley.
- This warranty is void if any modification is made to the warranty product, regardless of whether the modification causes or contributes to the h) alleged defect. All modifications are made at the risk and expense of the party making the modifications.
- Stanley shall not be liable for any repairs, replacements, or adjustments to the product or any costs of labor performed by the Purchaser or i) others without Stanley's prior written approval.
- Stanley provides no warranty or guarantee that its cores and/or cylinders will function properly or be mechanically compatible with products i) not manufactured by Stanley.
- The US10B/613 finish is considered to be a living finish that will change over time with use and age and is expressly excluded from this k) warranty. The finish changes that occur are indicative of normal wear and tear and reflect the essence of a living finish. The finish changes are not considered manufacturing defects and are not covered by this warranty.

Third Party Warranty: Except as otherwise provided above, Stanley makes no warranty, express or implied, with regard to third party hardware or software and expressly disclaims the implied warranties or conditions of merchantability or merchantable quality, fitness for a particular purpose, title, infringement and those arising by statute or otherwise in law. Customer's sole recourse for warranty claims is with the manufacturer of the Product. However, Stanley agrees to pass through any third party warranty that Stanley receives from the manufacturer of the Products to Purchaser. The extent of any third party warranty details, terms and conditions, remedies and procedures may be expressly stated on, or packaged with, or otherwise accompanying the Products.

LIMITATION OF WARRANTIES: THIS WARRANTY IS GIVEN EXPRESSLY AND IN PLACE OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE. THERE ARE NO UNDERSTANDINGS, AGREEMENTS, REPRESENTATIONS, OR WARRANTIES NOT SPECIFIED HEREIN.

STANLEY SHALL NOT, IN ANY EVENT, BE LIABLE FOR ANY CONSEQUENTIAL, INCIDENTAL, INDIRECT, SPECIAL OR PUNITIVE DAMAGES SUFFERED BY PURCHASER OR ANYONE CLAIMING BY, THROUGH OR UNDER PURCHASER, AS A RESULT OF THE CONDITION OF THIS PRODUCT, OR ANY PART OR PORTION THEREOF.


SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS OR PROHIBIT THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION AND EXCLUSIONS MAY NOT APPLY IN YOUR STATE.

THIS WARRANTY IS GOVERNED BY THE LAW OF THE STATE OF INDIANA WITHOUT REGARD TO ITS CONFLICTS OF LAW PRINCIPLES. STANLEY AND PURCHASER AGREE THAT THE UNITED NATIONS CONVENTION ON CONTRACTS FOR THE INTERNATIONAL SALE OF GOODS SHALL NOT APPLY TO SALE OF THE PRODUCTS COVERED BY THIS WARRANTY.



How to Order / Finishes / General Information

HOW TO ORDER

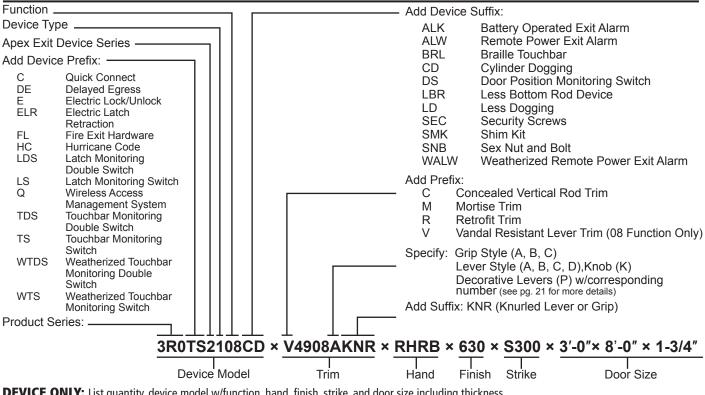

DEVICE ONLY: List quantity, device model w/function, hand, finish, strike, and door size including thickness. Note: For greater exit device mounting heights, see extended bottom rods (pages 35, 36, 37 & 38)

FINISHES

For standard finishes in each series, see individual product pages. For other finishes, consult factory.

| BHMA | US | DESCRIPTION |
|-------|-------|------------------------------------|
| 600* | USP | Primed for Paint |
| 605 | US3 | Bright Brass, Clear Coated |
| 606 | US4 | Satin Brass, Clear Coated |
| 612 | US10 | Satin Bronze, Clear Coated |
| 613 | US10B | Satin Bronze, Oxidized, Oil Rubbed |
| 625 | US26 | Bright Chrome Plated |
| 628 | US28 | Satin Aluminum, Clear Anodized |
| 630 | US32D | Satin Stainless Steel |
| 630AM | | Satin Stainless Steel with |
| | | UltraShield™ Antimicrobial coating |
| 689* | | Aluminum Paint / Powder Coat |
| 695* | | Dark Bronze Paint / Powder Coat |

UltraShield[™] Antimicrobial finish coating option available to Apex Exit Devices & Trims. 630AM list price add \$62.00 Exit Devices, \$25.00 Trims

SPLIT FINISHES

When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price (see specific device page), to appropriate "Trim" price (pag. 29). *Mullion finishes 689 & 695 finishes for Reliant series exit devices.

DEVICES FOR DOOR WIDTHS

Stock Size for 3'-0" or 4'-0" wide door is available for all series of devices. Stock Size for 2'-0" to 2'-6" wide door is also available for

Apex wide stile only. At customers request, 10 or more devices of any one door width will be cut at the factory free of charge. For factory cutting of less than 10 devices of any one size, add \$24 list per device cutting charge. Factory cutting of custom sizes for Reliant series exit devices not available.

DOOR THICKNESS

Rim and Surface Vertical Rod exit device accommodates doors ranging from 1 3/4"- 2 1/4" Mortise and Concealed Vertical Rod exit devices accommodate 1 3/4" thick doors. For applications exceeding the door thickness referenced above, please consult Product Support. Additional charges will apply.

FASTENERS

Furnished standard with machine screws and full thread wood/sheet metal screws. Specify Sex Nuts and Bolts "SNB" where recommended or required by the door manufacturer.

SEX NUTS & BOLTS (Not furnished standard)

1/4-20 Thread – When used with top & bottom

surface vertical rod latches: (Part # 02399-91 x Finish).

10-24 Thread – When used with end cap bracket, active case and rod guides: (Part # 02408-91 x Finish). If Sex Nuts and Bolts are required, see individual device pages for quantity required and pricing. To order separately, specify "SNB" × Finish. List price \$10 each.

SECURITY SCREWS

All exposed screws will be Torx[®] pin tamper resistant machine screws. Specify "SEC" Security Screws. If Security Screws are specified see individual device pages for the price.



-8

2100 3R0 – Apex Rim – Reversible, Wide Stile

| | OUT | SIDE FUNCTION | DEVICE × TRIM | 628 | 606, 612 613, 630 | 605 625 |
|----------|-----|--|--|------|----------------------|------------|
| | PUL | L TRIM: | | | | |
| ll Trim: | 01 | Exit only, cover plate | 2101 × 1701 | 1274 | 1468 | 1642 |
| | 02 | Exit only, dummy trim | 2102 × 1702A | 1422 | 1616 | 1797 |
| | 03 | Key retracts latchbolt | 2103 × 1703A | 1422 | 1010 | 1/9/ |
| | 05 | Key controls thumb piece | 2105 × 1705A | 1522 | 1716 | 1879 |
| | 15 | Thumb piece always active | 2115 × 1715A | 1522 | 1710 | 18/9 |
| | | (Devices with 2000C Series Trim are the same price | e) | | | |
| | LEV | /ER/KNOB TRIM: | | | | |
| | 01 | Exit only, cover plate | 2101 × 4901 | 1318 | 1512 | 1674 |
| | 02 | Exit only, dummy trim | 2102 × 4902A | 1010 | 1000 | 2054 |
| | 03 | Key retracts latchbolt | 2103 × 4903A | 1612 | 1806 | 2054 |
| | 08 | Key controls lever/knob | 2108 × 4908A | | | |
| /er/Knob | 08 | Key controls lever | 2108 × V4908A | 1722 | 1916 | 2165 |
| Trim: | 14 | Lever/knob always active | 2114 × 4914A | | | |
| | 10 | Inside key controls lever/knob | 2110 × 4908A | | | |
| 3 | | Outside key retracts latchbolt | 2110 × V4908A | 2026 | 2221 | 2494 |
| | 10 | Inside key controls lever/knob | 2110 × 4914A | | | |
| | DE\ | /ICE ONLY: | | | | |
| | | 01, 02, 03, 05, 08, 14, 15 | 21, 2101, 2102, 2103*, 2105, 2108, 2114, 2115 | 1173 | 1367 | 1505 |
| | | *2103 Device × Cylinder Only Application include | | | | |
| | | Elec. Device | E2103 \times 4908A | | | |
| | E | Electric Lock/Unlock Outside Trim | E2103 × V4908A | 2281 | 2475 | 2724 |
| | | | | | | |
| | FL | Fire Rated Hardware Specify prefix "FL" (e.g. | FL2103) Dogging option NOT availal | ble | | Add 173 |

Options

| PREFIX | (ADD TO DEVICE #) | ADD | SUFFIX | (ADD TO DEVICE #) | ADD | |
|--------|--|--------------|-----------------------------|---|-----|--|
| С | Pre-Terminated Quick Connect Plug ** | N/C | ALK | Exit Alarm: battery operated kit (9V battery included) | 557 | |
| DE | Delayed Egress: REQUIRES PS161-6 Power Supply | 1555 | ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 | |
| DL | (page 31) | | BRL | Braille Touchbar | 93 | |
| Е | Electric Lock/Unlock with Lock/Unlock monitoring (see above) | - | CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 | |
| ELR | Electric Latch Retraction: REQUIRES ELR150 Series | 809 | DS | Door Position Monitoring Switch | 116 | |
| ELK | Power Supply (pg. 32) | 809 | LD | Less Dogging | 36 | |
| HC | Hurricane Code Device | 36 | SEC | Security Screws | 48 | |
| LDS | Latchbolt Monitoring Double Switch | 280 | SNB | Sex Nut and Bolt (6 req'd) without Trim | 66 | |
| LS | Latchbolt Monitoring Switch | 230 | SNB | Sex Nut and Bolt (2 req'd) with Trim | 22 | |
| Q | Wireless Access Management System | 470 | WALW | Weatherized Exit Alarm: | 725 | |
| TDS | Touchbar Monitoring Double Switch | 280 | WALW | Remote power (24 VDC) | 125 | |
| TS | Touchbar Monitoring Switch | 230 | Devices | for Retrofit Applications prefix Trim with the letter "R" | | |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 | (e.g. R4 | | | |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 | | are priced less cylinders. If cylinder is required please sers on pg. 30. | e | |
| NOTES: | UltraShield [™] Antimicrobial finish coating option | available to | Devices | for 3'-0" door are furnished standard. | | |
| | Apex Exit Devices & Trims. | | Devices | for 2'-6" & 4'-0" doors are available at no extra charge | | |
| | | 62.00 | ** See St | anley Hinges & Door Accessories price book for Wire | | |
| | - 630AM list price for Trims Add | 25.00 | Harness product | | | |

TO ORDER: Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



2200

3R0 – Apex Surface Vertical Rod – Reversible, Wide Stile

-

| | | | | 606, 612 | 605 |
|------------|---|--|------|----------|------------|
| | OUTSIDE FUNCTION | DEVICE × TRIM | 628 | 613, 630 | 625 |
| | PULL TRIM: | | | | |
| Pull Trim: | 01 Exit only, cover plate | 2201 × 1701 | 1790 | 1995 | 2188 |
| | 02 Exit only, dummy trim | 2202 × 1702A | 1938 | 2143 | 2343 |
| 6 | 03 Key retracts latchbolt | 2203 × 1703A | 1920 | 2145 | 2343 |
| | 05 Key controls thumb piece | 2205 × 1705A | 2038 | 2243 | 2425 |
| | 15 Thumb piece always active | 2215 × 1715A | 2030 | 2245 | Z42J |
| | (Devices with 2000C Series Trim are the same price) | | | | |
| 5 | LEVER/KNOB TRIM: | | | | |
| | 01 Exit only, cover plate | 2201 × 4901 | 1834 | 2039 | 2220 |
| | 02 Exit only, dummy trim | 2202 × 4902A | 2128 | 2333 | 2600 |
| | 03 Key retracts latchbolt | 2203 × 4903A | 2120 | 2333 | 2000 |
| a | 08 Key controls lever/knob | 2208 × 4908A | | | |
| Lever/Knob | 08 Key controls lever | 2208 × V4908A | 2238 | 2443 | 2711 |
| Trim: | 14 Lever/knob always active | 2214 × 4914A | | | |
| 3 | DEVICE ONLY: | | | | |
| | 01, 02, 03, 05, 08, 14, 15 | 22, 2201, 2202, 2203*, 2205, 2208, 2214, 2215 | 1689 | 1894 | 2051 |
| G | * 2203 Device × Cylinder Only Application includes Cylind | er Attachment Kit "CA-03" | | | |
| | E Elec. Device (see above) | E2203 × 4908A | 3027 | 3232 | 3500 |
| | FL Fire Rated Hardware Specify prefix "FL" (e.g. FL2103 |) Dogging option NOT availa | ble | | Add 173.00 |

Options

| PREFIX | (ADD TO DEVICE #) | ADD |
|--------|---|------|
| С | Pre-Terminated Quick Connect Plug ** | N/C |
| DE | Delayed Egress: REQUIRES PS161-6 Power Supply (pg. 32)* | 1555 |
| ELR | Electric Latch Retraction: REQUIRES ELR150 Series Power Supply (pg 23) | 809 |
| HC | Hurricane Code Device | 36 |
| LS | Latchbolt Monitoring Switch | 230 |
| Q | Wireless Access Management System | 470 |
| TDS | Touchbar Monitoring Double Switch | 280 |
| TS | Touchbar Monitoring Switch | 230 |
| WTDS | Weatherized Touchbar Monitoring Double Switch | 390 |
| WTS | Weatherized Touchbar Monitoring Switch | 312 |

- **NOTES:** UltraShield[™] Antimicrobial finish coating option available to Apex Exit Devices & Trims.
 - 630AM list price for Exit Devices Add 62.00
 - 630AM list price for Trims Add 25.00
 - Devices for Retrofit Applications prefix Trim with the letter "R" (e.g. R4908A).
 - Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.
 - Devices for 3'-0" door are furnished standard.
 - Devices for 2'-6" & 4'-0" doors are available at no extra charge.
 - Top Rod for 7'-0" high door is furnished standard.

| SUFFIX | (ADD TO DEVICE #) | ADD |
|-----------|--|-----|
| ALK | Exit Alarm: battery operated kit (9V battery included) | 557 |
| ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 |
| BRL | Braille Touchbar | 93 |
| CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 |
| DS | Door Position Monitoring Switch | 116 |
| LBR | Less Bottom Rod (no extra charge) | - |
| LD | Less Dogging | 36 |
| SEC | Security Screws | 48 |
| SNB | SNB Sex Nut and Bolt (10 req'd - not including rod guides) without Trim | 110 |
| SNB | SNB Sex Nut and Bolt (8 req'd - not including rod guides) LBR Device without Trim | 88 |
| SNB | SNB Sex Nut and Bolt (6 req'd - not including rod guides) with Trim | 66 |
| SNB | SNB Sex Nut and Bolt (4 req'd - not including rod guides) LBR Device with Trim | 44 |
| TMB | Transom Bracket | 58 |
| WALW | Weatherized Exit Alarm: remote power (24 VDC) | 725 |
| • Top Rod | for 8'-0" to 12'-0" high door is available at no extra | |

- charge. (See catalog for fire rating).
- * Rod and Latch Guards provided by others
- ** See Stanley Hinges & Door Accessories price book for Wire Harness product

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER:

Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.





2300 3R0 – Apex Mortise - Handed, Wide Stile

| | OUTSIDE FUNCTION | DEVICE × TRIM | 628 | 606, 612 613, 630 | 605 625 |
|------------|----------------------------------|---|------|----------------------|------------|
| | PULL TRIM: | | | | |
| Pull Trim: | 01 Exit only, cover plate | 2301 × 1701 | 1760 | 1967 | 2157 |
| | 02 Exit only, dummy trim | 2302 × 1702A | 1908 | 2115 | 2312 |
| 6 | 03 Key retracts latchbolt | 2303 × 1703A | 1906 | 2115 | 2512 |
| | 05 Key controls thumb piece | 2305 × M1705A | 2009 | 2215 | 2204 |
| | 15 Thumb piece always active | 2315 × M1715A | 2008 | 2215 | 2394 |
| | (Devices with M2000C Series | Trim are the same price) | | | |
| 5 | LEVER/KNOB TRIM: | | | | |
| | 01 Exit only, cover plate | 2301 × 4901 | 1804 | 2011 | 2189 |
| | 02 Exit only, dummy trim | 2302 × 4902A | 2098 | 2305 | 2569 |
| | 03 Key retracts latchbolt | 2303 × M4903A | 2098 | 2305 | 2009 |
| 0 | 08 Key controls lever/knob | 2308 × M4908A | | | |
| ever/Knob | 08 Key controls lever | 2308 × VM4908A | 2208 | 2415 | 2680 |
| Trim: | 14 Lever/knob always active | 2314 × M4914A | | | |
| () | 10 Inside key controls lever/kno | 2310 × M4908A | | | |
| 3 | Outside key retracts latchbol | 2310 × VM4908A | 2512 | 2720 | 3009 |
| | 10 Inside key controls lever/kno | 2310 × M4914A | | | |
| C | DEVICE ONLY: | | | | |
| | 01, 02, 03, 05, 08, 14, 15 | 2301, 2302, 2303*, 2305, 2308, 2314, 2315 | 1659 | 1866 | 2020 |
| | Elec. Device | E2303 × M4908A | 2020 | 2020 | 2201 |
| | E Electric Lock/Unlock Outside | Frim E2303 × VM4908A | 2829 | 3036 | 3301 |
| | FL Fire Rated Hardware Spec | fy prefix "FL" (eg FL2303) Dogging option NOT avail | able | | Add 173.00 |

Options

| _ | | |
|--------|--|------|
| PREFIX | (ADD TO DEVICE #) | ADD |
| С | Pre-Terminated Quick Connect Plug ** | N/C |
| DE | Delayed Egress: REQUIRES PS161-6 Power Supply (pg. 32) | 1555 |
| Ε | Electric Lock/Unlock with Lock/Unlock monitoring (see above) | - |
| ELR | Electric Latch Retraction: REQUIRES ELR150 Series Power Supply (pg. 32) | 809 |
| HC | Hurricane Code Device | 36 |
| LS | Latchbolt Monitoring Switch | 230 |
| TDS | Touchbar Monitoring Double Switch | 280 |
| TS | Touchbar Monitoring Switch | 230 |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 |
| | | |

| NOTES: | UltraShield[™] Antimicrobial finish coat Apex Exit Devices & Trims. | ing option available to |
|--------|--|-------------------------|
| | - 630AM list price for Exit Devices | Add 62.00 |
| | - 630AM list price for Trims | Add 25.00 |

| SUFFIX (| (ADD TO DEVICE #) | ADD |
|----------|--|-----|
| ALK E | Exit Alarm: battery operated kit (9V battery included) | 557 |
| ALW E | Exit Alarm: remote power kit (12 or 24 VDC) | 557 |
| BRL | Braille Touchbar | 93 |
| CD (| Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 |
| DS [| Door Position Monitoring Switch | 116 |
| LD l | Less Dogging | 36 |
| SEC S | Security Screws | 48 |
| SNB S | Sex Nut and Bolt (6 req'd) without Trim | 66 |
| SNB S | Sex Nut and Bolt (2 req'd) with Trim | 22 |
| WALW \ | Weatherized Exit Alarm: remote power (24 VDC) | 725 |

- Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.
- Devices for 3'-0" door are furnished standard.
- For mortise lock body ONLY see page 29.
- For 2'-6" & 4'-0" doors are available at no extra charge.
- ** See Stanley Hinges & Door Accessories price book for Wire Harness product

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER:

10

Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



2400 3R0 – Apex Rim - Non Handed, Narrow Stile

| | OUTSIDE FUNCTION | DEVICE × TRIM | 628 | 606, 612 613, 630 | 605 625 |
|------------|--|--|------|----------------------|------------|
| | PULL TRIM: | | | | |
| Pull Trim: | 01 Exit only, cover plate | 2401 × 2001 | 1424 | 1626 | 1810 |
| | 02 Exit only, dummy trim | 2402 × 2002C | 1572 | 1774 | 1965 |
| - | 03 Key retracts latchbolt | 2403 × 2003C | 1572 | 1774 | 1905 |
| | LEVER TRIM: | | | | |
| | 01 Exit only, cover plate | 2401 × 2901 | 1468 | 1670 | 1842 |
| - | 02 Exit only, dummy trim | 2402 × 2902A | 1762 | 1964 | 2222 |
| 5 | 03 Key retracts latchbolt | 2403 × 2903A | 1702 | 1904 | 2222 |
| | 08 Key controls lever | 2408 × 2908A | 1872 | 2074 | 2333 |
| | 14 Lever always active | 2414 × 2914A | 1072 | 2074 | 2333 |
| | DEVICE ONLY: | | | | |
| Lever/Knob | 01, 02, 03, 08, 14 | 2401, 2402, 2403*, 2408, 2414 | 1323 | 1525 | 1673 |
| Trim: | * 2403 Device × Cylinder Only Application incl | udes Cylinder Attachment Kit "NCA-03". | | | |
| | FL Fire Rated Hardware Specify prefix "FL" (e | g FL2403) Dogging option NOT availab | ole | | Add 173.00 |

Options

| PREFIX | (ADD TO DEVICE #) | ADD |
|--------|--|------|
| С | Pre-Terminated Quick Connect Plug ** | N/C |
| DE | Delayed Egress: REQUIRES PS161-6 Power Supply (pg. 32) | 1555 |
| ELR | Electric Latch Retraction: REQUIRES ELR150 Series Power Supply (pg. 32) | 809 |
| TDS | Touchbar Monitoring Double Switch | 280 |
| TS | Touchbar Monitoring Switch | 230 |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 |

NOTES: • UltraShield[™] Antimicrobial finish coating option available to Apex Exit Devices & Trims.

- 630AM list price for Exit Devices Add 62.00
- 630AM list price for Trims Add 25.00
- Devices are priced less cylinders. If cylinder is required please see cylinders on pq. 30.

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|--|-----|
| ALK | Exit Alarm: battery operated kit (9V battery included) | 557 |
| ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 |
| BRL | Braille Touchbar | 93 |
| CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 |
| DS | Door Position Monitoring Switch | 116 |
| LD | Less Dogging | 36 |
| SEC | Security Screws | 48 |
| SNB | SNB Sex Nut and Bolt (4 req'd) without Trim | 44 |
| SNB | SNB Sex Nut and Bolt (2 req'd) with Trim | 22 |
| WALW | Weatherized Exit Alarm: remote power (24 VDC) | 725 |

- 2403 × 2903A Device uses Rim Cylinder, 2408 × 2908A Device uses Mortise Cylinder.
- Devices for 3'-0" door are furnished standard.
- Devices for 4'-0" doors are available at no extra charge.
- ** See Stanley Hinges & Door Accessories price book for Wire Harness product

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER: Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



2600 3R0 – Apex Concealed Vertical Rod - Non Handed, Narrow Stile

Pull Trim:

| |) | |
|---|---|--|
| | | |
| 9 | | |

| ουτς | IDE FUNCTION | DEVICE × TRIM | 628 | 606, 612 613, 630 | 605 625 | |
|-------------|--|----------------------------------|------|----------------------|------------|--|
| LEVER TRIM: | | | | | | |
| 01 | Exit only, cover plate | 2601 × 2901 | 2095 | 2310 | 2495 | |
| 02 | Exit only, dummy trim | 2602 × 2902A | 2389 | 2604 | 2875 | |
| 03 | Key retracts latchbolt | 2603 × 2903A | | | | |
| 08 | Key controls lever | 2608 × 2908A | 2499 | 2714 | 2986 | |
| 14 | Lever always active | 2614 × 2914A | 2433 | 2714 | 2300 | |
| DEV | ICE ONLY: | | | | | |
| | 01, 02, 03, 08, 14 | 2601, 2602, 2603*, 2608, 2614 | 1950 | 2165 | 2326 | |
| | *2603 Device × Cylinder Only Application includes Cylinder | Attachment Kit "NCA-03" | | | | |
| | | | | | | |

| FL Fire Rated Hardware Specify prefix "FL" (e.g. FL2603) Dogging option NOT available A | Add 173.00 |
|---|------------|
|---|------------|

Options

| PREFIX | (ADD TO DEVICE #) | ADD |
|--------|--|------|
| С | Pre-Terminated Quick Connect Plug ** | N/C |
| DE | Delayed Egress: REQUIRES PS161-6 Power Supply (pg. 32) | 1555 |
| ELR | Electric Latch Retraction: REQUIRES ELR150 Series Power Supply (pg. 32) | 809 |
| TDS | Touchbar Monitoring Double Switch | 280 |
| TS | Touchbar Monitoring Switch | 230 |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 |

NOTES: • UltraShield[™] Antimicrobial finish coating option available to Apex Exit Devices & Trims.

| - 630AM list price for Exit Devices | Add 62.00 |
|-------------------------------------|-----------|
| - 630AM list price for Trims | Add 25.00 |

- Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.
- 2603 × 2903A Device uses Rim Cylinder, 2608 × 2908A Device uses Mortise Cylinder.

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|--|-----|
| ALK | Exit Alarm: battery operated kit (9V battery included) | 557 |
| ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 |
| BRL | Braille Touchbar | 93 |
| CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 |
| DS | Door Position Monitoring Switch | 116 |
| LBR | Less Bottom Rod (no extra charge) | - |
| LD | Less Dogging | 36 |
| SEC | Security Screws | 48 |
| SNB | SNB Sex Nut and Bolt (4 req'd) without Trim | 44 |
| SNB | SNB Sex Nut and Bolt (2 req'd) with Trim | 22 |
| WALW | Weatherized Exit Alarm: remote power (24 VDC) | 725 |

- Devices for 3'-0" door are furnished standard.
- Devices for 2'-6" & 4'-0" doors are available at no extra charge.
- Top Rod for 6'-8" to 8'-0" high door is furnished standard.
- Top Rod for 8'-0" to 10'-0" high door is available at no extra charge. (See catalog for fire rating).
- ** See Stanley Hinges & Door Accessories price book for Wire Harness product

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER:

Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



3R0 – Apex Wood Door Concealed Vertical Rod - Reversible, Wide Stile

-

| | OUTS | | DEVICE × TRIM | 628 | 606, 612 613, 630 | 605 625 |
|------------|------|---|-------------------------------------|-------|----------------------|------------|
| | PUL | L TRIM: | | | | |
| Pull Trim: | 01 | Exit only, cover plate | 2701 × 1701 | 2191 | 2406 | 2613 |
| | 02 | Exit only, dummy trim | 2702 × 1702A | 2220 | 2554 | 2760 |
| | 03 | Key retracts latchbolt | 2703 × 1703A | 2339 | 2554 | 2768 |
| | 05 | Key controls thumb piece | 2705 × 1705A | 2420 | 2654 | 2050 |
| | 15 | Thumb piece always active | 2715 × 1715A | 2439 | 2654 | 2850 |
| 5 | LEV | ER/KNOB TRIM: | | | | |
| | 01 | Exit only, cover plate | 2701 × 4901 | 2235 | 2450 | 2645 |
| | 02 | Exit only, dummy trim | 2702 × 4902A | 2255 | 2450 | 2045 |
| | 03 | Key retracts latchbolt | 2703 × 4903A | 2529 | 2744 | 3025 |
| a | 08 | Key controls lever/knob | 2708 × 4908A | 2329 | 2744 | 5025 |
| Lever/Knob | 08 | Key controls lever | 2708 × V4908A | 2639 | 2854 | 3136 |
| Trim: | 14 | Lever/knob always active | 2714 × 4914A | | | |
| 9 | DEV | /ICE ONLY: | | | | |
| | | 01, 02, 03, 05, 08, 14, 15 | 2701, 2702, 2705, | 2090 | 2305 | 2476 |
| | | 01, 02, 03, 03, 06, 14, 15 | 2708, 2714, 2715 | | | |
| | | Flag Davies | F2702 4000 A | | | |
| | E | Elec. Device | E2703 × 4908A | 3428 | 3643 | 3925 |
| | | Electric Lock/Unlock Outside Trim | E2703 × V4908A | | | |
| | FL | Fire Rated Hardware Specify prefix "FL" (e. | g. FL2703) Dogging option NOT avail | lable | | Add 173.00 |

Options

| PREFIX | (ADD TO DEVICE #) | ADD |
|--------|--|------|
| С | Pre-Terminated Quick Connect Plug ** | N/C |
| DE | Delayed Egress: REQUIRES PS161-6 Power Supply (pg. 32) | 1555 |
| ELR | Electric Latch Retraction: REQUIRES ELR150 Series Power Supply (pg. 32) | 809 |
| LS | Latchbolt Monitoring Switch | 230 |
| Q | Wireless Access Management System | 470 |
| TDS | Touchbar Monitoring Double Switch | 280 |
| TS | Touchbar Monitoring Switch | 230 |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 |

2700

- NOTES: UltraShield[™] Antimicrobial finish coating option available to Apex Exit Devices & Trims.
 - 630AM list price for Exit Devices Add 62.00
 - 630AM list price for Trims Add 25.00
 - Devices for Retrofit Applications prefix Trim with the letter "R" (e.g. R4908A).
 - Devices are priced less cylinders. If cylinder is required please see cylinders on page 30.

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|--|-----|
| ALK | Exit Alarm: battery operated kit (9V battery included) | 557 |
| ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 |
| BRL | Braille Touchbar | 93 |
| CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 |
| DS | Door Position Monitoring Switch | 116 |
| LBR | Less Bottom Rod (no extra charge) | - |
| LD | Less Dogging | 36 |
| SEC | Security Screws | 48 |
| SNB | SNB Sex Nut and Bolt (6 req'd) without Trim | 66 |
| SNB | SNB Sex Nut and Bolt (2 req'd) with Trim | 22 |
| WALW | Weatherized Exit Alarm: remote power (24 VDC) | 725 |

- Devices for 3'-0" door are furnished standard.
- Devices for 2'-6" & 4'-0" doors are available at no extra charge.
- Top Rod for 6'-8" to 8'-0" high door is furnished standard.
- Top Rod for 8'-1" to 10'-0" high door is available at no extra charge. (See catalog for fire rating).
- ** See Stanley Hinges & Door Accessories price book for Wire Harness product

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER: Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



2800

3R0 – Apex Concealed Vertical Rod - Reversible, Wide Stile

-

| | | | | | 606 642 | 605 |
|------------|----------|--|--|------|----------------------|------------|
| | OUT | SIDE FUNCTION | DEVICE × TRIM | 628 | 606, 612 613, 630 | 605 625 |
| | PUI | L TRIM: | | | | |
| ull Trim: | 01 | Exit only, cover plate | 2801 × 1701 | 1938 | 2150 | 2347 |
| | 02 03 | Exit only, dummy trim Key retracts latchbolt | 2802 × C1702A 2803 × C1703A | 2086 | 2298 | 2502 |
| 3 | 05 15 | Key controls thumb piece | 2805 × C1705A 2815 × C1715A | 2186 | 2398 | 2584 |
| | LE\ | /ER/KNOB TRIM: | | | | |
| - | 01 | Exit only, cover plate | 2801 × 4901 | 1982 | 2194 | 2379 |
| | 02 03 | Exit only, dummy trim Key retracts latchbolt | 2802 × 4902A 2803 × 4903A | 2276 | 2488 | 2759 |
| | 08 08 | Key controls lever/knob Key controls lever | 2808 × 4908A 2808 × V4908A | 2386 | 2598 | 2870 |
| ver/Knob | 14 | Lever/knob always active | 2814 × 4914A | | | |
| Trim: | CAS | ST PLATE: | | | | |
| 3 | 03 | Key Retracts Latch Bolt (pull by others) | 2803 × C03 | 2020 | 2232 | 2393 |
| | DE | VICE ONLY: | | | | |
| | | 01, 02, 03, 05, 08, 14, 15 | 2801,2802,2803*, 2805, 2808, 2814, 2810 | 1837 | 2049 | 2210 |
| | | *2803 Device x Cylinder Only Application requires C03 Tr | im, see page 20 | | | |
| ast Plate: | E | Elec. Device Electric Lock/Unlock Outside Trim | E2803 x 4908A E2803 x V4908A | 3175 | 3387 | 3659 |
| 3 | | | | | | |
| 9 | FL | Fire Rated Hardware Specify prefix "FI" (e.g. FI 2803 | R) Dogging option NOT availa | hle | | Add 173 0 |

FL Fire Rated Hardware Specify prefix "FL" (e.g. FL2803) Dogging option NOT available

Add 173.00

Options

| PREFIX | (ADD TO DEVICE #) | ADD | |
|--|--|---------|--|
| С | Pre-Terminated Quick Connect Plug ** | | |
| DE | E Delayed Egress: REQUIRES PS161-6 Power Supply (pg. 32) | | |
| ELR Electric Latch Retraction: REQUIRES ELR150 Series Power Supply (pg. 32) | | | |
| HC | Hurricane Code Device | 36 | |
| LS | Latchbolt Monitoring Switch | 230 | |
| TDS | Touchbar Monitoring Double Switch | 280 | |
| TS | Touchbar Monitoring Switch | 230 | |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 | |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 | |
| NOTES: | UltraShield[™] Antimicrobial finish coating option avail Apex Exit Devices & Trims. | able to | |
| | - 630AM list price for Exit Devices Add 62.0 | 0 | |
| | - 630AM list price for Trims Add 25.0 | 0 | |
| Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30. | | | |
| | Devices for 3'-0" door are furnished standard. | | |

| SUFFIX | (ADD TO DEVICE #) | ADD | | |
|---|--|-----|--|--|
| ALK | Exit Alarm: battery operated kit (9V battery included) | 557 | | |
| ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 | | |
| BRL | Braille Touchbar | 93 | | |
| CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 | | |
| DS | Door Position Monitoring Switch | 116 | | |
| LBR | Less Bottom Rod (no extra charge) | - | | |
| LD | Less Dogging | 36 | | |
| SEC | Security Screws | 48 | | |
| SNB | SNB Sex Nut and Bolt (6 req'd) without Trim | 66 | | |
| SNB | SNB Sex Nut and Bolt (2 req'd) with Trim | 22 | | |
| WALW | Weatherized Exit Alarm: remote power (24 VDC) | 725 | | |
| • Devices for 2'-6" & 4'-0" doors are available at no extra charge. | | | | |

- \bullet Top Rod for 6'-8" to 8'-0" high door is furnished standard.
- Top Rod for 8'-1" to 10'-0" high door is available at no extra charge. (See catalog for fire rating).
- ** See Stanley Hinges & Door Accessories price book for Wire Harness product

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER:


Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



2900/4900 Series Trims

Decorative Levers list price

\$97 PER TRIM (ONE LEVER)

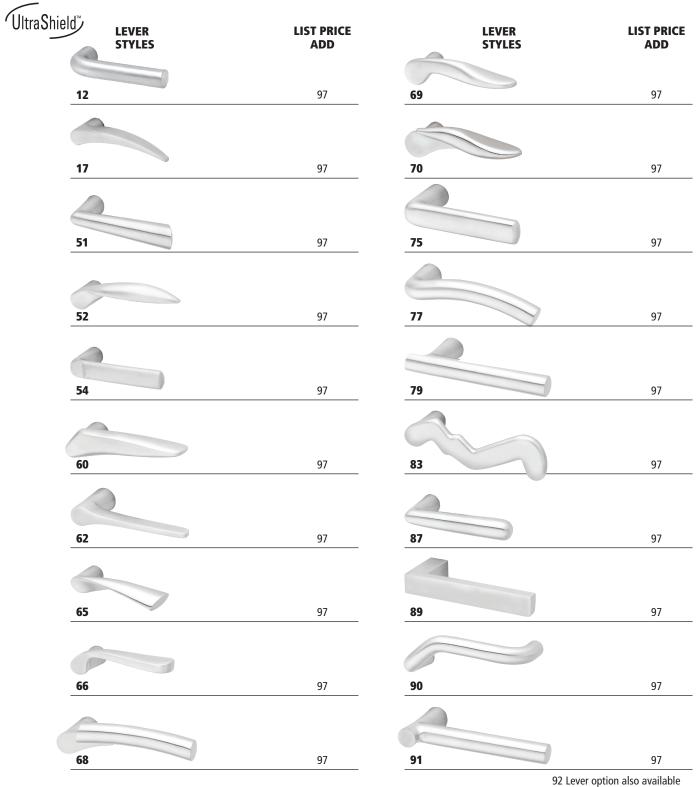



Specify: Device No. with options x Trim x Hand x Finish x Door Width, Height and Thickness.



5100 4R0 – Reliant Rim - Non Handed

| | OUTSIDE FUNCTION | DEVICE × TRIM | 689 695 | TRIM ONLY | 689 695 |
|-----------|--|----------------------------------|-------------------|-----------|---|
| Plate | PLATE: | | | | |
| | 01 Exit only, cover plate | 5101 × 501 | 501 | 501 | 49 |
| | PULL TRIM: | | | | |
| | 02 Exit only, dummy trim | 5102 × 602 | 517 | 602 | 65 |
| | 03 Key retracts latchbolt | 5103 × 603 | 717 | 603 | 05 |
| Pull Trim | 02 Exit only, dummy trim | 5102 × 702A | 566 | 702A | 11/ |
| | 03 Key retracts latchbolt | 5103 × 703A | 000 | 703A | 114 |
| - | LEVER TRIM: | | | | |
| 3 | 08 Key controls lever | 5108 × 808A | 707 | 808A | 255 |
| | 14 Lever always active | 5114 × 814A | 707 | 814A | 233 |
| | DEVICE ONLY: | | | | |
| | 01, 02, 03, 08, 14 | 5101, 5102, 5103*, 5108, 5114 | 452 | - | - |
| 0 | *5103 Device × Cylinder Only Application inclu | ıdes Cylinder Attachment | Kit "CA-03" | | 49 65 114 255 - Add 173.00 |
| - | FL Fire Rated Hardware Specify prefix "FL" (e | .g. FL5103) Dogging op | tion NOT availabl | e | Add 173.00 |

Lever Trim



Options

| PREFIX | (ADD TO DEVICE #) | ADD |
|--------|--|-----|
| TDS | Touchbar Monitoring Double Switch | 280 |
| TS | Touchbar Monitoring Switch | 230 |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 |

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|---|-----|
| ALK | Exit Alarm: battery operated kit (9V battery included) | 557 |
| ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 |
| CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 |
| LD | Less Dogging | 36 |
| SNB | SNB Sex Nut and Bolt (4 req'd) without Trim | 44 |
| SNB | SNB Sex Nut and Bolt (2 req'd) with Trim | 22 |
| WALW | Weatherized Exit Alarm: remote power (12 or 24 VDC) | 725 |

NOTES: • Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.

• Devices for 3'-0" door are furnished standard.

- Weatherized Exit Alarm: remote power (24 VDC)
- Devices for 4'-0" doors are available at no extra change.
- 603 and 703 Trims use a Rim Cylinder, 808A Trims use a Mortise Cylinder.
- Factory cutting of custom sixes for Reliant series exit devices not available.

TO ORDER:

• Factory cutting of custom sixes for Reliant series exit devices not available.



5200

4R0 – Reliant Surface Vertical Rod - Reversible

Plate





3

| OUTS | SIDE FUNCTION | DEVICE × TRIM | 689 695 | TRIM ONLY | 689 695 |
|------|--------------------------------------|--------------------------------------|-------------|-----------|---------|
| PLA | TE: | | | | |
| 01 | Exit only, cover plate | 5201 × 501 | 827 | 501 | 49 |
| PUL | L TRIM: | | | | |
| 02 | Exit only, dummy trim | 5202 × 602 | 843 | 602 | 65 |
| 03 | Key retracts latchbolt | 5203 × 603 | 045 | 603 | CO |
| 02 | Exit only, dummy trim | 5202 × 702A | 892 | 702A | 114 |
| 03 | Key retracts latchbolt | 5203 × 703A | 092 | 703A | 114 |
| LEV | 'ER TRIM: | | | | |
| 08 | Key controls lever | 5208 × 808A | 1,033 | 808A | 255 |
| 14 | Lever always active | 5214 × 814A | 1,055 | 814A | 233 |
| DE\ | /ICE ONLY: | | | | |
| | 01, 02, 03, 08, 14 | 5201, 5202, 5203*, 5208, 5214 | 778 | - | - |
| | *5203 Device × Cylinder Only Applica | ation includes Cylinder Attachment I | Kit "CA-03" | | |

FL Fire Rated Hardware Specify prefix "FL" (e.g. FL5103) Dogging option NOT available

Add 173.00

Lever Trim



Options

| PREFIX | (ADD TO DEVICE #) | ADD |
|--------|--|-----|
| TDS | Touchbar Monitoring Double Switch | 280 |
| TS | Touchbar Monitoring Switch | 230 |
| WTDS | WeatherizedTouchbar Monitoring Double Switch | 390 |
| WTS | Weatherized Touchbar MonitoringSwitch | 312 |

- **NOTES:** Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.
 - Devices for 3'-0" door are furnished standard.
 - Devices for 4'-0" doors are available at no extra charge.
 - 603 and 703 Trims use a Rim Cylinder, 808A Trims use a Mortise Cylinder
 - Top Rod for 7'-0" high door is furnished standard.
 - Top Rod for 8'-0" to 10'-0" high door is available at no extra charge. (See catalog for fire rating).
 - Factory cutting of custom sixes for Reliant series exit devices not available.

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|--|-----|
| ALK | Exit Alarm: battery operated kit (9V battery included) | 557 |
| ALW | Exit Alarm: remote power kit (12 or 24 VDC) | 557 |
| CD | Cylinder Dogging: 1-1/4" Mortise Cylinder not included | 83 |
| LBR | Less Bottom Rod (no extra charge) | 0 |
| LD | Less Dogging | 36 |
| SNB | SNB Sex Nut and Bolt (8 req'd - not including rod guides) without Trim | 88 |
| SNB | SNB Sex Nut and Bolt (6 req'd - not including rod guides) LBR Device w/o Trim. | 66 |
| SNB | SNB Sex Nut and Bolt (6 req'd - not including rod guides) with Trim | 66 |
| SNB | SNB Sex Nut and Bolt (4 req'd - not including rod guides) LBR Device with Trim | 44 |
| WALW | Weatherized Exit Alarm: remote power (24 VDC) | 725 |
| | | |

• Factory cutting of custom sixes for Reliant series exit devices not available.





100

5R0 – Olympian Rim - 100 Handed, R100 Reversible, Crossbar



| | OUTSIDE FUNCTION | DEVICE × TRIM | 606, 612 613, 630 | 605 625 |
|------------|--|------------------------------------|----------------------|------------|
| Pull Trim: | PULL TRIM: | | | |
| | 01 Exit only, cover plate | 101, R101 × 1701 | 1499 | 1679 |
| | 02 Exit only, dummy trim | 102, R102 × 1702A | 1647 | 1834 |
| | 03 Key retracts latchbolt | 103, R103 × 1703A | 1047 | 1054 |
| | 05 Key controls thumb piece | 105, R105 × Y1705A | 1747 | 1916 |
| F | 15 Thumb piece always active | 115, R115 × Y1715A | 1747 | 1510 |
| | (Devices with 2000C Series Trim are the same price) | | | |
| | LEVER/KNOB TRIM: | | | |
| | 01 Exit only, cover plate | 101, R101 × 4901 | 1543 | 1711 |
| 8 | 02 Exit only, dummy trim | 102, R102 × 4902A | 1837 | 2091 |
| | 03 Key retracts latchbolt | 103, R103 × 4903A | 1057 | 2051 |
| | 08 Key controls lever/knob | 108, R108 × Y4908A | | |
| Lever/Knob | 08 Key controls lever | 108, R108 × VY4908A | 1947 | 2202 |
| Trim: | 14 Lever/knob always active | 114, R114 × Y4914A | | |
| 3 | DEVICE ONLY: | | | |
| (E) | | 101, R101, 102, R102, | | |
| | 01, 02, 03, 05, 08, 14, 15 | 103*, R103*, 105, R105, | 1398 | 1542 |
| | 01, 02, 03, 03, 00, 14, 13 | 108, R108, 114, R114, | | |
| | | 115, R115 | | |
| | *103 or R103 Device × Cylinder Only Application includes (| Cylinder Attachment Kit "CA-03" | | |
| | FL Fire Rated Hardware Specify prefix "FL" (e.g. FL | .103) Dogging option NOT available | e | Add 173.00 |

Options

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|---|-----|
| CBR | Reinforced Crossbar | 52 |
| LD | Less Dogging | 36 |
| SEC | Security Screws (crossbar arm screws are hex socket head) | 48 |
| SNB | SNB Sex Nut and Bolt (8 req'd) without Trim | 88 |
| SNB | SNB Sex Nut and Bolt (4 req'd) with Trim | 44 |

NOTES: • Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.

- Devices for 3'-0" door are furnished standard.
- Devices for 4'-0" doors are available at no extra charge.
- Trim No. with prefix "Y" is for Olympian Device only.

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER: Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



5R0 – Olympian Surface Vertical Rod - Non Handed, Crossbar 200



Pull Trim:

| (| |) | |
|---|---|---|--|
| 3 | - | | |
| | | | |
| U | 2 | | |

lover/Knob n:

| Lever | /Knob Trim: |
|-------|----------------|
| 3 | |
| | |

| OUT | SIDE FUNCTION | DEVICE × TRIM | 606, 612 613, 630 | 605 625 |
|-----|--|---------------------------------------|----------------------|------------|
| PUL | L TRIM: | | | |
| 01 | Exit only, cover plate | 201 × 1701 | 2048 | 2242 |
| 02 | Exit only, dummy trim | 202 × 1702A | 2196 | 2397 |
| 03 | Key retracts latchbolt | 203 × 1703A | 2190 | 2597 |
| 05 | Key controls thumb piece | 205 × Y1705A | 2296 | 2479 |
| 15 | Thumb piece always active | 215 × Y1715A | 2290 | 2479 |
| | (Devices with 2000C Series Trim are the same price) | | | |
| LEV | ER/KNOB TRIM: | | | |
| 01 | Exit only, cover plate | 201 × 4901 | 2092 | 2274 |
| 02 | Exit only, dummy trim | 202 × 4902A | 2386 | 2654 |
| 03 | Key retracts latchbolt | 203 × 4903A | 2500 | 2004 |
| 08 | Key controls lever/knob | 208 × Y4908A | | |
| 08 | Key controls lever | 208 × VY4908A | 2496 | 2765 |
| 14 | Lever/knob always active | 214 × Y4914A | | |
| DE\ | /ICE ONLY: | | | |
| | 01, 02, 03, 05, 08, 14, 15 | 201, 202, 203*, 205, 208, 214, 215 | 1947 | 2105 |
| | *203 Device \times Cylinder Only Application includes Cylinder | Attachment Kit "CA-03" | | |

FL Fire Rated Hardware Specify prefix "FL" (e.g. FL203) Dogging option NOT available

Add 173.00

Options

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|--|-----|
| CBR | Reinforced Crossbar | 52 |
| LBR | Less Bottom Rod (no extra charge) | - |
| LD | Less Dogging | 36 |
| SEC | Security Screws (crossbar arm screws are hex socket head) | 48 |
| SNB | • SNB Sex Nut and Bolt (12 req'd - not including rod guides) without Trim | 132 |
| SNB | SNB Sex Nut and Bolt (10 req'd - not including rod guides) LBR Device without Trim | 110 |
| SNB | SNB Sex Nut and Bolt (8 req'd - not including rod guides) with Trim | 88 |
| SNB | SNB Sex Nut and Bolt (6 req'd - not including rod guides) LBR Device with Trim | 66 |
| TMB | Transom Bracket | 58 |

- NOTES: Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.
 - Devices for 3'-0" door are furnished standard.
 - Devices for 4'-0" doors are available at no extra charge.
 - Top Rod for 7'-0" high door is furnished standard.
 - Top Rod for 8'-0" to 12'-0" high door is available at no extra charge. (See catalog for fire rating).
 - Trim No. with prefix "Y" is for Olympian Device only.

SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER: Specify: Device No. with options × Trim × Hand × Finish × Door Width, Height and Thickness.



5R0 – Olympian Mortise - Handed, Crossbar



300



| | OUT | SIDE FUNCTION | DEVICE × TRIM | 606, 612 613, 630 | 605 625 |
|---------|----------|--|--------------------------------------|----------------------|------------|
| Trim: | PUL | L TRIM: | | | |
| | 01 | Exit only, cover plate | 301 × 1701 | 2018 | 2213 |
|) | 02 03 | Exit only, dummy trim Key retracts latchbolt | 302 × 1702A 303 × 1703A | 2166 | 2368 |
| | 05 15 | Key controls thumb piece Thumb piece always active | 305 × M1705A 315 × M1715A | 2266 | 2450 |
| | LEV | (Devices with M2000C Series Trim are the same price) /ER/KNOB TRIM: | | _ | |
| | 01 | Exit only, cover plate | 301 × 4901 | 2062 | 2245 |
| | 02 03 | Exit only, dummy trim Key retracts latchbolt | 302 × 4902A 303 × M4903A | 2356 | 2625 |
| er/Knob | 08 08 | Key controls lever/knob Key controls lever | 308 × M4908A 308 × VM4908A | 2466 | 2736 |
| Trim: | 14 | Lever/knob always active | 314 × M4914A | 2400 | 2750 |
|) | DE | /ICE ONLY: 01, 02, 03, 05, 08, 14, 15 | 301, 302, 303, 305, 308, 314, 315 | 1917 | 2076 |
| | FL | Fire Rated Hardware Specify prefix "FL" (eg FL203) | Dogging option NOT availa | ble | Add 173.00 |

Options

| SUFFIX | (ADD TO DEVICE #) | ADD |
|--------|---|-----|
| CBR | Reinforced Crossbar | 52 |
| LD | Less Dogging | 36 |
| SEC | Security Screws (crossbar arm screws are hex socket head) | 48 |
| SNB | SNB Sex Nut and Bolt (8 req'd) without Trim | 88 |
| SNB | SNB Sex Nut and Bolt (4 req'd) with Trim | 44 |

• Devices for 4'-0" doors are available at no extra charge

NOTES: • Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 30.

- For mortise lock body ONLY see pg. 30.
- Devices for 3'-0" door are furnished standard
- SPLIT FINISHES: When split finish is specified, the finish listed first is for outside trim. To obtain proper list price, add "Device Only" price to appropriate "Trim" price.

TO ORDER: Specify: Device No with options × Trim × Hand × Finish × Door Width, Height and Thickness



7R0 – Arm-A-Dor® – Security Exit Hardware



COMPLETE PRODUCT ASSEMBLIES

| PRODUCT NUMBER | DESCRIPTION | ALARM | FITS DOOR WIDTHS | FITS JAMBS UP TO | US28/628 |
|-------------------|----------------------|-------|------------------|------------------|----------|
| A101-001 | Automatic Relock | No | 3' TO 4' | 6 3/4″ | 1207 |
| A101-002 | Automatic Relock | Yes* | 3' TO 4' | 6 3/4″ | 1347 |
| A101-012 | Automatic Relock | No | 3' ONLY | 5 1/4" - 5 3/4" | 1064 |
| A101-013 | Automatic Relock | Yes* | 3' ONLY | 5 1/4" - 5 3/4" | 1207 |
| A101-014 | Automatic Relock | No | 4' ONLY | 5 1/4" - 5 3/4" | 1163 |
| A101-015 | Automatic Relock | Yes* | 4' ONLY | 5 1/4" - 5 3/4" | 1304 |
| A102-001 | Manual Relock | No | 3' TO 4' | 6 3/4″ | 1163 |
| A102-002 | Manual Relock | Yes* | 3' TO 4' | 6 3/4″ | 1304 |
| A101-F01 | Automatic-Fire Rated | No | 3' TO 4' | 6 3/4″ | 1347 |
| A101-F02 | Automatic-Fire Rated | Yes* | 3' TO 4' | 6 3/4″ | 1487 |

* ALARM MODELS A101-002, A101-013, and A101-F02 require two 9 volt batteries (INCLUDED) and a

Standard 1-1/8" mortise cylinder (NOT INCLUDED)

| OPTIONA | L KITS: (A/C ADAPTER, ALARM, DOUBLE DOOR, LOW PROFILE) | |
|---------------|---|-----|
| KIT NUMBER | DESCRIPTION | |
| A103-002 | Switch - For wiring to existing system (one individual kit) | 62 |
| 4103-003 | Alarm Sub - Assembly | 550 |
| 4104-001 | Low Profile Installation Kit - For door jambs greater than 6 3/4" | 164 |
| 106-001 | Standard Double Door Kit - For all models | 245 |
| 106-002 | Low Profile Installation Kit - For jamb depths greater than 6 3/4" | 262 |
| 107-001 | A/C Adapter Kit - For plug in battery back-up | 280 |
| 107-002 | A/C Adapter Hard Wire Kit - Wiring to electrical system w/battery back-up | 386 |
| DROP SHIP | Drop Ship Fee For Items Shipped Under \$300 | 62 |


| DEADBOLTS (REQUIRED) FOR DOUBLE DOOR APPLICATIONS: | | | | |
|--|--|-----|--|--|
| MODEL | DESCRIPTION | | | |
| 1881-003 | Sliding Deadbolt w/Padlock locking Hasp & Strike | 175 | | |
| 1883-003 | Sliding Deadbolt Keylocking with Strike | 200 | | |

NOTES: • Prepaid Freight on all shipments of 30 or more units.

• Express Program (ship within 48 hours) available for up to 10 units for extra 20% limited to models A101-002, 101-013, A101-015.

TO ORDER: Specify: 7R–A101-001 × US28/628.

Trim - Apex Wide & Narrow Stile, Olympian

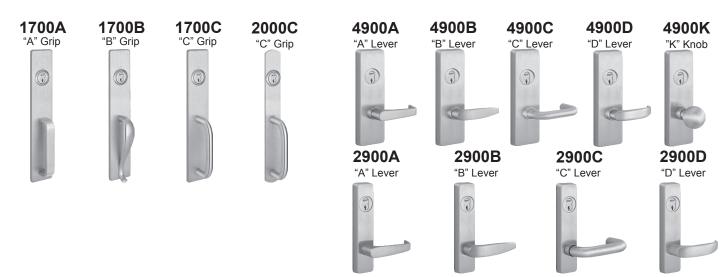

| TRIM NUMBER | 606, 612, 613, 630 | 605, 625 |
|---|-----------------------|----------|
| 1701, R1701, 2001 (cover plate) | 101 | 137 |
| 1702A, R1702A, 1703A, R1703A, C1702A, C1703A, 2002C, 2003C | 249 | 292 |
| 1705A, R1705A, 1715A, R1715A, C1705A, C1715A, Y1705A, Y1715A, M1705A, M1715A, RM1705A, RM1715A, 2005C, 2015C, Y2005C, Y2015C, M2005C, M2015C | 349 | 374 |

• 630 Trim furnished for 628 Devices. Grip Style "A" and "B" are furnished 626 for 630 Trim.

C03


- Cast Plate "Pull by others"
- Specify No. C03 Cylinder Attachment Trim for 2803 Device when Pull by Others is specified.
 - Available in 605, 606, 612, 613, 625 and 626 finishes.
 - Add \$183.00 to the price of the device.

| TRIM NUMBER | 613, 630 | 605, 625 |
|--|------------|----------|
| 4901, R4901, 2901 (cover plate) | 145 | 169 |
| 4902A, R4902A, 4903A, R4903A, M4903A, RM4903A, 2902A, 2903A | 439 | 549 - |
| 4908A, R4908A, 4914A, R4914A, Y4908A, Y4914A, M4908A M4914A, RM4908A, RM4914A, 2908A, 2914A | , 549 - | 660 - |
| V4908A, RV4908A, VM4908A, VY4908A, RVM4908A | 549 | 660 |

606, 612

• Lever Trims are shipped handed. Specify Hand.

- 626 Trim is furnished for 628 and 630 Devices.
- 2900 Series Trims are available for Apex Narrow Stile only.
- Knurled Knob/Lever, Grip "KNR" add \$83.00

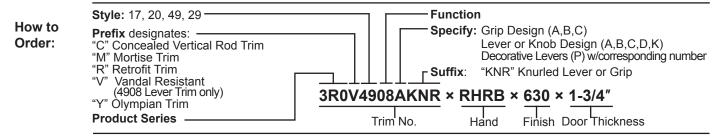

- NOTES: UltraShield[™] Antimicrobial finish coating option available to Apex Trims. 2900 Series T rim Rim Type Cylinder for "03" function and Mortise - 630AM list price for Trims
 - For pricing on trims for the 5100 and 5200 series devices, see pages 22 and 23.
 - Devices are priced less cylinders. If cylinder is required please see cylinders on pg. 29.
 - Trims with "M" prefix require 1-1/4" Mortise Type Cylinder on page 30.
- Type Cylinder for "08" function, not furnished standard. Use 1-1/4" long standard Mortise Cylinder . Specify when required.
- All other Trims require Rim Type Cylinder .
- Trim No. with prefix "Y" is for Olympian Device only.
- No extra charge for different Lever or Grip styles. A Lever/Grip Standard.



Mullions and Strikes

| DESCRIPTION | I | PRODUCT NO. | PRIMER 600 | ALUMINUM 689 OR DARK BRONZE 695 |
|--------------------|---|---------------------------|-----------------|------------------------------------|
| Complete Mull | ion Assemblies | | | |
| REMOVABLE | E MULLION - 2" × 2" × 8'-0" | | | |
| Standard | | 811 | 475 | 560 |
| REMOVABL | E MULLION - 2" × 3" × 8'-0" | | | |
| Standard | | 822 | 605 | 690 |
| Fire Labeled (Inc | ludes Stabilizers) | FL822 | 777 | 863 |
| Hurricane Code | | HC822 | 863 | 948 |
| Fire Labeled Hur | ricane Code | FLC822 | 1037 | 1121 |
| KEY REMOV | ABLE MULLION - 2" × 3" × 8'-0" | | | |
| Standard | | KR822 | 1037 | 1164 |
| Fire Labeled (Inc | ludes Stabilizers) | FLKR822 | 1248 | 1336 |
| Hurricane Code | | HCKR822 | 1336 | 1425 |
| Fire Labeled Hur | ricane Code (Includes Stabilizers) | FLHCKR822 | 1456 | 1510 |
| | ights add \$19 for each additional 12" or less Prices include Top and Bottom Fittings. | | | |
| Note: MCS822 m | nullion cap spacer available as suffix option for 822 series mullions | (e.g. 822MCS x 600 x 8'). | | |
| * For individual | kit see 822 mullion accessories below. | | | |
| INDIVIDUAL | MULLION FITTINGS | | | |
| Mullion Cap | | MC811 | 97 | 112 |
| Bottom Fitting-fl | at sill | MB811 | 70 | 91 |
| Mullion Cap | | MC822 | 158 | 174 |
| Bottom Fitting-fl | at sill | MB822 | 128 | 150 |
| KEY REMOV | ABLE MULLION CAP KIT | | | |
| Mullion Cap Ass | embly | KMC822 | 475 | 496 |
| Fire Labeled Mul | llion Cap Assembly | KMC822F | 686 | 668 |
| 822 MULLIO | N ACCESSORIES | | | |
| *Mullion Cap Sp | acer | MCS822 | 68 | 82 |
| Stabilizers (2 per | r mullion) - Dull Black | ST989 | 76 (Dull Black) | |
| Interlock - Dull B | Black | S1447 | 58 (Dull Black) | |
| | | | DULL | 605, 606, 612 |
| DESCRIPTION | I SERIES | STRIKE NO. | BLACK | 613, 625, 630 |
| STRIKES - RI | M DEVICES | | | |
| | 2100, 5100, 100, R100, FL2100, FL5100, FL100, FR100 | \$300 | | |
| Standard | 2400, FL2400-Pair of Doors with Mullion | 5500 | 64 | - |
| Standard | 2400, FL2400-Single Door (Roller Strike) | S988 | 80 | - |
| | 2100, 2400, 5100, 100, R100, FL2100, FL2400, FL5100, | | | |
| | FL100, FLR100 (Roller Strike) | S301 | 80 | - |
| | 2100, 2400, 5100, 100, R100, FL2100, FL2400, FL5100, | | | |
| Optional | FL100, FLR100 (Roller Strike) | S458 | 80 | |
| | 2100, 5100, 100, R100 (Roller Strike) | S988 | 80 | - |
| | 2100 × 2200, 5100 × 5200, 100 × 200 | S459 | 44 | - |
| STRIKES - VI | ERTICAL ROD DEVICES | 5155 | | |
| Top Strike | 2200, FL2200, 5200, FL5200, 200, FL200 | \$300 | 64 | |
| Optional | 2200, FL2200, 5200, FL5200, 200, FL200 | S301 | 80 | - |
| Bottom Strike | 2200, FL2200, 5200, FL5200, 200, FL200 | S460 | 52 | - |
| | ORTISE DEVICES | | | |
| Standard | Std Curved Lip Single Door ANSI (handed) | S982 | - | 64 |
| | Flat 7/8" Lip ANSI (handed) | S983 | - | 64 |
| Optional | Open Back ANSI (handed) | S984 | - | 120 |
| optional | Open Back $8'' \times 1-1/4''$ (handed) | S985 | - | 120 |
| STRIKES - CO | ONCEALED VERTICAL ROD DEVICES | | | 127 |
| Top Strike | 2700, FL2700, 2800, FL2800, 2600, FL2600 | S519 | 64 | - |
| Bottom Strike | 2700, FL2700, 2800, FL2800, 2600, FL2600 2700, FL2700, 2800, FL2800, 2600, FL2600 | | 52 | - |
| BOLLOIN JUIKE | 2700, 1 22700, 2000, 1 2000, 2000, 1 22000 | J400 | JZ | - |



Accessories

| SERIES | DESCRIPTION | PRODUCT NO. | 628 | 606, 612 613, 630 | 605, 625 |
|--|--|--|---|----------------------|----------|
| RIGID DUMM | IY TOUCHBAR | | | | |
| Apex | Wide Stile Rigid | 671DR-3, 671DR-4 | 615 | 776 | 898 |
| | Narrow Stile Rigid | N673DR-3, N673DR-4 | 015 | //0 | 050 |
| ACTIVE DUM | MY TOUCHBAR WITH MICRO SWI | тсн | | | |
| Apex | Wide Stile Active | TS672DA-3, TS672DA-4 | 1044 | 1058 | 1185 |
| | Narrow Stile Active | TSN674DA-3, TSN674DA-4 | 1044 | 1058 | 1105 |
| OPTIONS FOR | R ACTIVE DUMMY TOUCHBAR | | | | |
| ιLK | Exit Alarm: battery operated kit (9V bat | tery included) | | | 557 |
| LW | Exit Alarm: remote power kit (12 or 24 | VDC) | | | 557 |
| D | Cylinder Dogging: 1-1/4" Mortise Cylin | der not included | | | 83 |
| S | Door Position Monitoring Switch | | | | 116 |
| DS | Touchbar Monitoring Double Switch | | | | 280 |
| SERIES | DESCRIPTION | PRODUCT NO. | ALL FINISHES | | |
| MORTISE LOO | | | | | |
| Apex & | Functions 01, 02, 03 | M303, M303F | | | |
| lympian | Functions 05, 08, 14, 15 | M308, M308F | 605 | | |
| | Functions 10 | | | | |
| 1-1/4" mortise of Lock front furnis | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. | M310, M310F ed please see cylinders below. | | | |
| 1-1/4" mortise of the second second | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. | | | | |
| 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. | | | | |
| • 1-1/4" mortise of • Lock front furnise • Available in 605 • When ordering s • e.g. M303 × RHR • SERIES | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION | d please see cylinders below. | | | |
| 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR SERIES FIRE BOLT AS | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION | d please see cylinders below. | 148 | | |
| • 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR FIRE BOLT AS SPER & Olympian TRANSOM BF | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET | ed please see cylinders below. PRODUCT NO. FB277 | | | |
| • 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR FIRE BOLT AS SPER & Olympian TRANSOM BF | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION SEMBLY Fire Bolt Assembly | d please see cylinders below. PRODUCT NO. | 148 | | |
| 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR FIRE BOLT AS SPER & Olympian TRANSOM BF | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET | ed please see cylinders below. PRODUCT NO. FB277 | 62 | | |
| 1-1/4" mortise of Lock front furnise Available in 605 When ordering se.g. M303 × RHR SERIES FIRE BOLT AS Apex & Olympian TRANSOM BR Apex & Olympian | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION SSEMBLY Fire Bolt Assembly RACKET Transom Bracket | ed please see cylinders below. PRODUCT NO. FB277 TMB453 | 62 | | |
| 1-1/4" mortise of Lock front furnise Available in 605 When ordering se.g. M303 × RHR SERIES FIRE BOLT AS Apex & Olympian TRANSOM BR Apex & Olympian | <pre>tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET Transom Bracket 7/32" Dogging Key</pre> | ed please see cylinders below. PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) DK220 | 62 | | |
| 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR ERIES FIRE BOLT AS pex & Olympian TRANSOM BR pex & Olympian TOOLS | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION SSEMBLY Fire Bolt Assembly RACKET Transom Bracket | ed please see cylinders below. PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) | 62 | | |
| 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR FIRE BOLT AS pex & Olympian TRANSOM BF pex & Olympian TRANSOM BF pex & Olympian | <pre>tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. RB × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET Transom Bracket 7/32" Dogging Key</pre> | PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) DK220 HW996 | 62 | | |
| 1-1/4" mortise of Lock front furnise Available in 605 When ordering se.g. M303 × RHR GERIES FIRE BOLT AS Apex & Olympian TRANSOM BF | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. B × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET Transom Bracket 7/32" Dogging Key 5/32" Hex Wrench* | PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) DK220 HW996 | 62 | | |
| 1-1/4" mortise of Lock front furnise of Lock front furnise of Available in 605 When ordering seg. M303 × RHR SERIES FIRE BOLT AS Apex & Olympian TRANSOM BF Apex & Olympian TOOLS All Devices | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. (B × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET Transom Bracket 7/32" Dogging Key 5/32" Hex Wrench* * Hex Wrench for crossbar plugs and m | ed please see cylinders below. PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) DK220 HW996 nortise active case. | 62 17 See BEST Price | | |
| 1-1/4" mortise e Lock front furnise Available in 605 When ordering s e.g. M303 × RHR SERIES FIRE BOLT AS Apex & Olympian TRANSOM BF Apex & Olympian TOOLS All Devices | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. B × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET Transom Bracket 7/32" Dogging Key 5/32" Hex Wrench* | PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) DK220 HW996 | 62 17 See BEST Price Book for more | | |
| 1-1/4" mortise of Lock front furnise of Lock front furnise of Available in 605 When ordering seg. M303 × RHR SERIES FIRE BOLT AS Apex & Olympian TRANSOM BF Apex & Olympian TOOLS All Devices | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. (B × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET Transom Bracket 7/32" Dogging Key 5/32" Hex Wrench* * Hex Wrench for crossbar plugs and m | ed please see cylinders below. PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) DK220 HW996 nortise active case. | 62 17 See BEST Price Book for more detail | | |
| 1-1/4" mortise of Lock front furnis Available in 605 When ordering s e.g. M303 × RHR ERIES FIRE BOLT AS pex & Olympian TRANSOM BF pex & Olympian TRANSOM BF pex & Olympian | tise Lock see page 32. cylinder not included. If cylinder is require shed beveled. 5, 606, 612, 613, 625, 630 Finishes. specify: model no., hand and finish. (B × 630) DESCRIPTION SEMBLY Fire Bolt Assembly RACKET Transom Bracket 7/32" Dogging Key 5/32" Hex Wrench* * Hex Wrench for crossbar plugs and m | ed please see cylinders below. PRODUCT NO. FB277 TMB453 (Use Strike No. S300,see pg. 31) DK220 HW996 nortise active case. | 62 17 See BEST Price Book for more | | |

Note: Rim and mortise cylinders (housings) as well as interchangeable cores are available from our BEST product line. Please ask your local Stanley Security Solutions sales representative about the many options available to fit your specific requirements including patented keying systems such as BEST CORMAXTM.



Electrical Products

| DESCRIPTION | | PRODUCT NO | LIST PRICE |
|---|--|--------------------------------------|------------|
| POWER SUPPLY - SERIES ELR150 (REQUIRI | ED FOR ELR DEVICES) | | |
| Power Supply including (1) control module for (1) dev | ice | ELR151 | 671 |
| Power Supply including (2) control modules for (2) de | vices | ELR152 | 918 |
| Power Supply including (3) control modules for (3) de | vices | ELR153 | 1167 |
| Power Supply including (4) control modules for (4) de | vices | ELR154 | 1415 |
| Power Supply, no control modules | | ELR150 | 426 |
| | | | |
| CONTROL MODULE | | | |
| Control Module card (on/off adjustable Time Delay st | andard) | CM150-08 | 249 |
| | | | |
| BATTERY BACK-UP | | | |
| Battery back-up card (batteries not included) | | BT150-07 | 457 |
| | | | |
| POWER SUPPLY - SERIES PS160-6 (REQUIR | | | 607 |
| Power Supply (6 amp) operates up to (4) DE Devices | wire run permitting) | PS161-6 | 697 |
| CONVERSION KITS | | PRODUCT NO | |
| ELECTRIC LATCH RETRACTION* | | | |
| For 3'-0", 4'-0" Apex Wide Stile Device | | ELRK-3, ELRK-4, ELRKF-3, ELRKF-4 | 842 |
| For 3'-0", 4'-0" Apex Narrow Stile Device | | NELRK-3, NELRK-4, NELRKF-3, NELRKF-4 | 842 |
| • ELR Conversion Kits are ONLY available for Apex 20 | 00 Series Devices. | | |
| * Requires PHI ELR150 Power Supply (see above). | | | |
| | | | |
| MONITORING | | | |
| All Apex Devices | Touchbar Monitoring Switch | TSK309 | 230 |
| All Apex Devices | Touchbar Monitoring Double Switch | TDSK310 | 280 |
| Apex Wide Rim Device Only | Latchbolt Monitoring Switch | LSRK298 | 230 |
| Apex Wide Rim Device Only | Latchbolt Monitoring Double Switch | LDSRK299 | 280 |
| Apex Wide SVR or CVR Devices Only | Latchbolt Monitoring Switch | LSVK910 | 230 |
| | | | |
| Q OPTION RETROFIT KITS | | | |
| Wireless Access Management System | | | |
| | QSRK5267 – 2103 Rim | | |
| | QSVK5268 – 2203, 2703 Surface and | Concealed Vertical Rod | 508 |
| | Surface and Conceled Vertical Rod | | |
| NOTE: For additional product details see Apex 2000 s | - | | |
| Latchbolt Monitoring for Apex Mortise Devices, spe | city LSM303 or LSM308 Electric Mortise | Lock, see pg. 32. | |
| ELECTRIC RIM DEVICE | | | |
| 2103, FL2103 Rim Devices | Electric Lock/Unlock Outside Trim | E2103K | 559 |
| 2103, I L2103 MIII DEVICES | LIECUIC LUCK/OITIOCK OUTSIDE ITITI | LZTUJK | 222 |



Electrical Products - (continued)

| DESCRIPTION | PRODUCT NO. | ALL FINISHES |
|--|-------------------|--------------|
| ELECTRIC MORTISE LOCK | | |
| Latchbolt monitoring, "03" Function | LSM303, LSM303F | 840 |
| Latchbolt monitoring, "08" Function | LSM308, LSM308F | 040 |
| Electric lock/unlock with switch to monitor outside trim (locked/unlocked) | EM303, EM303F | 1173 |
| Electric lock/unlock with switches to monitor the outside trim (locked or unlocked) and to monitor the latchbolt | LSEM303, LSEM303F | 1226 |

NOTES:

• Fail Secure "FSE" is furnished standard. When Fail Safe is required specify "FS".

• Electric lock/unlock option specify 24V.

• Price does not include 1-1/4" mortise cylinder. If cylinder is required please see cylinders on pg. 30.

• Lock front furnished beveled.

• When ordering specify: model no., voltage (24V), Fail Safe/Fail Secure, hand and finish.

(e.g. EM303 \times 24V \times FS \times RHRB \times 630)

| DEVICE SERIES | DESCRIPTION | DEVICE SIZE | KIT NO. | ALL FINISHES |
|-------------------|--------------------|--------------------|---------|--------------|
| EXIT ALARM KIT | | | | |
| | Battery Operated* | 3'-0" | ALK-3 | |
| Amory Windo Chilo | | 4'-0" | ALK-4 | F 0 0 |
| Apex Wide Stile . | Pamata Dower | 3'-0" | ALW-3 | 580 |
| | Remote Power | 4'-0" | ALW-4 | |
| | Dettern Onerstellt | 3'-0" | NALK-3 | |
| A | Battery Operated* | 4'-0" | NALK-4 | 580 |
| Apex Narrow Stile | Remote Power | 3'-0" | NALW-3 | |
| | | 4'-0" | NALW-4 | |
| | Dettern Oreneted* | 3'-0" | RALK-3 | |
| D-1+** | Battery Operated* | 4'-0" | RALK-4 | 520 |
| Reliant** | | 3'-0" | RALW-3 | 528 |
| | Remote Power | 4'-0" | RALW-4 | |
| Notes: | | | | |

WH495 Wiring Harness - Required for Remote Arming/Disarming the Alarm.

• Narrow and Wide Stile, kits are available in 605, 606, 612, 613, 625, 628, 630 Finishes.

• To order specify Kit No. and Finish (e.g. ALK- 3×630).

* For Battery operated kits a 9 Volt Battery is included.

** Reliant Series, kits are available in 689 or 695 Finishes.

| DEVICE SERIES | DESCRIPTION | DEVICE SIZE | KIT NO. | |
|--|--------------------------|-------------|---------|-----|
| DOOR POSITION MONITORING SWITCH* | | | | |
| Apex Wide Stile | Door Position Switch Kit | All | DS880 | 121 |
| Apex Narrow Stile | Door Position Switch Kit | All | NDS986 | 121 |
| * Kit includes Endcap and Endcap Mounting Bracket, specify finish. | | | | |

| DESCRIPTION | PRODUCT NO. | |
|---|-------------|-----|
| POWER TRANSFER | | |
| Conc Power Transfer - accepts 5/16" wire bundle - max. 120° degree swing | EPT-5 | 218 |
| Door Loop - Armored Flex Conduit (less wires) 18" long - max. 120° degree swing | EPT-2 | 64 |
| Electric Power Transfer | EPT-12C | 492 |

38



Apex Component Assemblies - Wide Stile

| DESCRIPTION | FUNCTION/ DEVICE TYPE | ASSEMBLY NO. | STEEL PLATED | 628 | 606, 612 613, 630 | 605 625 |
|--|-------------------------------|---|-----------------|-----|----------------------|---------|
| ACTIVE CASE (INCLUDES LOCK SID | E FILLER) | | | | | |
| Rim - Reversible | 01, 02 , 03 05, 08, 14, 15 | A2103 A2108 | _ | 535 | 533 | 568 |
| Rim - Reversible (Fire Rated) | 01, 02 , 03 05, 08, 14, 15 | A2103F A2108F | _ | 668 | 665 | 707 |
| Surface Vertical Rod - Reversible | 01, 02, 03 05, 08, 14, 15 | A2203, A2203F A2208, A2208F | | | | |
| Mortise - Reversible | 01, 02, 03, 05 08, 14, 15 | A2303 A2303F | | 535 | 533 | 568 |
| Concealed Vertical Rod (metal) - Reversible | 01, 02, 03 05, 08, 14, 15 | A2803, A2803F A2808, A2808F | _ | 727 | 222 | 200 |
| Concealed Vertical Rod (wood) - Reversible | 01, 02, 03 05, 08, 14, 15 | A2703, A2703F A2708, A2708F | | | | |
| TOP LATCH | | | | | | |
| Surface Vertical Rod (630 furnished for 628, includes Latch Cover) | 2200, FL2200 | TL22, TL22F | _ | - | 316 | 356 |
| Concealed Vertical Rod (metal, includes Top Latch & Rod Assembly) | 2800, FL2800 | TL28-8, TL28-10, TL28F-8, TL28F-10 | 215 | - | - | _ |
| Concealed Vertical Rod (wood, includes Top Latch & Rod Assembly) | 2700, FL2700 | TL27-8, TL27-10, TL27F-8 | 330 | _ | - | _ |
| BOTTOM LATCH | | | | | | |
| Surface Vertical Rod (630 furnished for 628, includes Latch Cover) | 2200, FL2200 | BL22, BL22F | _ | _ | 277 | 322 |
| Concealed Vertical Rod (metal, includes Top Latch & Rod Assembly) | 2800, FL2800 | BL28, BL28F | 152 | _ | - | _ |
| Concealed Vertical Rod (wood, includes Top Latch & Rod Assembly) | 2700, FL2700 | BL27, BL27F | 256 | _ | _ | _ |
| COVERS | | | | | | |
| ACTIVE CASE | | | | | | |
| Rim | 2100, FL2100 | AC21 | | | | |
| Rim "10" Function - Handed | 2110, FL2110 | AC2110 | | | | |
| Surface Vertical Rod | 2200, FL2200 | AC22 | | 107 | 150 | 200 |
| Mortise Mortise "10" Function - Handed | 2300, FL2300 2310, FL2310 | AC23 AC2310 | - | 107 | 152 | 200 |
| Concealed Vertical Rod | 2700, FL2700, 2800, FL2800 | AC23 | | | | |
| SVR LATCH CASE | , | | | | | |
| (Top or Bottom) (630 furnished for 628) | 2200, FL2200 | LC22 | - | _ | 134 | 166 |

Notes:

• Assembly Nos. with Suffix "F" designate Assemblies for Fire Exit Hardware.

• Specify Hand for all reversible Active Case Assemblies.



Apex Component Assemblies - Wide Stile

| NEC CRIPTION | FUNCTION/ | | | 639 | 606, 612 613 630 | COF COF |
|--|-----------------|---------------------------|--------|-------|---------------------|---------|
| DESCRIPTION | DEVICE TYPE | ASSEMBLY NO. | PLATED | 628 | 613, 630 | 605 625 |
| | | | | | | |
| ouchbar Assembly less active case, end cap & brkt.) | All Devices | TBA-3, FLTBA-3, TBA-4, | - | 801 | 926 | 1,033 |
| | _ | FLTBA-4, TBA-26, FLTBA-26 | | _ | _ | |
| DEVICE ENDCAP | | 5,000 | | | 74 | |
| ndcap | All Devices | EC992 | - | - | 71 | 94 |
| Nounting Bracket | All Devices | MB305 | 49 | - | - | - |
| CENTER CHASSIS | | | | | | |
| oncealed Vertical Rod (metal) | 2800, FL2800 | ССН344 | 321 | - | - | - |
| TOP ROD | | | | | | |
| urface Vertical Rod | 7'-0″ | TR1854 | | | | |
| ncludes Rod Pin, Clip & Rod Guide) | 8'-0" | TR1855 | | | 81 | 107 |
| 530 furnished for 626 and 628) | 1 0'-0" | TR1857 | - | - | 01 | 107 |
| 2'-0" is not available on Fire Rated Devices) | 12'-0" | TR5197 | | | | |
| | 6'-8" to 8'-0" | TR551 | 110 | | | |
| oncealed Vertical Rod (metal) | 8'-1" to 10'-0" | | 118 | - | - | - |
| | 6'-8" to 8'-0" | TR554 | | | | |
| oncealed Vertical Rod (wood) | 8'-1" to 10'-0" | | 195 | - | - | - |
| BOTTOM ROD | 0 1 10 10 0 | 11(555 | | | | |
| urface Vertical Rod | | | | | | |
| ncludes Rod Pin, Clip & Rod Guide) | All Devices | BR1859 | - | - | 78 | 102 |
| 530 furnished for 626 and 628) | , in Devices | DITIOSS | | | 10 | 102 |
| oncealed Vertical Rod | | | | | | |
| netal) (Includes Bottom bolt) | All Devices | BR553 | 118 | - | - | - |
| incealed Vertical Rod | | | | | | |
| wood) (Includes Bottom bolt) | All Devices | BR556 | 195 | - | - | - |
| EXTENDED BOTTOM ROD | | | | | | |
| urface Vertical Rod | | DDE247.00 | _ | | 120 | 10 |
| | All Devices | BR5247-09 | - | - | 128 | 158 |
| oncealed Vertical Rod | All Devices | BR5244-09 | 99 | - | - | - |
| (metal) (Bottom bolt NOT included) | | | | | | |
| Concealed Vertical Rod | All Devices | BR5246-09 | 99 | - | - | - |
| vood) (Bottom bolt NOT included) | 7 9 001000 | | | | | |
| ROD GUIDE, PIN & CLIP | | | | | | |
| urface Vertical Rod | 2200, FL2200 | RG124 | - | | 40 | 41 |
| CYLINDER DOGGING KIT | | | | | | |
| ylinder Dogging Kit | All Devices | CDK-3, CDK-4 | | 148 | 148 | 152 |
| -1/4" Mortise Cylinder not included, see pg. 30) | All Devices | CDK-3, CDK-4 | - | 140 | 140 | IJZ |
| DOUBLE CYLINDER KIT - "10" FUNCTION | I - HANDED | | | | | |
| Cylinders not included, see pg. 30) | | | | | | |
| im Device | | | | | | |
| ncludes locking/cylinder assy., cylinder collar and | | RDC-10 | - | 411 | 457 | 529 |
| ctive case cover) | | | | | | 010 |
| fortise Device | | | | | | |
| ncludes M310 Mortise Lock, extension assy., | | MDC-10 | _ | 1,016 | 1062 | 1134 |
| ylinder bracket/collar and active case cover) | | | - | 1,010 | 1002 | 1134 |
| - | | | | | | |
| | | CN4V004 | 50 | | | |
| ne set of 1/8" shims | All Devices | SMK994 | 58 | - | - | - |
| BACK PLATE | | | | | | |
| ccess Control Trim | All Devices | BP21 | 56 | - | - | - |
| enter Driven Cam | . III DEVICES | | 50 | | | |

Note: Converts 2101, 2102, 2103, 2108 to 21 Center driven cam exit device



Apex Component Assemblies - Narrow Stile

| DESCRIPTION | FUNCTION/ DEVICE TYPE | ASSEMBLY NO. | STEEL PLATED | 628 | 606, 612 613, 630 | 605 625 |
|--|--------------------------|---------------------------------------|-----------------|------------|----------------------|------------|
| ACTIVE CASE (INCLUDES LOCK SIDE FIL | LER) | | | | | |
| Rim - Non Handed | All Functions | A24 A24F | - | 590 721 | 587 719 | 586 763 |
| Concealed Vertical Rod (metal) - Non Handed | All Functions | A26, A26F | - | 590 | 587 | 626 |
| COVER | | | | | | |
| ACTIVE CASE | | | | | | |
| Rim | 2400, FL2400 | AC24 | - | 107 | 152 | 200 |
| Concealed Vertical Rod | 2600, FL2600 | AC26 | | | | |
| TOUCHBAR COMPONENTS | | | | | | |
| Touchbar Assembly (less active case, end cap & bracket) | All Devices | NTBA-3, FLNTBA-3, NTBA-4, FLNTBA-4 | | 802 | 934 | 1,033 |
| DEVICE ENDCAP | | | | | | |
| Endcap | All Devices | NEC993 | - | - | 71 | 94 |
| Nounting Bracket | All Devices | NMB591 | 49 | - | - | - |
| CENTER CHASSIS | | | | | | |
| Concealed Vertical Rod (metal) | 2600, FL2600 | CCH343 | 348 | - | - | - |
| TOP LATCH | | | | | | |
| Concealed Vertical Rod | 2600 | TL28-8, TL28-10 | 245 | | | |
| metal, includes Top Latch & Rod Assembly) | FL2600 | TL28F-8, TL28F-10 | 215 | - | - | - |
| BOTTOM LATCH | | | | | | |
| Concealed Vertical Rod | 2600 | BL28 | 152 | | | |
| metal, includes Bottom Bolt & Rod Assembly) | FL2600 | BL28F | 152 | - | - | - |
| TOP ROD | | _ | | | | |
| Concealed Vertical Rod (metal) | 6'-8" to 8'-0" | TR551 | 118 | | | |
| | 8'-1" to 10'-0" | TR552 | 110 | - | - | - |
| BOTTOM ROD | | | | | | |
| Concealed Vertical Rod (metal) Includes Bottom Bolt) | All Devices | BR553 | 118 | - | - | - |
| EXTENDED BOTTOM ROD | | | | | | |
| Concealed Vertical Rod (metal) Bottom bolt NOT included) | All Devices | BR5244-09 | 99 | - | - | - |
| CYLINDER DOGGING KIT | | | | | | |
| Narrow Cylinder Dogging Kit (1-1/4" Mortise Cylinder Not Included, see pg.30) | All Devices | NCDK-3, NCDK-4 | - | 148 | 148 | 152 |
| SHIM KIT | | | | | | |
| Kit consists of: | | NSMK995 | | | | |
| one set of 1/8" shims | All Devices | (Dull Black) | 58 | - | - | - |
| Notec: | | | | | | |

Notes:

• Assembly Nos. with Suffix "F" designate Assemblies for Fire Exit Hardware.

phi PRECISION

Reliant Component Assemblies

| | | | STEEL | | |
|--|--------------------|----------------|--------|----------|-------|
| DESCRIPTION | DEVICE TYPE | ASSEMBLY NO. | PLATED | 689, 695 | BLACK |
| COVERS | | | | | |
| ACTIVE CASE | | | | | |
| Rim | 5100, FL5100 | AC5100 | _ | | 76 |
| Surface Vertical Rod | 5200, FL5200 | AC5200 | | | |
| SVR Latch Case (Top or Bottom) | 5200, FL5200 | LC5200 | - | - | 56 |
| DEVICE ENDCAP | | | | | |
| Endcap | All Devices | REC999 | 48 | - | 32 |
| Mounting Bracket | All Devices | MB305 | | | _ |
| TOP LATCH | | | | | |
| Surface Vertical Rod (Includes Latch Cover) | 5200, FL5200 | TL52, TL52F | - | - | 214 |
| BOTTOM LATCH | | | | _ | _ |
| Surface Vertical Rod | | | | | |
| (Includes Latch Cover) | 5200, FL5200 | BL52, BL52F | - | - | 179 |
| TOP ROD | | | | | |
| Surface Vertical Rod | 7'-0″ | RTR1860 | | | |
| (Includes Rod Pin, Clip & Rod Guide) | 8'-0" | RTR1861 | - | 58 | - |
| · · · · · | 10'-0" | RTR1863 | | | |
| BOTTOM ROD | | | | | |
| Surface Vertical Rod (metal) | All Devices | RBR1864 | | 58 | _ |
| (Includes Rod Pin, Clip & Rod Guide) | All Devices | NDI(1004 | - | 50 | _ |
| EXTENDED BOTTOM ROD | | | | | |
| Surface Vertical Rod | All Devices | BR5248-09 | - | 98 | - |
| ROD GUIDE, PIN & CLIP | | | | | |
| Surface Vertical Rod | 5200, FL5200 | RRG123 | - | - | 32 |
| CYLINDER DOGGING KIT | | | | | |
| Reliant Cylinder Dogging Kit | | RCDK-3, RCDK-4 | - | 118 | - |
| (1-1/4" Mortise Cylinder Not Included) | | | | | |
| Notes: | | | | | |

• Assembly Nos. with Suffix "F" designate Assemblies for Fire Exit Hardware.

• Top and Bottom Latch assemblies are priced with covers, deduct cover price if not required.



Olympian Component Assemblies - Crossbar

| DESCRIPTION | FUNCTION/ DEVICE | ASSEMBLY NO | 606, 612 613, 630 | 605 625 |
|-----------------------------------|---------------------|---------------|----------------------|------------|
| ACTIVE CASE | | | | |
| Rim - Handed | 01, 02, 03 | A103 | 747 | 834 |
| | 05, 08, 14, 15 | A108 | 747 | 034 |
| Rim - Reversible | 01, 02, 03 | AR103 | 747 | 834 |
| | 05, 08, 14, 15 | AR108 | 747 | 034 |
| Rim - Handed | 01, 02, 03 | A103F | 880 | 970 |
| | 05, 08, 14, 15 | A108F | 880 | 970 |
| Rim - Reversible | 01, 02, 03 | AR103F | 880 | 970 |
| | 05, 08, 14, 15 | AR108F | 880 | 970 |
| Surface Vertical Rod - Reversible | 01, 02, 03 | A203, A203F | 747 | 834 |
| | 05, 08, 14, 15 | A208, A208F | 747 | 034 |
| Mortise - Handed | All Functions | A303, A303F | 747 | 834 |
| INACTIVE CASE | | | | |
| All - Reversible | All Devices | B123, B123F | 538 | 620 |
| TOP LATCH | | | | |
| Surface Vertical | 200 | TL22 | 217 | 359 |
| Rod | FL200 | TL22F | 317 | 309 |
| BOTTOM LATCH | | | | |
| Surface Vertical | 200 | BL22 | 200 | 221 |
| Rod | FL200 | BL22F | 280 | 321 |
| COVERS | | | | |
| ACTIVE CASE | | | | |
| Rim - Handed | 100, FL100 | AC10, AC10F | | |
| Rim - Reversible | R100, FLR100 | ACR10, ACR10F | 152 | 201 |
| Surface Vertical Rod | 200, FL200 | AC20, AC20F | 153 | 201 |
| Mortise | 300, FL300 | AC30, AC30F | | |
| INACTIVE CASE | | | | |
| Panic Exit Hardware | All Devices | HS123 | 152 | 201 |
| Fire Exit Hardware | All Devices | HS123F | 153 | 201 |
| SVR LATCH CASE | | | | |
| (Top or Bottom) | 200, FL200 | LC22 | 136 | 166 |
| Notes: | | | | |

• Assembly Nos. with Suffix "F" designate Assemblies for Fire Exit Hardware.

• Assemblies are priced with covers, deduct cover price if not required.

* Specify Hand for all reversible or handed Active Case Assemblies.



Olympian Component Assemblies - Crossbar

| | FUNCTION/ | | | STEEL | 606, 612 | 605 |
|----------------------------------|-----------------|-----------|----------|--------|----------|-----|
| DESCRIPTION | DEVICE | ASSEMBLY | NO | PLATED | 613, 630 | 625 |
| CROSSBAR* | | 3' DOOR | 4' DOOR | | | |
| Standard | All Devices | CB123-3 | CB123-4 | - | 104 | 127 |
| Reinforced | All Devices | CBR123-3 | CBR123-4 | - | 124 | 147 |
| Knurled | All Devices | CBK123-3 | CBK123-4 | - | 258 | 284 |
| CROSSBAR PLUG | | | | | | |
| | All Devices | CP123 | | - | 24 | 26 |
| TOP ROD* | | | | | | |
| Surface Vert Rod | 7'-0" | TR1854 | | | | |
| | 8'-0" | TR1855 | | - | 81 | 107 |
| | 10'-0" | TR1857 | | | | |
| | 12'-0" | TR5197 | | | | |
| BOTTOM ROD* | | | | | | |
| Surface Vertical Rod | All Devices | BR1859 | | - | 81 | 107 |
| EXTENDED BOTTOM ROD |) | | | | | |
| Surface Vertical Rod | All Devices | BR5247-09 | | - | 136 | 166 |
| ROD GUIDE, PIN & CLIP | | | | | | |
| Surface Vertical Rod | 200, FL200 | RG124 | | - | 42 | 43 |
| BACK PLATE ASSEMBLIES | S - RIM DEVICES | | | | | |
| Rim | 01, 02, 03 | BP103 | | 58 | - | _ |
| | 05, 08, 14, 15 | BP108 | | 50 | - | - |
| Surface Vert Rod | 01, 02, 03 | BP203 | | 58 | | |
| | 05, 08, 14, 15 | BP208 | | 20 | - | - |
| NOTES | | | | | | |

NOTES:

* 630 furnished for 626

Trim Component Assemblies

| SERIES | DESCRIPTION | KIT NO | | | |
|------------------|--|---------|----------|----------|-----|
| TRIM FUNCTION CO | NVERSION KITS | | | | |
| 4900 Trim | From "03" to "08" or "02" to "14" | FC-08 | YFC-08 | Olympian | 148 |
| V4900 Trim | From "03" to "08" or "02" to "14" | VFC-08 | YVFC-08 | Olympian | |
| | From 4900 Trim to V4900 Trim | B-49-01 | YB-49-01 | Olympian | 148 |
| M4900 Trim | From "03" to "08" or "02" to "14" | MFC-08 | MYFC-08 | Olympian | |
| 2900 Trim | From "08" to "03" (**specify Lever Style and finish) | NFC-03 | | | 148 |
| | From "03" to "08" (**specify Lever Style and finish) | NFC-08 | | | |
| CYLINDER ATTACH | MENT KITS - CYLINDERS NOT INCLUDED | | | | |
| | 1700, 2000, 4900, V4900, 603 and 703A Series Trim | CA-03T | | | 30 |
| Wide Stile | Device, "03" function, no outside Trim | CA-03 | | | 17 |
| Narrow Stile | Device, "03" function, no outside Trim | NCA-03 | | | 28 |
| | 2900 Trim - for "03" function | CA-2903 | | | 34 |
| | 2900 Trim - for "08" function | CA-2908 | | | 34 |
| Reliant | 808A Trim (specify finish 689 or 695) | RCA-08 | | | 34 |
| | | | | | |

** Please see specific catalog pages for finish designation.



Weight Chart

| /EIGHTS ARE TO THE NEAREST 0.25 LB. | 6 | 528 | 605, 6 | 06, 612, 613, 62 | 25, 630 | 689, 695 |
|-------------------------------------|---------|--------|--------|------------------|----------|----------|
| ND FOR ESTIMATING PURPOSES ONLY. | WIDE | NARROW | WIDE | NARROW | OLYMPIAN | RELIANT |
| DEVICES - LESS TRIM | | | | | | |
| im | 15.00 | 14.25 | 18.50 | 18.00 | 14.00 | 15.00 |
| urface Vertical Rod | 18.00 | _ | 23.25 | _ | 19.00 | 18.50 |
| ess Bottom Rod | 17.25 | _ | 21.25 | _ | 18.00 | 16.75 |
| lortise | 17.00 | _ | 20.00 | _ | 16.00 | _ |
| oncealed Vertical Rod (metal) | 19.25 | 18.75 | 22.50 | 22.00 | _ | _ |
| ess Bottom Rod | 18.25 | 17.50 | 21.50 | 21.00 | _ | _ |
| Concealed Vertical Rod (wood) | 18.75 | _ | 22.50 | _ | _ | _ |
| ess Bottom Rod | 17.00 | _ | 21.00 | _ | _ | _ |
| Device with DE option: add 13.00 | _ | | _ | _ | | _ |
| 700A | 3.00 | _ | 3.00 | | 3.00 | _ |
| A000 | 3.25 | _ | 3.25 | _ | 3.25 | _ |
| 900A | _ | 3.00 | _ | 3.00 | _ | _ |
| 900A, 4900K | 5.50 | _ | 5.50 | | 5.50 | |
| 4908A | 6.00 | _ | 6.00 | | 6.00 | — |
| 03 | 2.00 | _ | 2.00 | | 2.00 | _ |
| 01 | _ | _ | _ | _ | _ | 0.75 |
| 02, 603 | _ | _ | _ | _ | _ | 1.00 |
| 02, 703 | _ | _ | — | _ | _ | 1.75 |
| 08A, 814A | _ | _ | _ | | _ | 3.25 |
| ACTIVE CASE ASSEMBLY | | | | | | |
| im Device | 2.50 | 2.00 | 2.50 | 2.00 | 6.00 | 1.25 |
| ertical Rod Device | 3.00 | _ | 3.00 | _ | 6.00 | 1.25 |
| lortise Device | 2.25 | _ | 2.25 | _ | 5.50 | |
| Concealed Vertical Rod (metal) | 3.00 | 1.75 | 3.00 | 1.75 | _ | _ |
| Concealed Vertical Rod (wood) | 3.00 | _ | 3.00 | _ | _ | _ |
| OUCHBAR ASSEMBLY | | | | | | |
| '- 0" Device | 10.25 | 10.25 | 13.75 | 13.75 | _ | 10.25 |
| - 0" Device | 11.50 | 11.50 | 15.00 | 15.00 | _ | 11.00 |
| LR Device | 12.50 | 12.50 | 15.00 | 15.00 | _ | _ |
| Dummy Touchbar | 8.75 | 8.75 | 14.50 | 14.50 | _ | _ |
| NACTIVE CASE ASSEMBLY | | | | | | |
| - 0" Device | _ | _ | _ | | 3.00 | _ |
| OP LATCH ASSEMBLY | | | | | | |
| urface Vertical Rod | 2.50 | _ | 2.50 | _ | 2.50 | 2.00 |
| Concealed Vertical Rod | 2.75 | 2.75 | 2.75 | 2.75 | _ | _ |
| BOTTOM LATCH ASSEMBLY | | | | | ľ | |
| urface Vertical Rod | 2.00 | _ | 2.00 | | 2.00 | 1.75 |
| oncealed Vertical Rod | 2.50 | 2.50 | 2.50 | 2.50 | _ | — |
| | | | | | | |
| ULLIONS 1 | 822 | | 30.00 | FI 822 | | 30 |
| | | | | | | |
| IULLION FITTINGS C811 | MC000 | | 2.25 | VMC022 | | 2 |
| B811 | | | | | | |
| B822 1.00 | WIC0221 | | | KWIC0221 | | |
| ORTISE LOCK | | | | | | |
| 303, M308, M310 2.75 | | | | | | |
| OW ENERGY OPERATOR | | | | | | |
| 4990 40.00 | | | | | | |
| 4990T 40.00 | | | | | | |
| LECTRONICS | | | | | | |
| -161 10.0 | | | | | | |
| PT-5 | | | | | | |



QUOTING & ORDERING

Price quotations are based on one (1) shipment to one (1) location, and are valid as identified in the quote but in no case longer than one year from the date of the quote. All exceptions will be evaluated on an individual basis.

All quotation requests will be provided by the Stanley Representative where the project is located.

QUOTING PROCESS AND PROCEDURES: The following information is necessary to secure a price quotation from Stanley.

- Distributor Name
- Distributor Location
- Distributor Contact Name & Phone Number
- Distributor e-mail contact
- Project Name
- Project Location
- Bid Date
- Architects Name, Phone Number, and Architects Location
- Specification Writer Name, Phone Number and Location
- Competitive Influence / Specification
- List of materials to be quoted

Every attempt will be made by Stanley to provide the price quotation in a timely manner. Upon completion, you will receive a copy of the quotation which will also include a valid quotation number. Once the project is secured, a copy of the quotation must accompany your purchase order and be forwarded to Stanley Customer Service Department in Indianapolis for processing.

NON-STANDARD PRODUCT REQUEST: Please contact your Stanley Representative to complete a Non-Standard Product Request Form. All requests should be submitted to the following email address:

Email: product_request@sbdinc.com

Upon receipt of a special order request, Stanley will review the configuration and determine if Stanley is capable of making the special order product and will provide a response to the customer. If Stanley is able to make the special order product, Stanley will provide a specific sku/configuration to the customer for the special order product. This sku/configuration must be identified on all Purchase Orders. In addition, the Purchase Order must be marked as a "Special Order".

ORDERING: The following information is required for Stanley to successfully process any order:

- Itemized Purchase Order (PO)
- Stanley Approved Quote

Please send all orders to SSSCHOrderEntry@sbdinc.com or by fax to 877-835-1030

NOTE: for detailed information on how to place an order for Stanley Best products as well as Stanley masterkey services please see the detailed section regarding "Stanley Best Ordering".

ADD ON ORDERS FOR QUOTED PROJECTS: To place an addon order from a quoted project the Distributor must include the original quote, PO number and/or Stanley's original order number. Add-On orders will be accepted for a period one (1) year from the original order date. **STOCKING ORDERS:** All orders for stock replenishment should be marked as "Stock" and indicate a "Ship To" address that coincides with the stocking Distributor warehouse location.

INCOMPLETE ORDER PROCESS: All orders are screened upon receipt for complete information. If an order is received incomplete, Stanley Customer Service will make one (1) attempt to contact a Distributor directly for the missing requirements. If the information is not made available to Stanley at that time the order will be referred to the local Stanley Representative for resolution. All incomplete orders will be cancelled if not resolved after sixty (60) calendar days.

PRICE DISCREPANCY PROCESS: All entered orders are reviewed by Stanley Customer Service for accuracy and pricing consistency between the Distributor and Stanley. Any order determined by Stanley, in its sole and absolute discretion, to have a value greater than the Total Price shown on the Distributor purchase order will be held by Stanley for a Price Discrepancy. Stanley quotes are also reviewed to ensure that they are complete, approved, and match the PO. Due to pricing sensitivity, all price discrepancies must be resolved exclusively by your Stanley Representative.

ORDER CANCELLATION/CHANGES: All requests for Order Cancellations and Changes (Quantity, Shipping, Finish, Function, etc) should be sent directly to Stanley Customer Service. Requests via phone will be accepted, but must be accompanied by a written request. Factory Order Number, PO Number, Account Info, and Detailed Changes must be clearly indicated. Change requests can be submitted via the following methods:

Email: SSS-CSHelp@sbdinc.com Fax: 1-877-835-1030

All order cancellations or changes will be subject to a cancellation fee as defined in Stanley's Terms and Conditions of Sale.

PRODUCTION SCHEDULING AND "DO NOT SHIP BEFORE"

REQUESTS: All orders are scheduled for production and shipping based on current production lead times and availability. Scheduling is completed only when an order is released from both credit and pricing review.

Exceptions to this policy are made only when the PO is clearly marked: "Do Not Ship Before" followed by the date. (Required Date, Expected Date, etc. do not apply) These orders will be scheduled to ship on or after the date listed.

Changes to "Do Not Ship Before" dates are required in writing and should be sent to: SSS-CSHelp@sbdinc.com.

Be advised orders not clearly marked with a "Do Not Ship Before" designation will be payable within normal terms from the actual shipment date.

EXPEDITE REQUESTS:

- Expedite requests will be reviewed and accommodated by Stanley based on production lead times and availability.
- See the then current Stanley Quick Ship Program for details.



QUOTING & ORDERING (continued)

WHOLESALE PURCHASE: Distributors are also free to utilize Stanley's Authorized Wholesalers to purchase product. Stanley does not make any guarantee of availability or pricing for purchases from an Authorized Wholesaler and the discounts afforded to Distributor by Stanley shall not apply to purchases from an Authorized Wholesaler. The terms and conditions and price of product shall be mutually as agreed between Distributor and Wholesaler.



STANLEY BEST CYLINDER AND PRECISION EXIT DEVICE ORDERS

For current pricing and ordering information associated with Stanley Best cylinders please see the Stanley Best Price Catalog.



RETURNED AUTHORIZATION (RA)

RA REQUESTS: A Return Authorization Form must be utilized to return defective products still under warranty or products deemed repairable by Stanley. All products returned to Stanley must have a correct Return Authorization (RA) number applied to the outside of the shipping carton. All products must be returned within sixty (60) calendar days of RA issue date. This process can take up to seven (7) days after product is received at Stanley's factory. If a defective product presents a security risk, an advance replacement may be requested.

RA PROCESS: Requests for warranty related returns can be initiated by submitting an email to **RGACreditGRP@sbdinc.com**.

The RA Request Form must be completed entirely to process an RA. The following information will be needed:

- End User Name
- Sales Order Number
- Account NumberContact Name
- Item NumberItem Quantity
- Phone Number
- Description of the Problem
- Purchaser Order Number
 - on review and approval of the submitted RA request a cl
- 1. Upon review and approval of the submitted RA request, a claim number is logged and provided back to the requestor by a Stanley Team member.
- 2. Once a claim number is issued, this number should be noted on all references and communications regarding the applicable situation to ensure a claim is easily identified.
- 3. Defective product should be returned to the address below. The shipment must be marked with the approved RA claim number to ensure prompt processing and attention. All shipping charges prepaid by customer.

Stanley Security Solutions, Inc. Attn: Returns Department 6161 East 75th Street Indianapolis, IN 46250

- 4. When material is received at Stanley's factory, Stanley will assess and determine the nature of the defect.
- 5. Defective goods are replaced upon Stanley's determination.
- 6. Credit for material and freight is issued only if deemed appropriate by Stanley. If approved, credit is initiated and a credit memo is mailed to the Distributor within fifteen (15) business days.

PURCHASE ORDERS:

A Purchase Order (PO) will be required if the Product is:

- 1. Defective and not under warranty, or
- 2. An advance replacement is required without verification of whether the product is defective and under warranty.

Please send Purchase Orders to the following:

- Preferred Method Email: RGACreditGRP@sbdinc.com
- Fax: 1-877-835-1030



RETURNED AUTHORIZATION (RA) NON-WARRANTY

RA POLICY: A Return Authorization Form must be utilized to return products that are not defective and otherwise in a resalable condition. Only goods with an invoice date of less than one (1) year will be considered for a non-warranty related return. All materials returned to Stanley for any reason (other than warranty), must have a correct Return Authorization (RA) number applied to the outside of the shipping carton. A thirty percent (30%) re-stocking charge (of the purchase price) will be applied to the Distributor's account for orders returned, including orders that were placed by customer in error. Transportation charges of returned goods must be prepaid by the Distributor. All goods must be returned within sixty (60) calendar days of RA issue date. All goods must be returned in original packaging and be in resalable condition. Product not returned in saleable condition is subject to disposal by Stanley with no credit issued. Commercial Hardware items that are special made to order items will not be returned under any circumstances.

RA PROCESS: Requests for non-warranty related returns can be initiated by submitting an email to **RGACreditGRP@sbdinc.com**.

The RA Request Form must be completed entirely to process an RA. The following information will be needed:

Item Number

- End User Name Sales Order Number
- Account Number
- Contact Name
 Item Quantity
- Phone Number
 Description of the Problem
- Purchaser Order Number
- 1. Upon review and approval of the submitted RA request, a claim number is logged and provided back to the requestor by a Stanley Team member:
- 2. Once a claim number is issued, this number should be noted on all references and communications concerning said RA.
- 3. Product should be returned to the address below. The shipment must be marked with the approved RA claim number to ensure prompt processing and attention. All shipping charges prepaid by customer.

Stanley Security Solutions, Inc. Attn: Returns Department 6161 East 75th Street Indianapolis, IN 46250

- 4. The RA will be processed once material is received at Stanley's factory provided it is received in its original packaging and is in saleable condition.
- 5. Credit is issued to the Distributor account and a credit memo is mailed to the Distributor.

FULFILLMENT ISSUES

Any quality issues (missing parts, wrong parts, handing, finish, etc) should be submitted electronically to: RGACreditGRP@sbdinc.com or your Local Stanley Representative.

Please reference your original Purchase Order (PO) Number, Factory Order Number, Distributor Account, Contact Information (E-mail/Fax), and include a detailed description of the issue.

1) ITEMS MISSING FROM A SHIPMENT: If you have signed your shipment short, Stanley Customer Service will promptly issue a No Charge replacement order for the missing products.

If the shipment was not signed short but after review, Stanley Customer Service determines (based on shipping weights, packing lists, etc) that the order was indeed shipped short, a No Charge replacement will be issued.

If Stanley Customer Service cannot verify a shipping error, an advance replacement order will be entered, charged, and expedited to the Distributor. The quality issue will be forwarded to the Return Authorization Credit Group for resolution.

If it is determined that the item was omitted from the order due to a Stanley order entry error, a change order will be entered and expedited for the missing products.

Please see Stanley's price book for further detail.

2) WRONG ITEMS RECEIVED (parts, handing, function, finish, etc):

Advanced replacements will be issued for any wrong items received. **Such orders will becharged based on pricing/ discounts from the original order.** The issue will be forwarded to Stanley's Return Authorization Credit Group for resolution.

Any quality issue that is determined to be either a Stanley order entry and/or manufacturing error will have an advanced replacement order entered and will be expedited. An RA will be issued to return the incorrect products. No re-stock fee will apply for Stanley order entry and/or manufacturing errors.

October 2015



ORDER FORM

STANLEY Security Attn: Precision Hardware

Attn: Precision Hardware 6161 East 75th Street Indianapolis, IN 46250

| Order Form: | P.O. # |
|---------------|----------------|
| Date | |
| Sold To: | |
| | |
| | |
| Phone Number: | Date Required: |
| Placed By: | Job Name: |
| Entered By: | Salesperson: |
| | Shop Via: |

| Quantity | Product Description | Handling | Finish | Door Size |
|----------|---------------------|----------|--------|-----------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

17679-S3 5/12



RETURN ORDER REQUEST

| □ <u>Return for Replacement</u> □ <u>Return for Credit</u> | |
|--|---|
| Date of Request: | |
| Original Order: | NATURE OF PROBLEM |
| Date of Request: | |
| Original P.O.: | Manufacturing Defect |
| Invoice #: | Warranty Evaluation |
| Customer Name: | Missing Parts |
| Account Number: | Wrong Matterials Received |
| Address: | Wrong Matterials Ordered |
| City: | Wrong Quantity |
| State: | Return Inventory |
| Contact Name: | Other: |
| Email: | |
| Phone: | Note: All returns shall be subject to Stanley's current Terms of Sale and Warranty as outlined in Stanley's price catalog. |
| Ship Replacement Material to Address Above | Ship Replacement Material to Address on Order |

DETAILED DESCRIPTION OF DEFECT OR REASON FOR RETURN

| RETURN MATERIAL | | | |
|-----------------|----------|----------------------|---------------------|
| Line Item # | Quantity | Product Nomenclature | Product Description |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

Please e-mail completed form to RGACreditGrp@sbdinc.com or Fax to 1-888-214-1918





STANLEY Security, a business division of Stanley Black & Decker, is a provider of integrated access control and security solutions for institutional, commercial and industrial businesses and organizations. STANLEY Security delivers a comprehensive suite of security products, software and integrated systems with a strong emphasis on service. STANLEY Security is committed to extending its position as a leading comprehensive resource for a broad and extensive array of solutions that span the entire security spectrum.

© 2015 Stanley Security Solutions, Inc. STANLEYsecurity.com/licenses

STANLEYsecurity.com/PRECISION | 1.855.365.2407