


**Heavy-duty overhead door holder and stop
for exterior, vestibule or interior doors,
single acting**

**9000 ADJ SERIES
SURFACE MOUNTED**

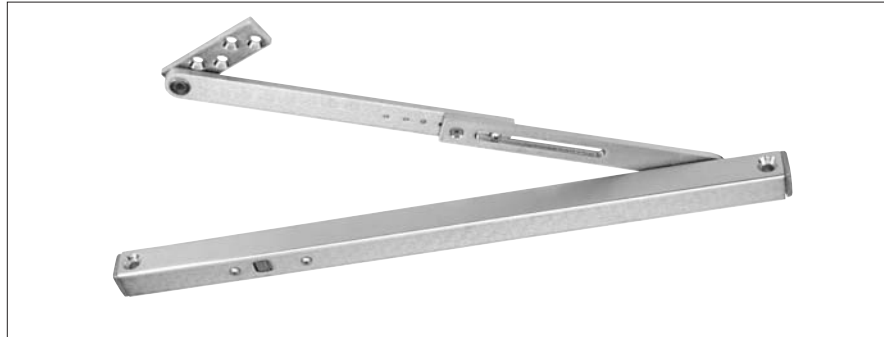

Patent No. 5,381,628

STANDARD FEATURES

- For all Stainless Steel Components - Prefix N
- Non-handed/reversible
- Single point hold-open is adjustable from 85° to 110°
- Hold-open knob can be disengaged to act as a stop only
- 5° to 7° shock compression following hold-open point
- Steel shock absorbing spring
- Die cast end block and shock block
- Maximum opening 110°, minimum door thickness 1 3/4"
- Wood, machine screws and sex bolts included
- Available in all BHMA plated and sprayed finishes



**WHEN ORDERING,
please list:**

Model number

*Door closer number or other
hardware*

*Mounting means of the door
and butt size*

*Hold-open or dead-stop
degree*

Door opening and thickness

Finish

SPECIFICATIONS:

**Stop only function to be
Warnock Hersey listed as
manufactured by ABH.**

*Material:
brass/steel/stainless steel;
channel 3/32" thick and 1 1/8"
depth; arm 1/4" thick and 1"
wide; jamb bracket 1/4" thick
and 1" wide; sliding block
shall have easy access for
tension adjustment.
Hold-open mechanism can be
disengaged to function as
stop only; with field adjustable
degree hold-open or stop.*

DOOR FRAME OPENING	HOLDER NUMBER		
	BUTTS OFFSET PIVOTS	HOLD- OPEN	STOP
28" - 31 15/16"	9011A	9021A	9031A
32" - 39 15/16"	9012A	9022A	9032A
40" - 43 15/16"	9013A	9023A	9033A
44" + Greater	9014A	9024A	9034A

Contact ABH for special templating or other door opening
Average weight/unit 6 lbs.

www.abhmfg.com
E-mail: abhinfo@abhmfg.com
Architectural Builders Hardware Mfg., Inc.
1222 Ardmore Ave., Itasca, IL 60143
630.875.9900; FAX 800.9FAXABH (932.9224)

© 2007 ABH Mfg., Inc.
Printed in USA 04/07

