


# UL LISTED MAGLOCKS WITH DS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY, LOCK STATUS SENSOR & DOOR STATUS SENSOR



## PRIMARY APPLICATIONS

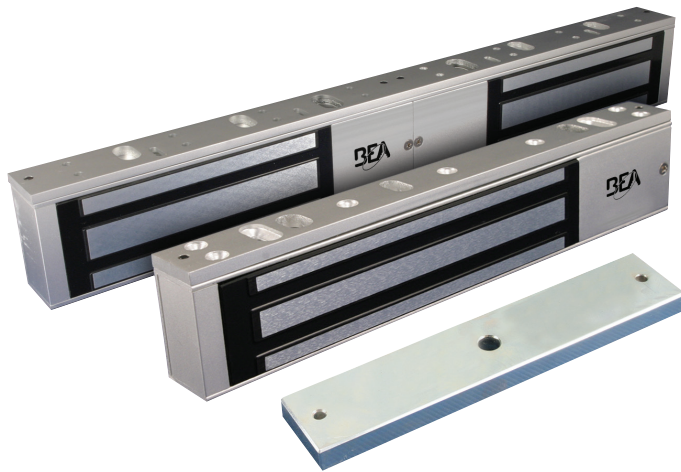

## DESCRIPTION

BEA's UL Listed Maglocks with DS are part of the portfolio of request to exit products, including presence sensors, power supplies, heavy duty piezoelectric devices, illuminated buttons, access keypads and other peripheral devices.

BEA's UL Listed Maglock with DS provides a standards compliant locking solution for retail, healthcare, banking and other high security facilities that require a UL listed security product. UL Listed Maglocks can be used on hollow metal, wood, aluminum, glass and composite door materials.

The Maglock with DS is available in surface mount, single or double door configurations, with a holding force of 600 or 1,200 lbs. These locks include an adjustable 0-90 sec relock time delay, lock status sensor with visible LED and door status sensor.

## FEATURES & BENEFITS

- UL Listed
- Adjustable 0-90 second relock time delay
- Lock Status Sensor with visible LED
- Door Status Sensor
- Input voltage of 12/24 VDC, must be used with UL Listed power supply
- Variety of mounting hardware available
- Available in access control packages with sensor, logic module, actuator and maglock
- This solution is tested and certified with all other BEA request to exit devices, including maglocks, sensors, logic modules, power supplies and other peripherals
- Backed by BEA's Technical Support Specialists, excellent customer service and BEA's Sensor Integration School



BEA, Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462  
Technical Support: 800.407.4545  
www.BEAinc.com

## RELATED REQUEST TO EXIT PRODUCTS



R2E-100



FLY KIT



BR3 LOGIC MODULE



ACTUATORS



ELECTRIC STRIKES



POWER SUPPLIES

## TECHNICAL SPECIFICATIONS

### 10MAGLOCK3ULDS

<b>Door Configuration</b>	Single, surface mount
<b>Holding Force</b>	600 lbs
<b>Input Voltage</b>	12/24 VDC (UL Listed power supply recommended)
<b>Current Draw</b>	.50 A @ 12 VDC .25 A @ 24 VDC
<b>Dimensions</b>	9.84 in x 1.65 in x 1.02 in
<b>Relock Time Delay</b>	0-90 s
<b>Sensor</b>	Lock Status Sensor, Door Status Sensor
<b>Output Relay</b>	Up to 1 A @ 24 VDC

### 10MAGLOCK6ULDS

<b>Door Configuration</b>	Double, surface mount
<b>Holding Force</b>	600 lbs
<b>Input Voltage</b>	12/24 VDC (UL Listed power supply recommended)
<b>Current Draw</b>	1 A @ 12 VDC .50 A @ 24 VDC
<b>Dimensions</b>	19.76 in x 1.65 in x 1.02 in
<b>Relock Time Delay</b>	0-90 s
<b>Sensor</b>	Lock Status Sensor, Door Status Sensor
<b>Output Relay</b>	Up to 1A @ 24 VDC


### 10MAGLOCK1ULDS

<b>Door Configuration</b>	Single, surface mount
<b>Holding Force</b>	1200 lbs
<b>Input Voltage</b>	12/24 VDC (UL Listed power supply recommended)
<b>Current Draw</b>	.50 A @ 12 VDC .25 A @ 24 VDC
<b>Dimensions</b>	9.84 in x 1.65 in x 1.02 in
<b>Relock Time Delay</b>	0-90 s
<b>Sensor</b>	Lock Status Sensor, Door Status Sensor
<b>Output Relay</b>	Up to 1 A @ 24 VDC


### 10MAGLOCK5ULDS

<b>Door Configuration</b>	Double, surface mount
<b>Holding Force</b>	1200 lbs
<b>Input Voltage</b>	12/24 VDC (UL Listed power supply recommended)
<b>Current Draw</b>	1 A @ 12 VDC .50 mA @ 24 VDC
<b>Dimensions</b>	19.76 in x 1.65 in x 1.02 in
<b>Relock Time Delay</b>	0-90 s
<b>Sensor</b>	Lock Status Sensor, Door Status Sensor
<b>Output Relay</b>	Up to 1 A @ 24 VDC


## PRODUCT FAMILY




10MAGLOCK3ULDS  
600 LB, SINGLE



10MAGLOCK6ULDS  
600 LB, DOUBLE



10MAGLOCK1ULDS  
1200 LB, SINGLE



10MAGLOCK5ULDS  
1200 LB, DOUBLE

## BEA'S COMPLETE MAGLOCK PORTFOLIO

Maglock Portfolio	Description
<b>Non UL Series</b>	Single or Dual surface mount 100 lbs, 600 lbs and 1200 lbs 12/24 VDC
<b>UL Series</b>	Single or Dual surface mount 600 lbs and 1200 lbs 12/24 VDC Adjustable relock time display (0-9 secs) With or without Door Status Sensor
<b>UL Certified Gatelock</b>	Single, front or side mount NEMA 4 1200 lbs 12/24 VDC With or without monitoring
<b>Delayed Egress Maglock</b>	NFPA/ADA compliant kits available
<b>Request to Exit</b>	NFPA/ADA compliant kits available

www.BEAinc.com

© 2015 BEA, Inc. All rights reserved.

## UL LISTED MAGLOCKS WITH DS

MAGLOCKS WITH ADJUSTABLE RELOCK TIME DELAY, LOCK STATUS SENSOR & DOOR STATUS SENSOR

BEA, Inc.  
RIDC Park West  
100 Enterprise Drive  
Pittsburgh, PA 15275-1213

Customer Service: 800.523.2462  
Technical Support: 800.407.4545

