




923/923P/923PW NARROW INDOOR/OUTDOOR EntryCheck™

Distributor Discount Code JK LIST

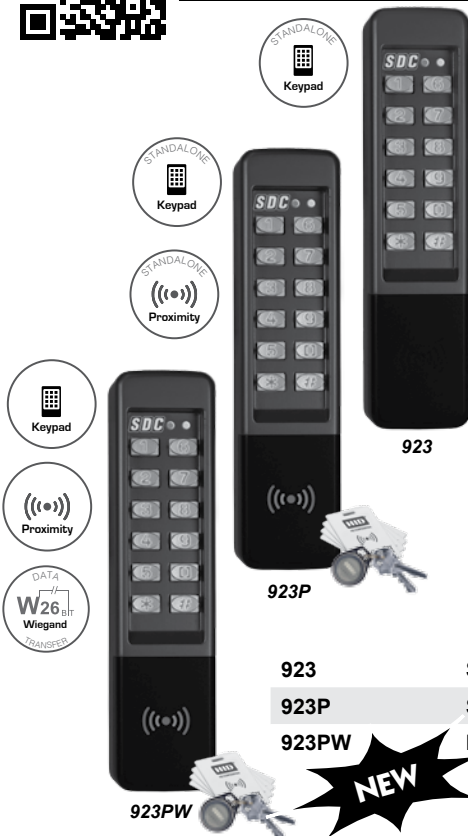

The 923 Series EntryCheck™ narrow stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand
Current: 30mA typical, 150mA maximum - 60mA max for wiegand
Outputs (923/923P): Relay 1 - SPDT 5 Amps @ 30VDC
 Relay 2 - SPDT 2 Amps @ 30VDC
 Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature: -20°F to +130°F (-30°C to +54°C)
Operating Humidity: 5% to 95% non-condensing
Housing: 1-3/4"W x 7-5/16"H x 1-3/8"D

923	Stand alone digital keypad, narrow	200.00
923P	Stand alone digital keypad, narrow, with Prox Reader	475.00
923PW	Digital keypad, narrow, with Prox Reader, Wiegand output	475.00

CARDS AND KEY FOBS

see page 11



921P/924P INDOOR/OUTDOOR 2-PIECE EntryCheck™

Distributor Discount Code JK LIST



The 921P and the 924P EntryCheck™ stand-alone digital keypad with Prox Reader and Controller (2-piece configuration) are designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC
Current: 60mA typical, 150mA maximum
Outputs: Relay 1 - SPDT 5 Amps @ 30VDC
 Relay 2 - SPDT 2 Amps @ 30VDC
 Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Operating Temperature: -20°F to +130°F (-30°C to +54°C)
Operating Humidity: 5% to 95% non-condensing
Housing: 921P: 3"W x 5-3/4"H x 1-7/16"D 924P: 1-3/4"W x 7-5/16"H x 1-3/8"D

921P	Stand alone, surface mount digital keypad, with Prox Reader and Controller	575.00
924P	Stand alone, surface mount digital keypad, narrow, with Prox Reader and Controller	600.00

CARDS AND KEY FOBS

see page 11

SDC

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012



920/920P/920PW INDOOR/OUTDOOR EntryCheck™

Distributor
Discount Code

JK

LIST



920



920P



920PW



The 920 Series EntryCheck™ stand-alone digital keypad is designed to control access of a single entry point with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand (920PW)

Current: 30mA typical, 150mA maximum - 60mA max for wiegand

Outputs (920/920P): Relay 1 - SPDT 5 Amps @ 30VDC

Relay 2 - SPDT 2 Amps @ 30VDC

Switch to Common Outputs 3 & 4 - 100mA @ 30VDC

Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)

Operating Humidity: 5% to 95% non-condensing

Housing: 3"W x 5-3/4"H x 1-7/16"D

920	Stand alone digital keypad	175.00
920P	Stand alone digital keypad with Prox Reader	390.00
920PW	Digital keypad with Prox Reader, Wiegand output	390.00

CARDS AND KEY FOBS

see page 11



925/925P/925PW INDOOR/OUTDOOR Shroud EntryCheck™

Distributor
Discount Code

JK

LIST



925



925P



925PW



The 925 Series EntryCheck™ elevates the robustness of the indoor/outdoor 920 keypad with a heavy metal privacy and rain shroud. Perfect for post mount applications.

ELECTRICAL SPECIFICATIONS (Keypad)

Voltage: 12/24 VAC/DC — 5-16 VDC for wiegand (925PW)

Current: 30mA typical, 150mA maximum - 60mA max for wiegand

Outputs (925/925P): Relay 1 - SPDT 5 Amps @ 30VDC


Relay 2 - SPDT 2 Amps @ 30VDC

Switch to Common Outputs 3 & 4 - 100mA @ 30VDC

Operating Temperature: -20°F to + 130°F (-30°C to + 54°C)

Operating Humidity: 5% to 95% non-condensing

Shroud Dimension: 4-1/16"W x 6-1/8"H x 2-5/8"D

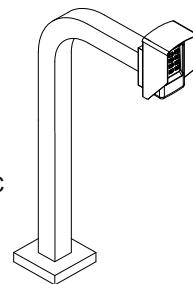

925	Stand alone digital keypad with privacy shroud	271.00
925P	Stand alone digital keypad with Prox Reader and privacy shroud	486.00
925PW	Digital keypad with Prox Reader, Wiegand output, and privacy shroud	486.00

CARDS AND KEY FOBS

see page 11