

25 Series Electric Strike

The SDC 25 Series Electric Strike is a Centerline Latch Entry* strike designed for use with Cylindrical lockset with up to 5/8" (15mm) throw latchbolts. The compact low profile design with an internally mounted solenoid and factory supplied mounting tabs enable quick and easy installation where jamb space is limited. The heavy duty construction makes the 25 Series ideal for high traffic installations.


*Centerline Latch Entry: The latch must enter at the strike "Centerline" located exactly between the top and bottom of the strike faceplate. Refer to strike installation instructions and template to determine strike location prior to frame preparation for New and Retrofit installations.

Not recommended for wood applications.




FEATURES

- Fail-Secure, reversible for failsafe operation
- For 1/2" latch or 5/8" latch with 1/8" door gap
- Latch status output
- Non-handed, reversible
- All stainless steel parts with durable diecast body for corrosion resistance
- 630 Stainless steel standard finish

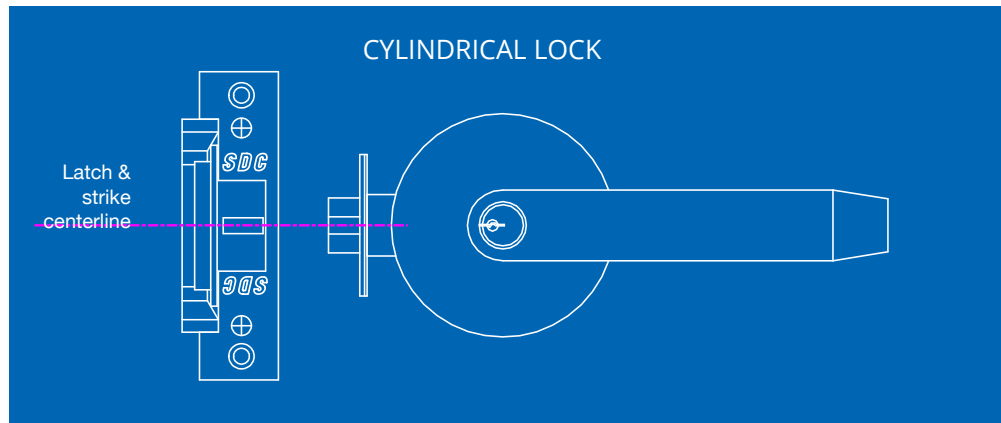

INSTRUCTIONS

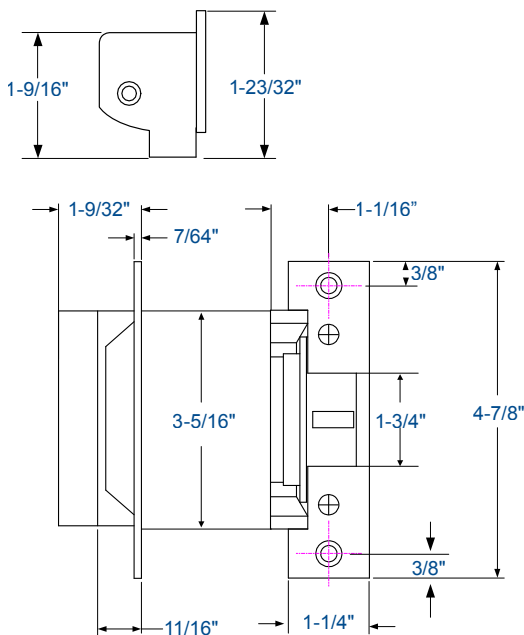

MODEL
25-4U
 4-7/8" (124mm) faceplate for aluminum, and hollow metal frames.

ACCESSORIES
RMB Buzzer 12/24V AC/DC operation
BR64XL Rectifier for AC operation

SPECIFICATIONS

| | |
|--------------|--------------------------------|
| Input | 200/100 mA @ 12/24VDC |
| Latch Status | SPDT, 3 Amp @ 30VDC |
| Dimensions | 1-1/4" W x 4-7/8" H x 1-1/4" D |





920 IPRW Wiegand Access Control Keypad or Reader



IPPro IP-based Access Control Controller



602RF 1 Amp, 12/24 VDC Class 2 Output Power Supply