

MODEL	A	B	C
TSH	9	5	2.125
NOTE: ALL DIMENSIONS IN INCHES.			

## EXIT DEVICE TSH-CL

### Features

- Replacement for any pull or push device on a door
- Activates a DPST 2 amp rated relay
- No moving parts
- 16 ft. 6 conductor cable and armored door cord
- 12 or 24 VDC
- Low current draw 40 mA at rest 5 mA when active
- UL Listed


**Operating Temperature**  
0 to 43C [32 to 110F]

### How to Order

<u>Part #</u>	<u>Description</u>
<b>TSH-CL</b>	Touch Sense Handle Clear Anodized
<b>TSH-BK</b>	Touch Sense Handle Black Anodized

### Architectural Specifications

- A. The Touch Sense Handle shall be produced by an ISO 9001 certified manufacturer.

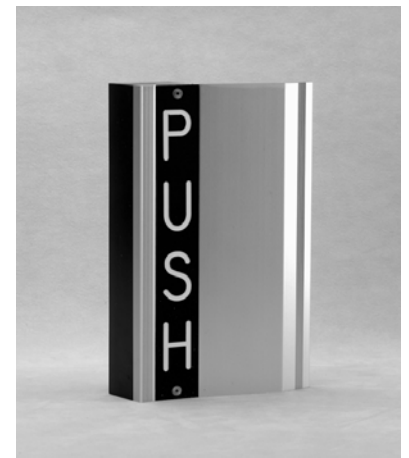

## EXIT DEVICE TSH-CL (cont'd)

- B. The exit device shall employ an anodized aluminum finish and is intended to be a direct replacement for any pull or push device on an swinging door.
- C. It shall activate a DP/ST 2 Amp rated relay when touched (no mechanical movement) which will allow free egress.
- D. The exit device shall have a backup push button, 16' ft. of 20AWG 6 conductor cable and a Stainless Steel - 630/US32D armored door cord shall be included with the handle.
- E. The device shall operate on either 12 or 24 VDC