


## Self-Adhesive Silicone Gasketing



**5050B** Brown  
**5050C** Charcoal  
**5050W** White  
**5050T** Tan  
**5050CL** Clear

Available in 17', 20',  
21', 25' and 300' rolls

\*Clear not available  
in 21'

### Silicone Bulb Fire and Smoke Seal



**Edge Sealing System - Category "G" for 20 minute rated category B wood doors perimeter application up to:**

single swing 4'0 x 8'0  
pairs 8'0 x 8'0  
use 9550 at the meeting edge of pairs





**Smoke and Draft Control - Category "H"**

Up to 3 hours Hollow Metal fire doors  
Up to 90 minutes Wood fire doors



Meets requirements of RoHS Directive

See adhesive specifications on page G9

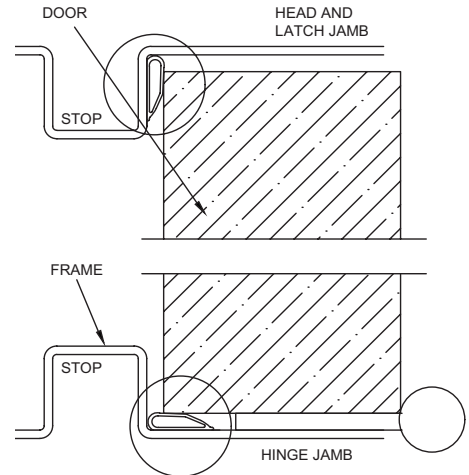

**ANTI-LIG 5050B** Brown  
**ANTI-LIG 5050C** Charcoal  
**ANTI-LIG 5050W** White  
**ANTI-LIG 5050CL** Clear

Available per foot (bulk) or in  
stock length 300' rolls.

### Anti-ligature Silicone Bulb Fire and Smoke Seal

Anti-ligature feature has serrations every 8" designed to break apart preventing it from being used to hang or strangle.

Applications include psychiatric facilities, prisons and other treatment facilities.

Installs as a continuous length providing the same sealing properties for light, sound, air and smoke as our original 5050.



**Edge Sealing System - Category "G" for 20 minute rated category B wood doors perimeter application up to:**

single swing 4'0 x 8'0  
pairs 8'0 x 8'0  
use 9550 at the meeting edge of pairs



**Smoke and Draft Control - Category "H"**

Up to 3 hours Hollow Metal fire doors  
Up to 90 minutes Wood fire doors



Meets requirements of RoHS Directive

See adhesive specifications on page G9

