HES[®] 1006 Electric Strike

800.348.2263 accesshardware.com

ACCESS

Works with all cylindrical and mortise locksets with or without a deadbolt



Also available in a Complete One Box Solution

The strongest, most versatile electric strike available.

The HES 1006 Series Electric Strike is the strongest and most versatile electric strike available. The dual interlocking plunger design and heavy duty stainless steel construction enables it to exceed every standard developed for electric strikes. With multiple faceplate options, the HES 1006 will fully accommodate every lock designed to work within an ANSI 4-7/8" strike plate. Tested to exceed 3,000 lbs of static strength, 350 ft-lbs of dynamic strength and factory tested to exceed 1 million cycles of operation, the HES 1006 is in a class of its own.

ASSA ABLOY

Features

Standard Features

- Stainless steel construction
- Tamper resistant
- Static strength 2,500 lbs
- Dynamic strength 350 ft-lbs (fail secure)
- Endurance 1 million cycles
- Fail secure (standard)
- Non-handed
- Non-nanueu
 Accommodator
- Accommodates up to 1" [25.4mm] deadbolt
- Plug-in connector
- Full keeper shims for horizontal adjustment
- Trim enhancer
- Strike body depth 1-11/16" [43mm]
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of HES SMART Pac® III extends the warranty to 10 years)


Optional Features

- LBM Latchbolt monitor
- LBSM Latchbolt strike monitor
- Fail safe
- Interchangeable faceplates
- Monitor switches may not work with all faceplate options

Accessories

- HESCUT-MTK Metal template kit
- 2005M3 SMART Pac® III
- 1000-102 Rain guard
- 1006-103 Full keeper shims
- **1000-104** Lip extension trim adapter
- 1006-105 Trim enhancer BLK (goof plate)
- 1006-109 Trim adapter
- 1000-110 Replacement strike plate
- 1000-130 KD filler plate
- 150 Strike latch guard



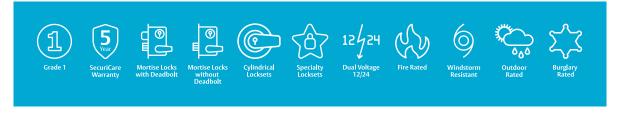

Specifications

Certifications

- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 listed .
- **RoHS** compliant •
- UL 10C fire rated, 3-hour single door (fail secure only)
- UL 10C fire rated, 1-1/2 hour double door (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant •
- ANSI/SDI A250.13 windstorm resistant
- Florida Building Code approved TAS 201, 202, 203
- ANSI-ASTM E330
- Sustainability documentation

Frame Application

- Metal •
- Wood

Electrical (DC Continuous Duty)

- Dual Voltage 12/24 VDC
- 450 mA at 12 VDC / 250 mA at 24 VDC

NOTE: DC must be well filtered with ripple less than 1 volt 12 ms.

Dimensions

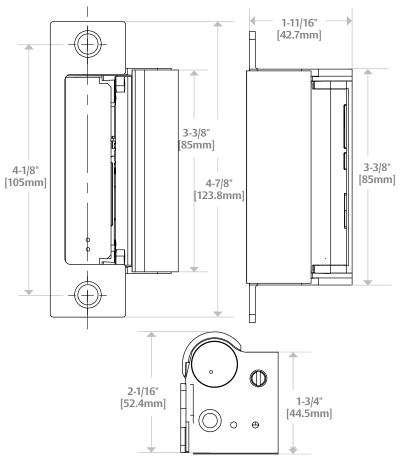


Diagram shown with DB faceplate

How to Order

	SERIES	MODEL	FAIL SECURE / SAFE	FINISH*	OPTION (S)
	1006	—	— F	- 630	– LBM
1006	Strike; faceplates ordered separately CI	CS* Complete Electric Strike; includes the SMART Pac III and J, KD, KM, HM, ND faceplates and brackets	(blank) Fail Secure	ecure 605 Bright Brass LBM Latchbolt M	LBM Latchbolt Monitor**
			(standard)	606 Satin Brass	LBSM Latchbolt Strike
			F Fail Safe	612 Satin Bronze	Toned Stainless Steel
		CLB* Complete Electric Strike for latchbolt locks; includes J, K, KD and KM faceplates		613 Bronze Toned	
				629 Bright Stainless Steel	
				630 Satin Stainless Steel	
		CDB* Complete Electric Strike for Deadbolt Locks; includes the ND and HM faceplates		BLK Black	
		CAS* Complete Electric Strike for Deadbolt Locks; includes the N, ND and NM faceplates			

*Complete Pacs are only available in the 630 finish. ** Not available with CS, CDB, or CAS

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.

US assaabloyesh.com | 800 626 7590 | customerservice.esh@assaabloy.com Canada assaabloydss.ca | 800 461 3007 | sales.dss.ca@assaabloy.com

Updated 7/7/20 Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2020, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction


HES 1006CS Smart Strike[™]

The Complete One Box Solution for all cylindrical and mortise locksets, with or without a 1" deadbolt

The HES 1006CS Smart Strike includes a HES 1006 electric strike body and SMART Pac[®] III plus faceplates and brackets that can provide the same function as any of the following options:

JOption	HOption	HTD Option
KOption	HD Option	N Option
KD Option	HM Option	ND Option
KM Option	HT Option	NM Option

Compatible Locksets

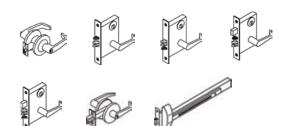

HES 1006CAS Complete for Recapture

The Complete One Box Solution for deadbolt recapture

The HES 1006CAS Smart Strike includes a HES 1006 electric strike body plus faceplates and brackets that can provide the same function as any of the following options:

A Option	N Option	TOption
AD Option	ND Option	TD Option
AM Option	NM Option	

Compatible Locksets



HES 1006CLB Complete for Latchbolt Locks

The Complete One Box Solution for all cylindrical and mortise locksets

The HES 1006CLB includes the HES 1006 electric strike body plus faceplates and brackets that provide the same function as any of the following options:

J Option

tion

KD Option

K Option

KM Option

Compatible Locksets



HES 1006CDB Complete for Deadbolt Locks


The Complete One Box Solution for all locksets with a 1" deadbolt

The HES 1006CDB includes the HES 1006 electric strike body plus faceplates and brackets that provide the same function as any of the following options:

H Option	HT Option	ND Option
HD Option	HTD Option	NM Option
HM Option	N Option	


Compatible Locksets



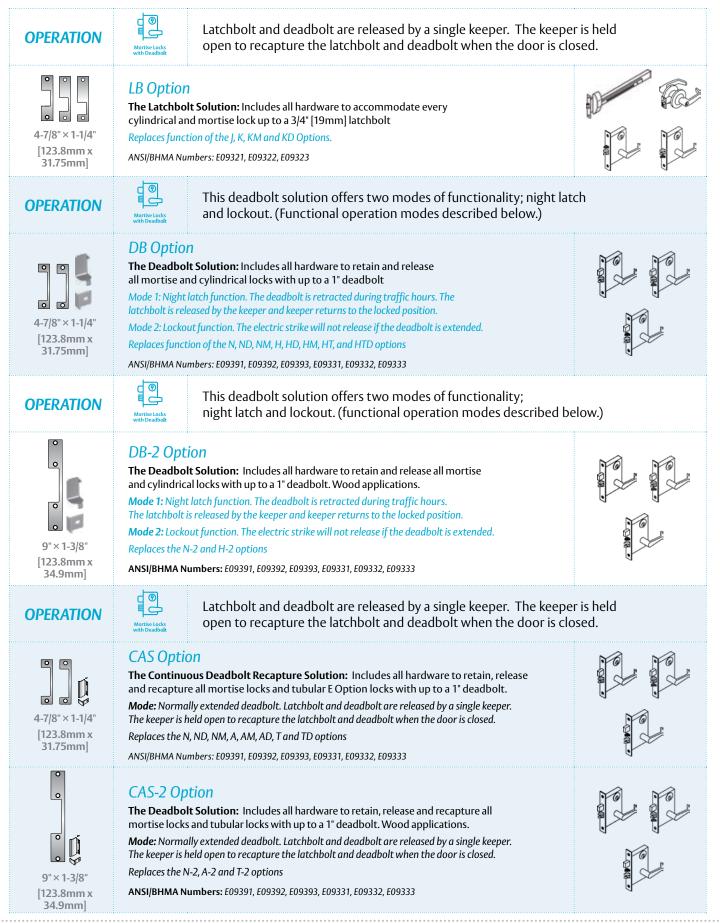

US assaabloyesh.com | 800 626 7590 | customerservice.esh@assaabloy.com Canada assaabloydss.ca | 800 461 3007 | sales.dss.ca@assaabloy.com Updated 7/7/20 Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2020, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited.

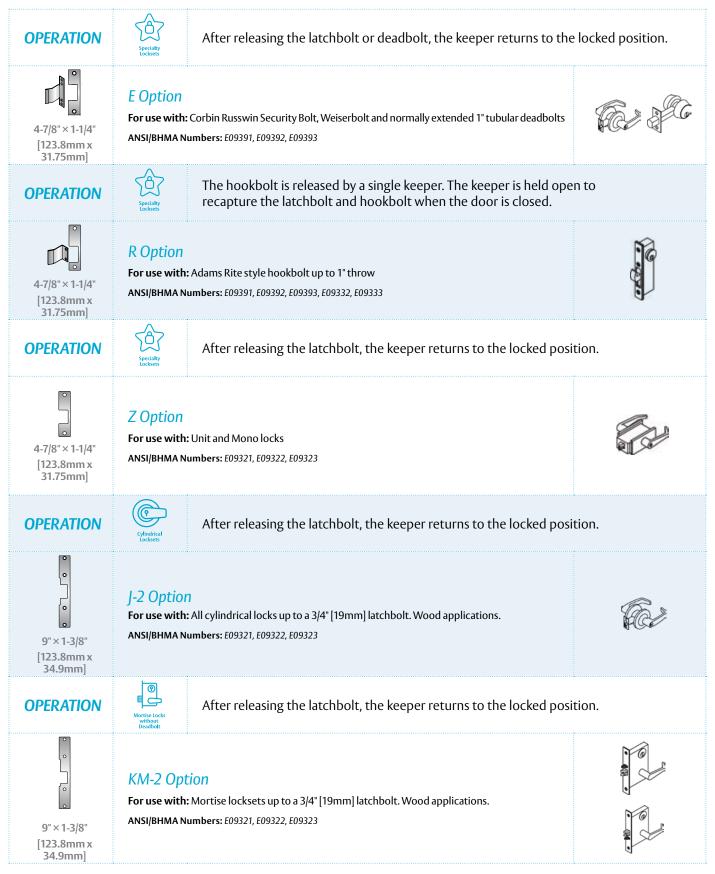

"For use with" information is offered as a recommendation only. Reference should be made to the lockset manufacturer for proper installation instructions necessary to meet compatibility requirements.

OPERATION	After releasing the latchbolt, the keeper returns to the locked position.		
4-7/8"×1-1/4" [123.8mm x 31.75mm]	J Option For use with: Cylindrical locksets up to 3/4" [19mm] throw and all locksets with center-lined bolts. Compatible locksets: All brands of cylindrical latchbolts ANSI/BHMA Numbers: E09321, E09322, E09323	F CP	
OPERATION	After releasing the latchbolt, the keeper returns to the locked posi	tion.	
4-7/8" × 1-1/4" [123.8mm x 31.75mm]	KD Option For use with: Mortise locksets up to 3/4" [19mm] throw latchbolt. Compatible locksets: Dorma 9500, Jackson, Sargent (7700 & 8100), Schlage, Yale (8700) ANSI/BHMA Numbers: E09321, E09322, E09323		
4-7/8"×1-1/4" [123.8mm x 31.75mm]	 KM Option For use with: Mortise locksets up to 3/4" [19mm] throw latchbolt. Compatible locksets: Accurate, Arrow, Baldwin, Best, Corbin Russwin, Falcon, Marks, PDQ, Sargent (7800, 8200 & 9200), Yale (8800) ANSI/BHMA Numbers: E09321, E09322, E09323 		
OPERATION	Lockout function. The electric strike will not release if the deadbol extended. The deadbolt is retracted during traffic hours. The latch released by the keeper. The keeper returns to the locked position.		
4-7/8"×1-1/4" [123.8mm x 31.75mm]	 HM Option For use with: Mortise locksets with a 1" deadbolt. Strike will not release when deadbolt is extended. Compatible locksets: Accurate, Arrow, Baldwin, Best, Corbin Russwin, Falcon (45H, 47H, 34H & 37H), Marks, Omnia, PDQ, Sargent (7800, 8200 & 9200), Yale (8800) ANSI/BHMA Numbers: 09391, E09392, E09393, E09331, E09332, E09333 		
4-7/8"×1-1/4" [123.8mm x 31.75mm]	 HTD Option For use with: Mortise locksets with a 1" deadbolt and no deadlatch or a center positioned deadlatch. Strike will not release when deadbolt is extended. Compatible locksets: Sargent (7700 & 8100), Schlage, Yale (8700) ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333 		

"For use with" information is offered as a recommendation only. Reference should be made to the lockset manufacturer for proper installation instructions necessary to meet compatibility requirements.

US assaabloyesh.com | 800 626 7590 | customerservice.esh@assaabloy.com Canada assaabloydss.ca | 800 461 3007 | sales.dss.ca@assaabloy.com Updated 7/7/20 Patent pending and/or patent www.assaabloydss.com/patents


Copyright © 2020, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited.

OPERATION	Night latch function. The deadbolt is retracted during traffic hou Mortise Locks With Deadbolt	
4-7/8"×1-1/4" [123.8mm x 31.75mm]	ND Option For use with: Mortise locksets with a deadbolt used for night latch function only. Compatible locksets: Sargent (7700 & 8100), Schlage, Yale (8700) ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333	
4-7/8"×1-1/4" [123.8mm x 31.75mm]	 NM Option For use with: Mortise locksets with a deadbolt used for night latch function only. Compatible locksets: Accurate, Arrow, Baldwin, Best, Corbin Russwin, Falcon (45H, 47H, 34H & 37H), Marks, Omnia, PDQ, Sargent (7800, 8200 & 9200), Yale (8800) ANSI/BHMA Numbers: E09391, E09392, E09393, E09331, E09332, E09333 	

The following legacy faceplate options remain available for order. Suggestions are provided below for more versatile options.

H Option	replaced by HM Option	A-2 Option	replaced by CAS-2 Option
HD Option	replaced by HTD Option	H-2 Option	replaced by DB-2 Option
HT Option	replaced by HTD Option	N-2 Option	replaced by DB-2 Option
K Option	replaced by KM Option	T-2 Option	replaced by CAS-2 Option
K-2 Option	combined into KM-2 Option		

HES 1006 Series Faceplate Option Dimensions

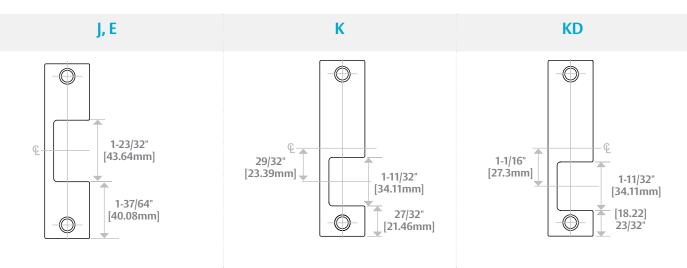

"For use with" information is offered as a recommendation only. Reference should be made to the lockset manufacturer for proper installation instructions necessary to meet compatibility requirements.