

AO19 SERIES® HOW TO ORDER

DETEX CORPORATION


Automatic Operator

Select from list below and fax to 800-653-3839


NOTE: Operator always mounted inside of building
Viewed from mounting side of door

Single Door ☐ 39.5" ☐ Right Hand ☐ Push ☐ AL
Qty _____ ☐ 45.5" ☐ Left Hand ☐ Push 11" + reveal ☐ BZ
☐ 52" ☐ Pull Max reveal on a pull 2.5"


LH Push




RH Push



LH Pull




RH Pull




Double Door (Twin) ☐ 75.5" ☐ Push ☐ AL ☐ Simultaneous
Qty _____ ☐ 92" ☐ Push 11" + reveal ☐ BZ ☐ Independent
☐ 100" ☐ Pull Max reveal on a pull 2.5"

Double Door (Twin) Push

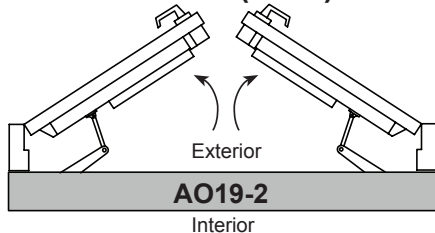


Double Door (Twin) Pull

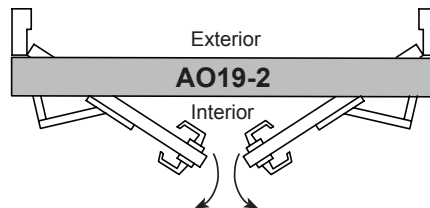


Double Egress (Dual) Door ☐ 75.5" ☐ Right Hand ☐ Push ☐ AL ☐ Simultaneous
Qty _____ ☐ 92" ☐ Left Hand ☐ Pull ☐ BZ ☐ Independent
☐ 100" Max reveal on a pull 2.5"

Dual Egress Door RH

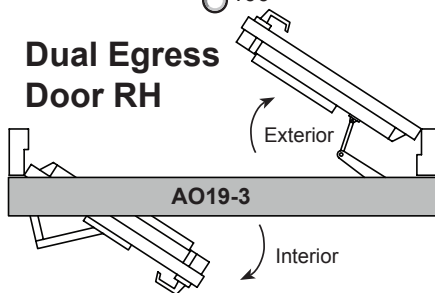

Dual Egress Door LH

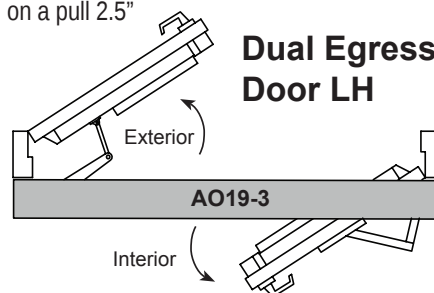

Distributor: _____ Date: _____

Ph # _____ Email: _____ PO # _____

Comments: _____

Model # _____ x (length) _____ x (push/pull/dual) _____ x (AL/BZ) _____

AO19 SERIES®

AO19-1

Low Energy Automatic Door Operators for Single Doors

The AO19 Series Automatic Operator for single doors is an easy to install, heavy duty product for high use and high abuse low energy applications. The AO19 Series meets requirements for ANSI/BHMA A156.19 (American National Standard for Power Assist and Low Energy Power Operated Doors) and provides standard features that meet the requirements of the American Disabilities Act.



AO19-1 RH Push

Shown with 21 Series
Electric Latch
Retraction (ER)

Benefits

- Economical operator provides safe and easy access in medium to high-traffic and security areas
- Provides ADA compliant access to handicap applications
- Quiet operation
- 115VAC power plug-in mounted in header
- Hanger plate allows quick installation
- Self-contained unit in an extruded case allows easy access for maintenance and adjustments
- Works with existing access control, locking and computer signal devices
- Easy manual use
- Reduced service calls due to heavy-duty construction
- 3-way low-voltage ON/OFF/HOLD switch for ease of service and setup
- Can be installed and adjustments can be made prior to electrician connecting building power

Features

- Available in single, pair (twin) for independent, simultaneous and dual egress openings
- Power close applies a reverse power to aid in latch check position. Must be selected to activate.
- Single voltage source required to operate
- Adjustable delayed activation for sequenced vestibule doors
- Reverse on obstruction stalls a door during closing cycle and re-activates to open if an obstruction is sensed anytime before the latch position. Must be selected to activate.
- Adjustable closing speed
- Push & Go (Use for Handicap) activates when door is manually pushed to open. Must be selected to activate.
- Electric lock relay provides an adjustable delay before door opens to unlock an electric strike, maglock or other types of electric locks - prevents binding

Mechanical Options

- LH Push - Left Hand Push
- RH Push - Right Hand Push
- LH Pull - Left Hand Pull
- RH Pull - Right Hand Pull
- 39.5" - Fits above most 36" doors
- 45.5" - Fits above most 42" doors
- 52" - Fits above most 48" doors

Accessories

- 104792 - Wireless Button Package (includes 2 push plates, 2 mounting boxes and 1 receiver)

Call for available activation options

- NG-IR-A - Hardwired Touchless Activation Switch
- NXG-SW - Wireless Touchless Activation Switch

- DS-3681-630 - Electric Strike, cylindrical
- PB-2048-3 - Mushroom switch, hard-wired

Technical Information

Power Requirements

- 115VAC 60 HZ 3 amps

Motor

- 115VDC rectified
- 1/8 hp
- 60:1 gearbox

- For use on doors 300 lbs or less

Module -

- Activation input terminals
- Form C lock switch terminals
- Safety lock-out built in
- 17 additional features standard on board

Enclosure -

- 7" h x 4 1/2" d
- Approximately 50 lbs
- Aluminum extrusion


- Push reveal depth up to 11" with standard arm. Extended arm available.
- Pull reveal depth 2-1/2"

Finishes

- AL - 204-Ri Clear: Arch. Class II anodized coating, AA-M12C22A31


- BZ - 313-Ri Dark Bronze: Arch. Class II Anodized coating, AA-M12C22A32

Riser Diagram

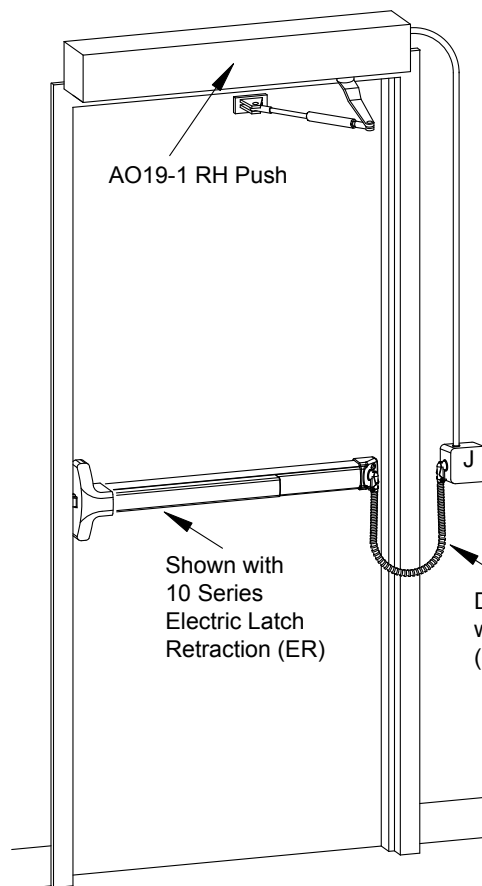

Typical Application

Handing Diagram

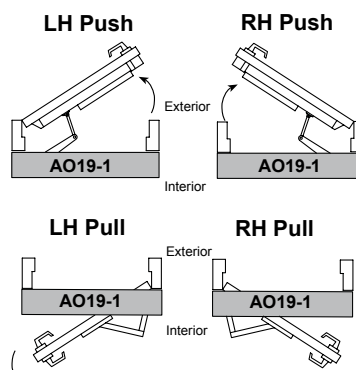

Listings and Approvals



Certified to ANSI/UL 325
Tested - ANSI 156.19



Meets ADA requirements



3-Hour Fire Listed

Detex Limited Warranty

3 Year Mechanical / 1 year Electrical
Limited Manufacturer's Warranty

Where Trust is Built™
DETEx®
Life Safety, Security and Security Assurance

Detex Corporation
302 Detex Drive
New Braunfels, Texas 78130-3045 USA
PH. (830) 629-2900
(800) 729-3839
FAX (800) 653-3839
<http://www.detex.com>
USA Sales:
marketing@detex.com
International Sales:
export@detex.com



Cancer & Reproductive Harm - www.detex.com/prop65