



# RS Series

## 200 and 300 models

The RS Series of surface mounted electric rim strikes are designed with endurance and flexibility. Available to accommodate rim exit devices with a 1/2" or 3/4" throw pullman latchbolt and multiple spacers are included for superior installation. Four attachment points to the frame provide for extra durability.



### Features and benefits

- Surface mounted for easy installation
- Slotted mounting holes for increased adjustment flexibility
- Multiple spacers included for easy installation
- Sleek cover case design
- Field selectable fail-safe and fail-secure (fail-secure default), with simple and easy screw position change, non-fire rated models
- Field selectable 12/24 VDC
- Built-in voltage spike suppressor
- Suitable for rain or dust environments

### Options

- RS200 Series accepts 1/2" throw pullman latchbolt
- RS300 Series accepts 3/4" throw pullman latchbolt
- Offered in both 630/US32D and 613/US10B finishes
- RS300 available in fire rated version

### Accessories

- Buzzer rectifier with timer (TBR-100)

### Specifications

- UL1034 Burglary-resistant electric locking mechanisms, listed
- UL294 (indoor), listed
- UL10C Fire Rated, 90 min. RS300-F models only
- Static strength of 1500 lb. static load, UL certified
- Dynamic strength of 70 ft.-lb. dynamic load, UL certified
- 250,000 cycles endurance, UL certified

### Electrical

- Dual-voltage 12 VDC @ .54A / 24 VDC @ .27A

### Finishes



630/US32D  
Satin stainless steel




613/US10B  
Dark bronze


**RS Series**  
**200 and 300 models**

**Spacers**

Included with strike

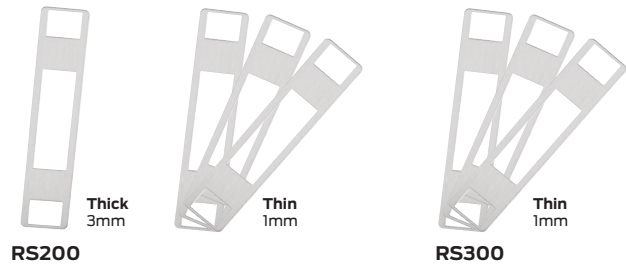


Strike dimensions

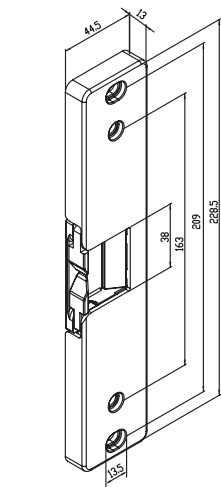

**RS200**

9" x 1 3/4" x 1/2"  
 (229mm x 44.5mm x 13mm)

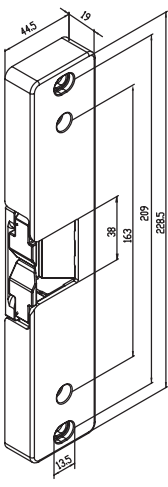

**RS300**

9" x 1 3/4" x 3/4"  
 (229mm x 44.5mm x 19mm)

**RS Series list prices**

| Product name | Product description                              | Finish    | Voltage   | UPC          | List price |
|--------------|--------------------------------------------------|-----------|-----------|--------------|------------|
| RS200-32D    | Rim strike - 1/2"; Depth with spacers            | 630/US32D | 12/24 VDC | 043156646029 | \$475.00   |
| RS200-10B    | Rim strike - 1/2"; Depth with spacers            | 613/US10B | 12/24 VDC | 043156646036 | \$520.00   |
| RS300-32D    | Rim strike - 3/4"; Depth with spacers            | 630/US32D | 12/24 VDC | 043156646050 | \$485.00   |
| RS300-10B    | Rim strike - 3/4"; Depth with spacers            | 613/US10B | 12/24 VDC | 043156646067 | \$530.00   |
| RS300-F-32D  | Fire rated rim strike - 3/4"; Depth with spacers | 630/US32D | 12/24 VDC | 043156001552 | \$550.00   |
| RS300-F-10B  | Fire rated rim strike - 3/4"; Depth with spacers | 613/US10B | 12/24 VDC | 043156001569 | \$595.00   |