


Specifications:

- Each cluster contains six (6) relay modules that can easily be separated.
- 12VDC or 24VDC selectable operation.
- Current draw 50mA.
- 10A/120VAC or 28VDC SPDT contacts.
- Screw terminals accommodate up to 12 gauge wire.

Board dimensions: (L x W x H): 2" x 1.6" x 0.75" (50.8mm x 40.6mm x 19.05mm).

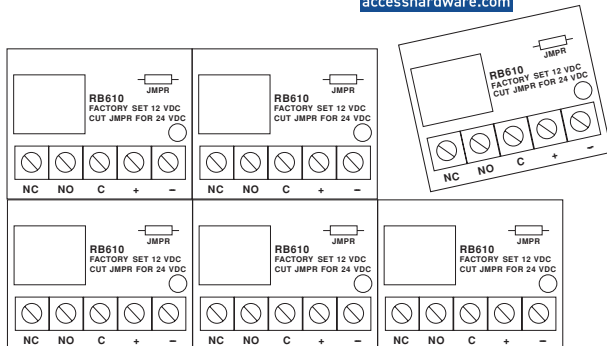

Installation Instructions:

- In order to break the relay cluster apart (if desired), put a pencil on a flat surface, position the scoring line on top of the pencil and push lightly. Relay should easily break away from cluster.
- Connect trigger input or voltage source to screw terminals marked [POS (+) & NEG (-)]. (Unit is factory set for 12VDC operation - cut jumper for 24VDC operation).
- Connect screw terminals marked [NC] (Normally Closed) or [NO] (Normally Open) and [C] (Common) to operate desired devices.

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.