


CM-6000


LOCKING MUSHROOM PUSH SWITCHES

FEATURES

- LARGE LOCKING, RED OR BLACK BUTTONS
- IDEAL FOR LOCK-OUT OR EMERGENCY SHUT-DOWN APPLICATIONS
- 2³/₈" (60MM) DIAMETER
- PUSH ON, TURN KEY TO RELEASE
- VANDAL AND TAMPER RESISTANT
- MOUNTED ON HEAVY 1/4" THICK ALUMINUM PLATE
- STACKABLE CONTACTS CAN CONTROL 6 DISTINCT FUNCTIONS
- UL/CSA APPROVED SWITCHES, RATED 10 AMPS @ 125V AC
- COLOR CODED 18 AWG SPADE CONNECTIONS
- BRUSHED ALUMINUM FINISH
- FAST AND EASY TO INSTALL

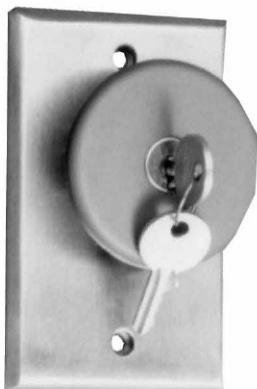

CM-6000

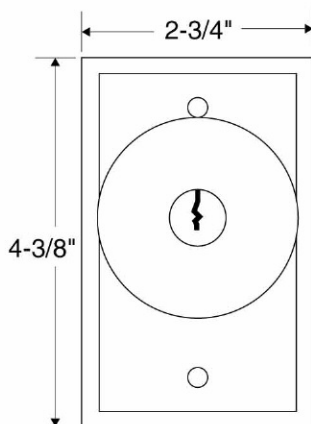

CM-6000

DESCRIPTION

Camden Door Controls CM-6000 Series Locking Push Switches are specially designed and manufactured for lock-out or emergency applications. Once pushed, the button latches, and cannot be reset unless the key is inserted and turned in the center locking cylinder.

Buttons are available in either red or black, with a 2³/₈" (60mm) diameter. They are supplied with a 1/4" thick, brushed aluminum single gang faceplate.

The switches are UL/CSA approved, rated 10 amps @ 125V AC.

APPLICATION

Camden Locking Push Switches are ideal for lock-out or emergency shut-down applications. Also ideal for use on emergency doors, fire exits, or other applications where a positive latching action is desired.

LOCKING MUSHROOM PUSH SWITCHES

ARCHITECTS / ENGINEERS SPECIFICATIONS

The locking push switches to be used throughout the site/complex shall be CAMDEN DOOR CONTROLS CM-6000 series Locking Exit Switches.

The button shall be 2³/₈" (60mm) in diameter, and designed to be easy to activate. The switch shall have a positive latching action. Once the button is depressed, it locks in place, and cannot be reset unless a key is inserted and turned, in the middle of the switch. The faceplate shall be constructed of 1/4" thick aluminum, and shall be supplied with stainless steel Torx or snake eye security screws.



Rating for all electrical contacts shall be a minimum of 10 amps @ 125V AC. The switch used shall be a UL/CSA approved type, supplied with color coded leads. The switch assembly shall be modular, allowing for up to six distinctive functions upon activation of the push button.

ORDERING INFORMATION

All CM-6000 Illuminated Push Switches come with a 2³/₈" (60mm) locking palm button (red or black), brushed aluminum faceplate, 2 socket/slotted screws, and 2 tamperproof screws.

| ITEM NUMBER | DESCRIPTION |
|-------------|---|
| CM-6030 | PUSH ON/KEY TO RELEASE, N/O, SPST MAINTAINED, RED |
| CM-6040 | PUSH ON/KEY TO RELEASE, N/C, SPST MAINTAINED, RED |
| CM-6050 | PUSH ON/KEY TO RELEASE, N/O AND N/C, DPST MAINTAINED, RED |

For Color, add:
'B' for BLACK button

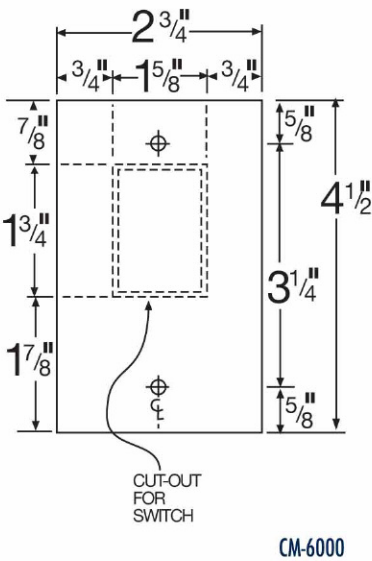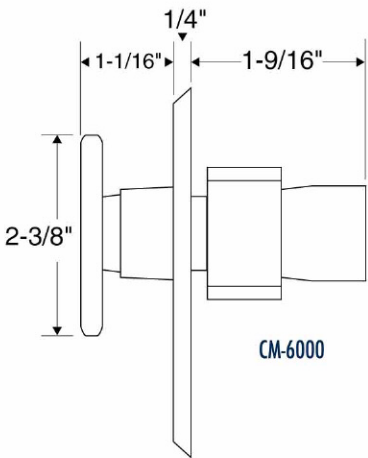

CM-6000

