




CX-1000/75 MINIMINDER TIME DELAY


INSTALLATION INSTRUCTIONS

Adjustable delay from 1-15 seconds (Potentiometer)
 Turn clock-wise to increase time; counter clock-wise to decrease time
 Relay: SPDT 3 amp at 24 VDC
 Operating Voltage: 12 or 24 VDC
 Current: Idle 10MA, operating 40MA

FAIL SECURE APPLICATION
 NORMALLY DE-ENERGIZED

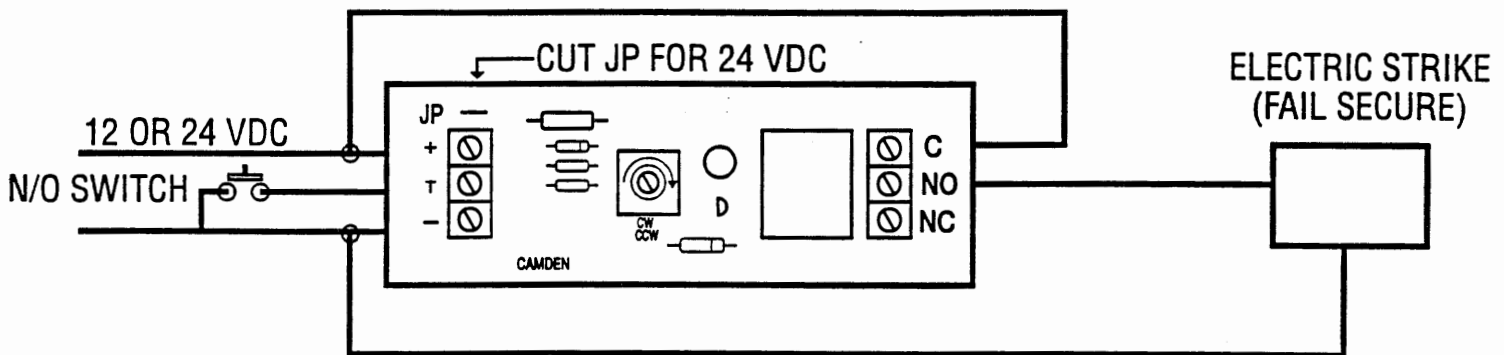

FAIL SAFE APPLICATION
 NORMALLY ENERGIZED

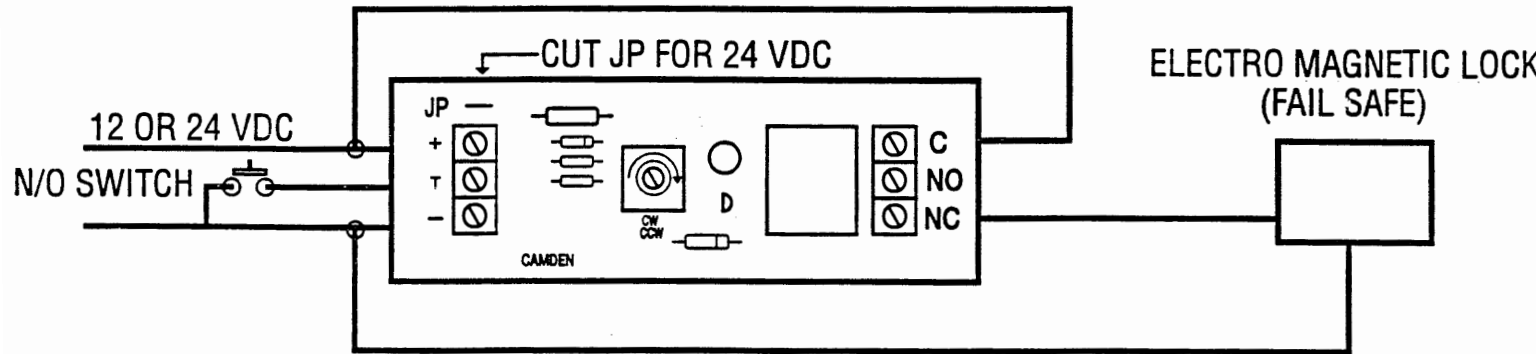

SPECIFICATION:

Dimensions: 2.6" x 0.9" x 0.7"

5151 Everest Drive, Unit 6, Mississauga, Ontario, L4W 2Z3
 Tel: 1-877-226-3369 or 905-366-3377; Fax: 905-366-3378