

CX-1000/75 MINIMINDER

FEATURES

- ADJUSTABLE DELAY FROM 1-15 SECONDS
- ULTRA COMPACT DESIGN
- 12 - 24 VOLTS DC
- ACCEPTS N.O. DRY INPUTS
- SPDT CONTACTS RATED AT 2 AMPS @ 28VDC


DESCRIPTION

CAMDEN DOOR CONTROLS CX-1000/75 MiniMinder Is a basic easy-to-operate delay on release timer. The delay is adjustable from 1 to 15 seconds, and is accessed by a pot on the board. The Form C relay output is rated at 2 amps @ 28 VDC. The input must be a momentary dry contact such as a push or exit switch.


APPLICATION

The MiniMinder is ideal for (de) energizing an electric strike or electromagnet for an adjustable time period. It is also suitable for handicap automatic door operators that do not have built in time delays.

The compact design makes the relay ideal for installations where space is at a premium, for example within the switch box itself.

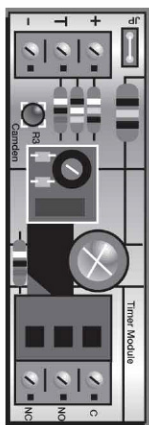


CX-1000/75

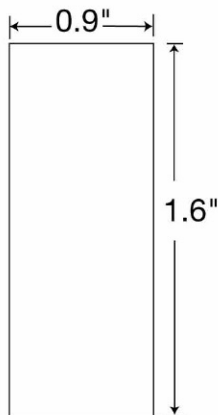

CX-1000/75



TYPICAL APPLICATION

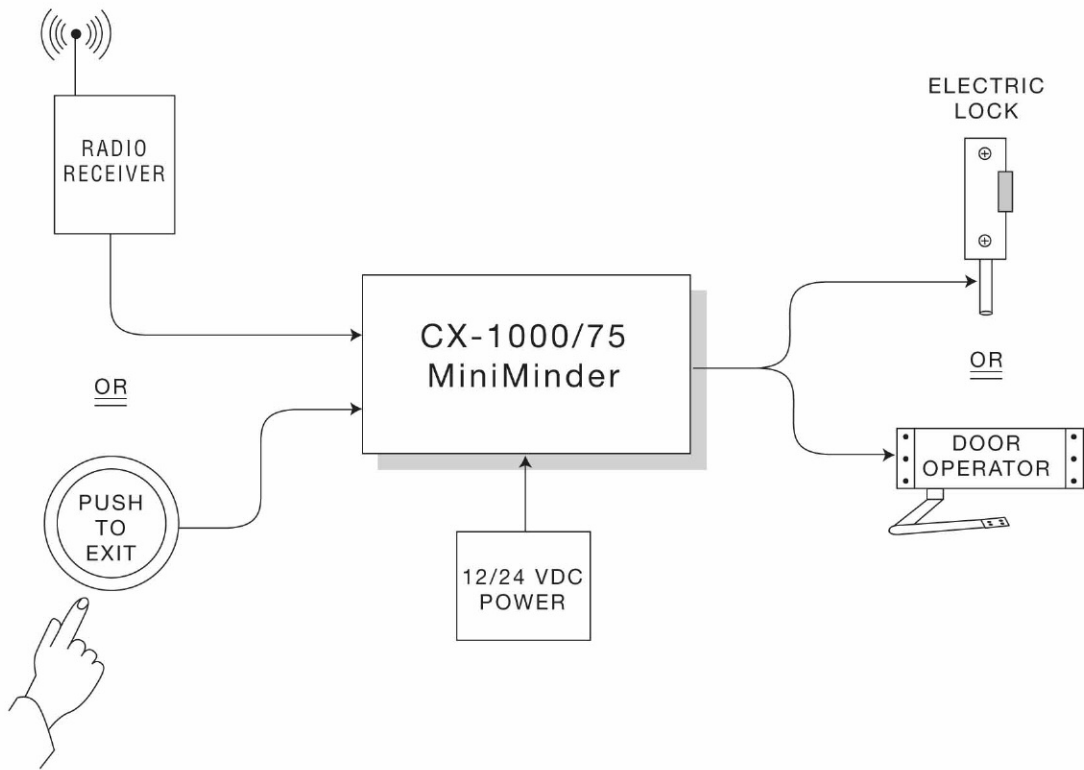

SPECIFICATIONS

MODEL	CX-1000/75
SIZE	1.6" L X 0.9" W
MOUNTING	DOUBLE SIDED FOAM TAPE
ENCLOSURE	NONE
OPERATING VOLTAGE	12 - 24 VOLTS DC
CURRENT DRAW	10 mA IDLE, 40 mA OPERATING
RESPONSE TIME	.03 SECONDS
INPUT	N.O. DRY CONTACT
RELAY OUTPUT	FORM C (SPDT)
CONTACT RATING	2 AMPS @ 277VAC/30 VDC
ELECTRICAL LIFE	100,000 @ RATED CAPACITY
TIME DELAY	1 - 15 SECONDS

CX-1000/75

