



CX-1000/77 MAXIMINDER

FEATURES

- ADJUSTABLE DELAY FROM 1 SECOND TO 4 HOURS
- DIP SWITCH PROGRAMMING FOR ACCURACY
- LED FOR VISUAL RELAY CONFIRMATION
- ACCEPTS N.O. DRY INPUTS
- NORMAL/FAIL SAFE OUTPUT
- DPDT CONTACTS RATED AT 4 AMPS @ 28 VDC
- 12 OR 24 VDC

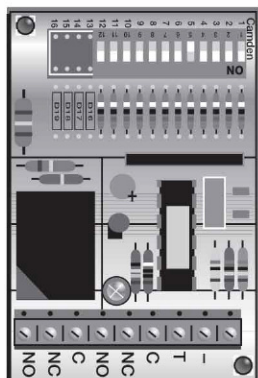

CX-1000/77

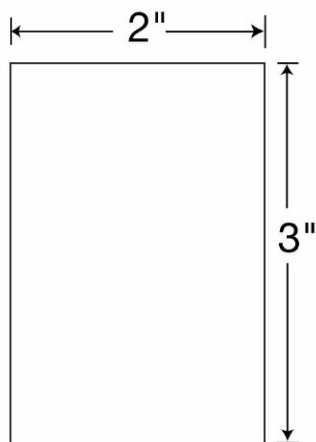

CX-1000/77

DESCRIPTION

CAMDEN DOOR CONTROLS CX-1000/77 MaxiMinder is a highly accurate programmable delay-on-release timer. The delay is set by dipswitches and is adjustable from 1 second to 4 hours! The 2 Form C outputs are rated at 5 amps @ 28 VDC, and can be programmed for normal or fail safe operation. A red LED confirms the relay status. The compact circuit board features a terminal strip with easily identified markings.

APPLICATION


The MaxiMinder is ideal for (de) energizing an electric strike or electromagnet for an adjustable and highly accurate time period.

It is also suitable for handicap automatic door operators that do not have built in time delays.

The MaxiMinder can also be used wherever a precision extended timer is required, and many other timing functions.



TYPICAL APPLICATION

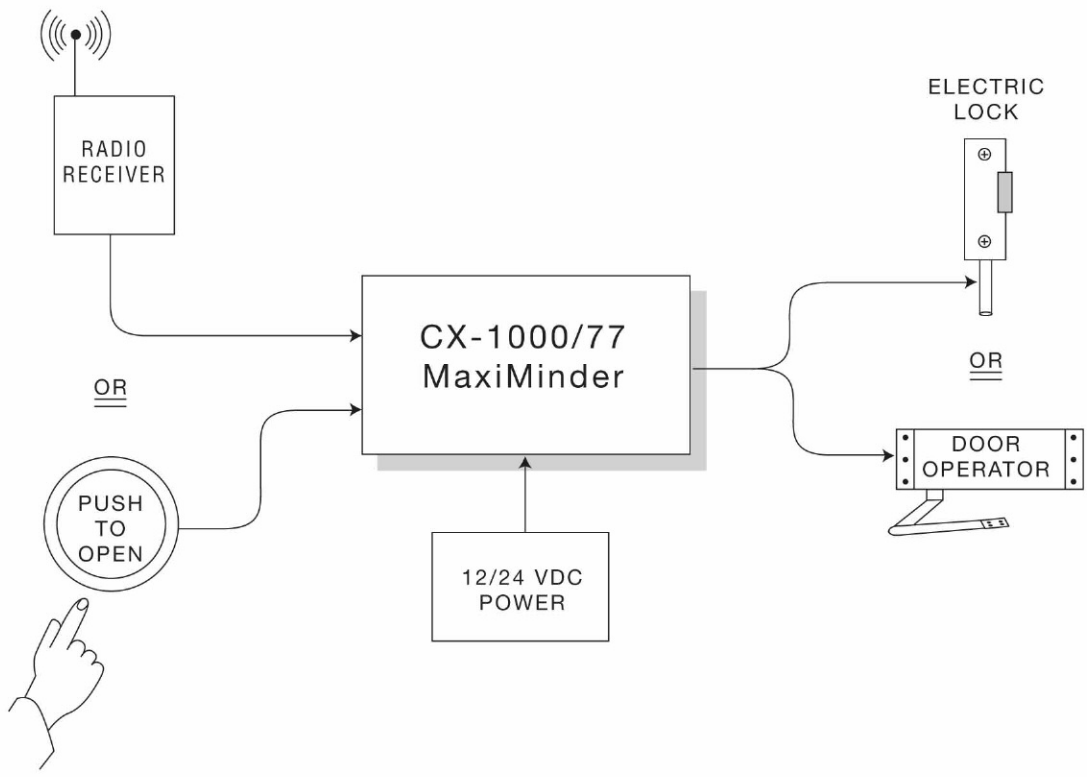

SPECIFICATIONS

MODEL	CX-1000/77
SIZE	3" L X 2" W
MOUNTING	DOUBLE SIDED FOAM TAPE
ENCLOSURE	NONE
OPERATING VOLTAGE	12 OR 24 VOLTS DC
CURRENT DRAW	12 mA IDLE, 60 mA OPERATING
RESPONSE TIME	.03 SECONDS
INPUT	N.O. DRY CONTACT
RELAY OUTPUT	2 X FORM C (DPDT)
CONTACT RATING	5 AMPS @ 277VAC/30 VDC
ELECTRICAL LIFE	100,000 @ RATED CAPACITY
TIME DELAY	1 SECOND TO 4 HOURS

CX-1000/77

