


Latching Panic Exit Saddles

- Used in conjunction with surface applied vertical rod exit device, or as a stop and a seal at the bottom of door.
- For offset applications, use an elevator (see page 37).

2001_T


AVAILABLE FINISHES: A, D, G
Allow 1/4" door clearance.

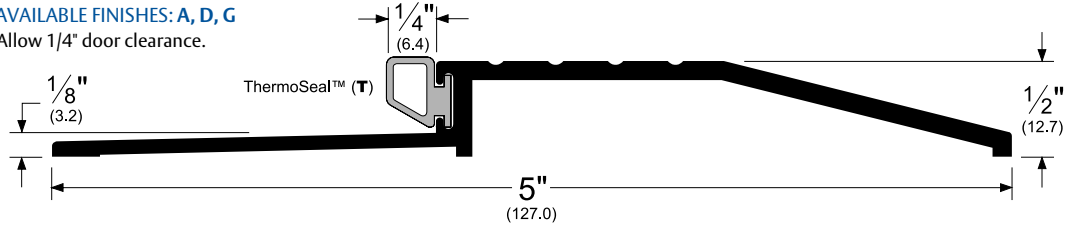

Special purpose bumper threshold designed for use with a low 1/4" to 3/8" undercut door.


2002_Q

AVAILABLE FINISHES: A, D, G
Allow 1/4" door clearance.

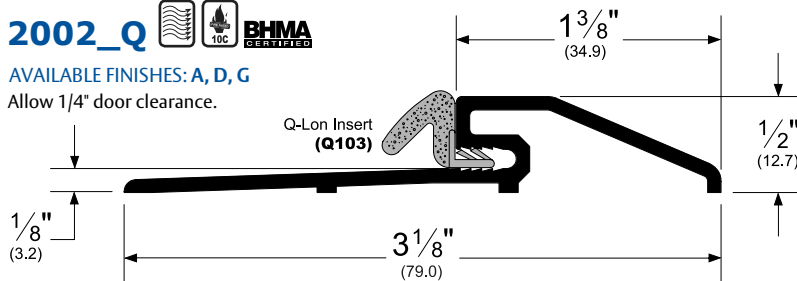


2005_T

AVAILABLE FINISHES: A, B, D, G
Allow 3/8" door clearance.

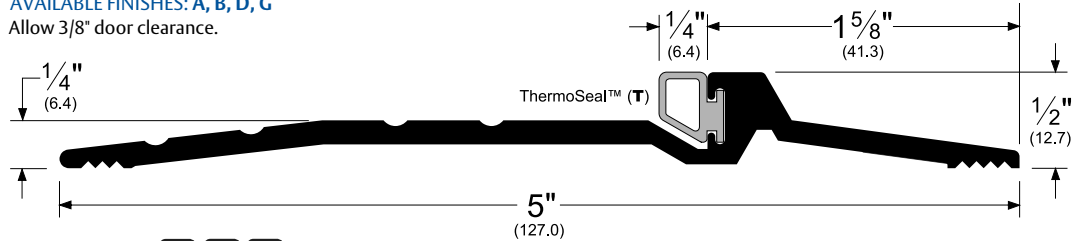


2006_T

AVAILABLE FINISHES: A, D, G
Allow 3/8" door clearance.

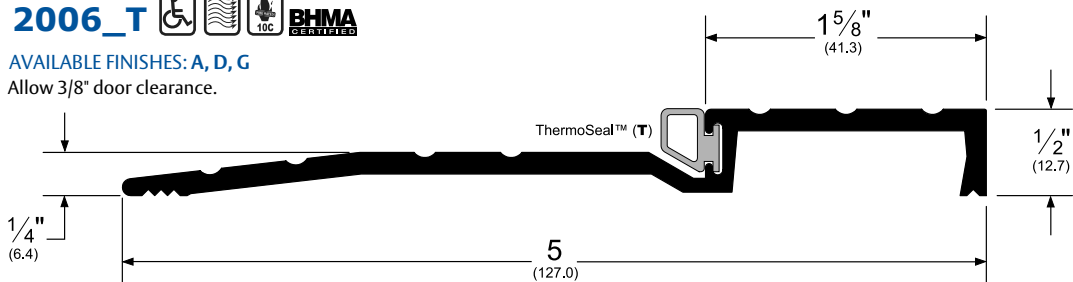

179_T

AVAILABLE FINISHES: A, B, D, G
Allow 1/2" door clearance.

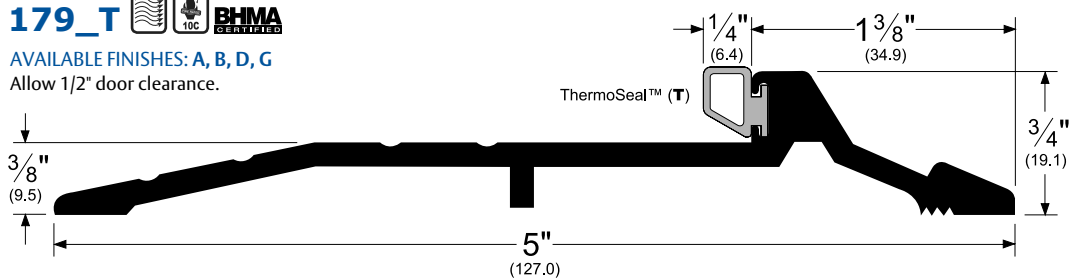

NOTE: Products shown in this section may not be drawn to scale.

ALTERNATE INSERTS



pile (P)

179_P 
2001_P 

2005_P 
2006_P 



vinyl (V)

179_V 
2001_V 

2005_V 
2006_V 

▲ AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

A (Mill Finish Aluminum) • B (Mill Finish Extruded Bronze [Brass]) • D (Dark Bronze Anodized) • G (Gold Anodized)

NOTE: G, SN are available with limited inventory