



## ROFU<sup>®</sup> HIGH SECURITY ELECTRIC STRIKE MODEL 1460/3460


1460 AND 3460 - SERIES, FACEPLATE SIZE 1<sup>3</sup>/<sub>8</sub>" x 9"

**MODEL 1460** — Fail - Secure (Non Fail - Safe)

**MODEL 3460** — Fail - Safe

Electric strikes for use with mortise locksets with and without deadbolts.

For Commercial, New or Retrofit Uses

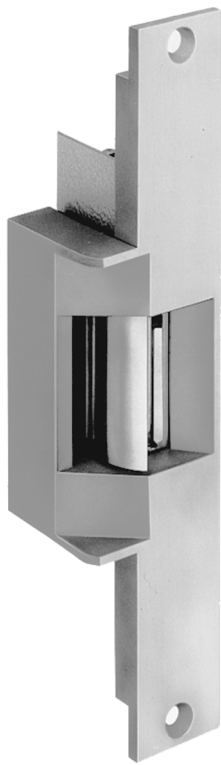

**1460/3460**  
**Non -Handed**

### Standard Features

- Stainless Steel Faceplate
- Frame Type - Hollow Metal, Aluminum or Wood
- Corrosion - Resistant case and moving parts.
- Tamper Strength Test - 1700 lbs (765kg)
- Cycle Test 500,000 cycles
- Keeper Depth - **5/8"** Maximum Latch Projection Possible with 1/8" Door/Frame Clearance - **3/4"**
- Strike Depth 1.50" Overall
- Reversible - Non Handed. (w/o deadbolt)
- **Fully Tamper Proof Horizontal Adjustment**  
To compensate for misalignment and warpage.
- 1<sup>1</sup>/<sub>2</sub>" Jamb Modification
- Limited Warranty - 36 Months

### Available in the following Voltages and Finishes:

Specify Finish           xUS32D, xUS40 or xUS3 (Plated)

Voltage, Fail Secure   x01=8-16VAC/3-6VDC, x05=12VAC/12VDC, x08=24VAC/24VDC

Voltage, Fail Safe       x06=12VDC, x09=24VDC

### Optional Features:


- Cutout for deadbolt (Specify 1460B-LH or RH / 3460B-LH or RH )




Made in the USA



**LINE ART FOR 1460/3460**

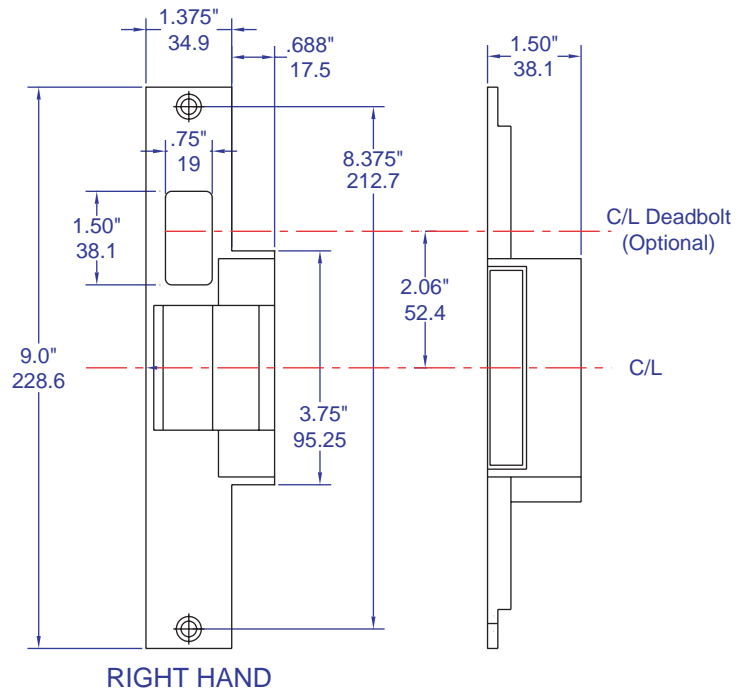

**HOLLOW METAL  
JAMB PREPARATION**

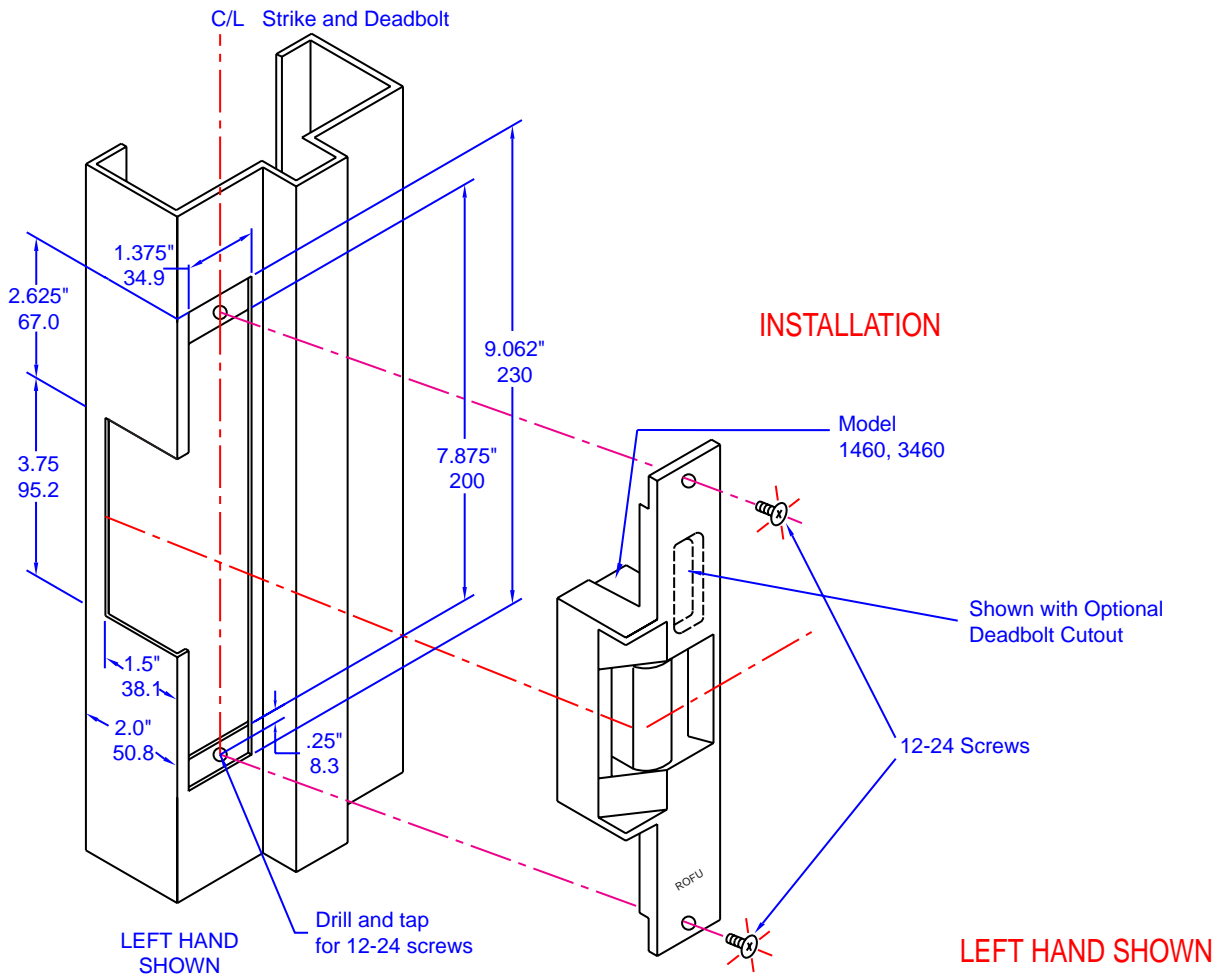

NOT TO SCALE - TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE

**ROFU High Security Strike  
Model # 1460B  
Shown with the special Baldwin Prep.**

Shown here is the  
1460B-LH (B=optional dead bolt cutout)  
with an additional modification in the ramp  
specially for the Baldwin Mortise Lock.  
Available in a RH version also.

