



ROFU® ELECTRIC STRIKE MODEL 1804




1804 - SERIES, FACEPLATE SIZE $1\frac{7}{16}" \times 7\frac{15}{16}"$

MODEL 1804 — Fail - Secure (Non Fail - Safe)

Electric strikes for use with mortise and cylindrical locksets.

For Commercial and Residential, New or Retrofit Uses

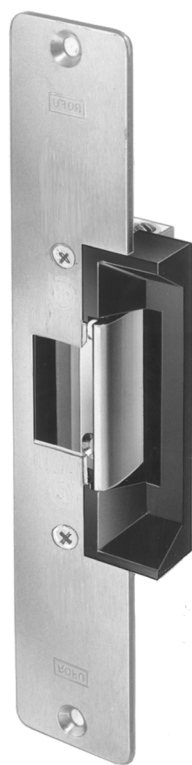

1804
Non-Handed

Standard Features

- **Retrofits into the most popular prep in the industry!**
- Anodized Aluminum Faceplate
- Frame Type - Hollow Metal, Aluminum or Wood
- Corrosion - Resistant case and moving parts.
- Tamper Strength Test - 1000 lbs (454kg)
- Cycle Test 500,000 cycles
- Keeper Depth - **9/16"** Maximum Latch Projection possible with 1/8" Door/Frame Clearance - **11/16"**
- Strike Depth 1.50" Overall
- Reversible - Non Handed
- Adjustable Keeper (FAFIX)
- Built-in MOV for Spike Suppression
- Limited Warranty - **36 Months**

Available in the following Voltages and Finishes:

Specify Finish	xUS28, US10B or xUS4
Voltage, Fail Secure	x01=8-16VAC/3-6VDC (Intermittent Duty)
	x04=12VAC/12VDC (Intermittent Duty)
	x05=12VDC (Continuous Duty)
	x07=24VAC/24VDC (Intermittent Duty)
	x08=24VDC (Continuous Duty)



Line Art for 1804


Added benefits to this series:

The 1800 Series has a different Lip bracket.

The Difference:

ROFU's standard .75" bevel has been shortened to .65" so that the strike will retrofit into the most popular jamb preps!

ALUMINUM JAMB PREPARATION

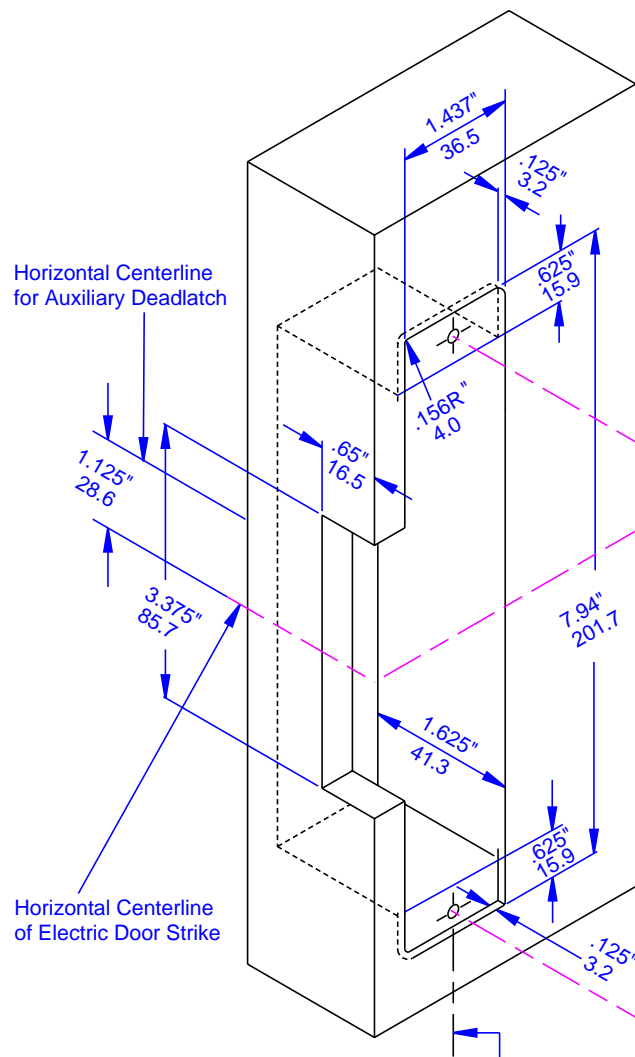

The mounting screws of the electric strike and the mounting screws of the deadlatch are located on the vertical centerline.

INSTALLATION

