


Electric Strikes For Rim Panic Devices

NO CUTTING!!!

4800

4801

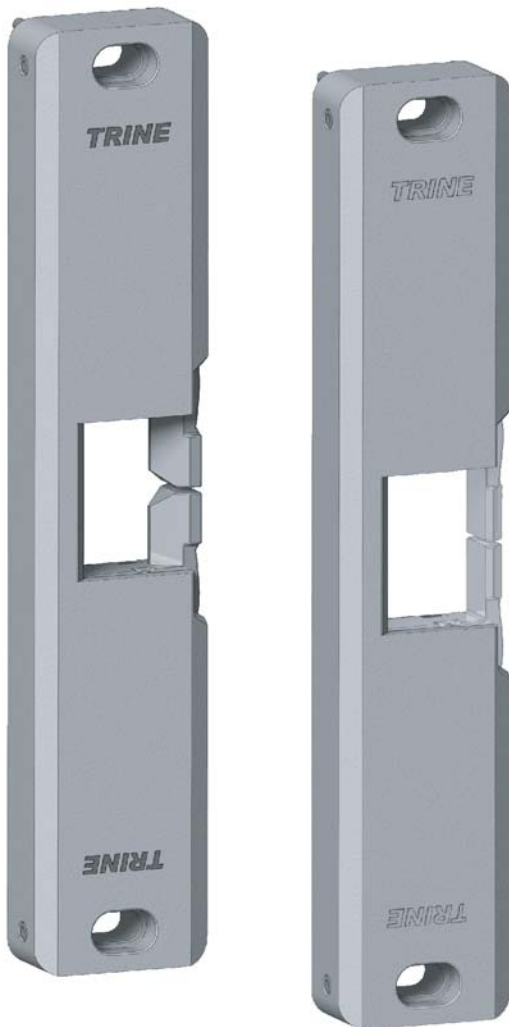

BUILT-IN ELECTRONICS

SURFACE MOUNTING:

Unit only requires the drilling of (3) holes*

***ANCHORING SYSTEM: (Included)**

Uniquely designed optional four pin anchoring system provides additional support beyond the standard two tapped mounting holes.

ONE PIECE LOCKING MECHANISM:

Our patented locking mechanism has one mechanism, which provides incredible strength, durability and reliability due to fewer moving parts.

STAINLESS STEEL CONSTRUCTION

FAIL SECURE/FAIL SAFE FIELD SELECTABLE

1,500,00 + LIFE CYCLE TESTED

3,000 + LBS. HOLDING FORCE

STEEL SPACER:

Comes with a 1/8" thick spacer for installations that require mounting the strike closer to the panic bar. The spacer is also used as template during installation.

12 THRU 24 AC/DC OPERATING VOLTAGE:

Built in electronics **AUTOMATICALLY** allow use of **12 THRU 24 AC/DC** with surge and kick-back protection.

VOLTAGE	PULL IN/HOLD AMPS	DUTY	SOUND
12DC	.566/.217	Intm./Cont.	Silent
24DC	.253/.099	Intm./Cont.	Silent
12AC	.509/.181	Intm./Cont.	Silent
16AC	.402/.149	Intm./Cont.	Silent
24AC	.215/.087	Intm./Cont.	Silent

AVAILABLE FINISHES:

US3 - Bright Brass **US10B** - Dark Bronze
US4 - Satin Brass **US26** - Bright Chrome
US10 - Satin Bronze **US32D** - Satin Stainless Steel

HOW TO ORDER

Add the finish to the model number: ex: 4800-32D

* THE 4801 WORKS WITH THE SECURE BOLT™ & SQUARE BOLT™ EXIT DEVICES.

The Axion 4800 Series...Simple AND Smart



PREMIUM ELECTRIC STRIKES

COMPARISON CHART

4800 vs. 9600

FEATURE

TRINE

HES

*Information from manufacturer catalog

Frame cutting	None	None
Number of locking mechanisms	1	2
Number of holding points in mounting system	Up to 6	3
Operating Voltage	12 thru 24 AC/DC (only two wires to connect)	12 or 24 DC (Wires must be cut and tied off for 24 DC)
Built-in surge and kickback protection	Yes	No - Optional
Holding force	3000 + lbs.	1500 lbs.
Life cycles	1,500,000+	500,000
1/8" steel spacer plate included	Yes	No - Optional
Field Selectable Fail Safe/Fail Secure	Yes	Yes
Horizontal locking screws	Yes	Yes
Non Handed	Yes	Yes
Accommodating up to 3/4" Pullman Latch	Yes	Yes
Plug-in connectors	Yes	Yes
BHMA Grade 1	Yes	Yes



1440 Ferris Place, Bronx, NY 10461

p: 718.829.2332 f: 718.829.6405

www.trineonline.com