


IVES®

Power transfer pivot


Overview

Ives offers electrified intermediate power transfer pivots to transfer power and signals from the frame to the door. Pivots are generally used on heavier exterior door applications.

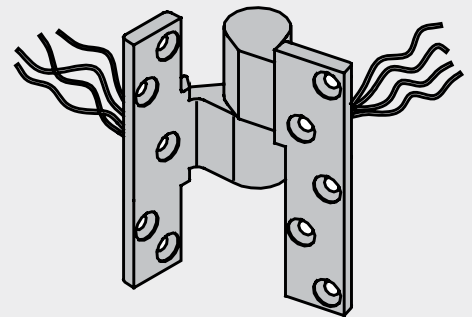

Features and benefits

- Use with 7215, 7226 or 7227 3/4" offset pivots
- Four wires, 28 gauge
- Optional 8 wire available
- Rated 50 VDC or VAC @ 3.5 amps
- Continuous or 16 amps pulse, maximum pulse 400 milliseconds
- Non-load bearing
- Use with 1 3/4" thick door minimum, 1/8" bevel in 2"

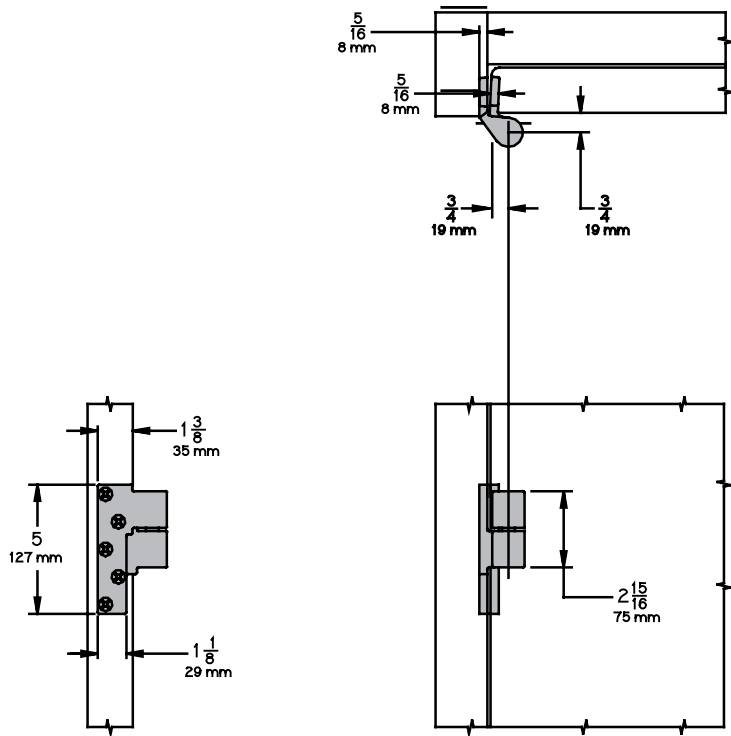

Finishes

Plate finishes - brass

US number	US3	US4	US10	US10B	US26	US26D
BHMA	605	606	612	613	625	626

Painted finishes - brass

US number	SP4	SP10	SP28	SP313	SPBLK
BHMA	706	691	689	695	622

Allegion, the Allegion logo, Ives and the Ives logo are trademarks of Allegion plc, its subsidiaries and/or affiliates in the United States and other countries. All other trademarks are the property of their respective owners.

About Allegion

Allegion (NYSE: ALLE) creates peace of mind by pioneering safety and security. As a \$2 billion provider of security solutions for homes and businesses, Allegion employs more than 7,800 people and sells products in more than 120 countries across the world. Allegion comprises 23 global brands, including strategic brands CISA®, Interflex®, LCN®, Schlage® and Von Duprin®. For more, visit www.allegion.com.

aptiQ ■ LCN ■ SCHLAGE ■ STEELCRAFT ■ VON DUPRIN



© 2014 Allegion
010117, Rev. 02/14
www.allegion.com/us