
1855S/1857S

MANUAL FLUSH BOLTS




Used to lock and unlock an inactive door when the active door is open. When the inactive door is closed, moving the lock lever up locks it and moving the lever down unlocks it. Meets FED SPEC 1049 : BHMA L14081: ANSI 156.16. UL Listed.

1855S SINGLE UNIT FOR METAL DOORS

- Non-handed
- 5/8" throw with 7/8" vertical adjustment
- Standard rod length is 12". Other lengths are available on request
- If pair is required, order 1855P
- Dust proof strikes - 1870 for floor and/or threshold, 1872 for threshold only
- Available in most architectural finishes

1857S SINGLE UNIT FOR WOOD DOORS

- Same features as 1855 with the addition of a special top guide for wood doors
- If pair is required, order 1857P
- Dust proof strikes - 1870 for floor and/or threshold, 1872 for threshold only

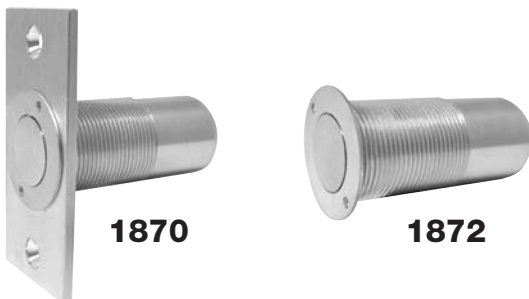

www.abhmfg.com
E-mail: abhinfo@abhmfg.com
Architectural Builders Hardware Mfg., Inc.
1222 Ardmore Ave., Itasca, IL 60143
630.875.9900; FAX 800.9FAXABH (932.9224)

© 2005 ABH Mfg., Inc.
Printed in USA 02/05

ABH[®]