



A505 Stainless Steel Pin & Barrel Continuous Hinge with 2 - Lip Edge Guard

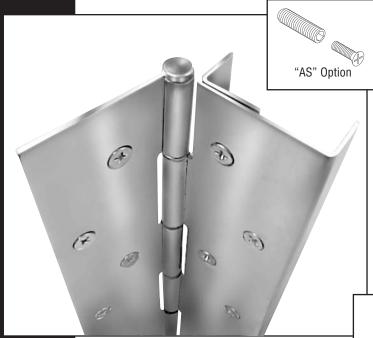

Standard Features

- Concealed
- · Welded End Pins Standard
- For 1-3/4" doors adjustable to accommodate slight variances in door thickness
- For high traffic, high abuse doors
- · Heavy-Duty 14 Gauge 304 Stainless Steel
- US32D Satin Stainless Steel finish
- · No exposed fasteners when door is closed
- Self-drilling machine screws and wood screws provided
- Supports door weights up to 600 lbs.
- 4'0" maximum door width
- Door edge lip on both faces of door to prevent costly damage
- For specialty door Use with A538CS or A538CB
- UL & ULC fire listed (see below)



- Welded Hospital Tip Suffix "HT"
- · Dutch Door Suffix "DD"

Standard Options

- Security Fasteners (Pin-in Torx)
- · Security Pins Suffix "SP"
- Adjustable Studs for correcting frame irregularities up to 3/8" - Suffix "AS"

- · Custom Lengths Specify Length
- · Custom Powder Coated Finishes
- Clinical Bearings Suffix "CB"
- · Raised Barrel Suffix "RB"

Electrical Options

- · Power Transfer Prep Suffix "PT"
- · Concealed Thru Wire
 - (2) 18ga. Wire Suffix "TW2"
 - (4) 28ga. Wire Suffix "TW4"
 - (8) 28ga. Wire Suffix TW8"
 - (12) 28ga. Wire Suffix "TW12"
- · EZ Connectors
 - (4) 28ga. Wire Suffix "EZ4"
 - (8) 28ga. Wire Suffix "EZ8"
 - (12) 28ga. Wire Suffix "EZ12"
- Electrical Access Prep Suffix "M"
- Exposed Monitoring Switch Suffix "ES"

Fire Rating- UL and ULC fire Listed
3 hours-hollow metal door mounted singly
90 min.-hollow metal and composite core wood fire door
20 min.-wood door

CROSS REFERENCE				
ABH	Markar	Roton	Stanley	Ives
Δ505	HG305	790-905	652	705

^{*} Brand names are trademarks or registered trademarks of their respective companies.

It is not assured nor suggested that any two products are exactly the same. The assessment of which products are most similar comes from information provided by trade sources.



Architectural Builders Hardware Manufacturing, Inc. 1222 Ardmore Ave., Itasca, IL 60143

Phone: 630-875-9900; FAX 800-932-9224 www.abhmfg.com • Email: abhinfo@abhmfg.com