

II-1300-13

**INSTALLATION INSTRUCTIONS FOR SERIES 1340 AUDIBLE ALARMS
COVERS THE FOLLOWING MODELS:**

- 1340-2 AUDIBLE ALARM, SINGLE GANG, WALL MOUNT
- 1340-3 HIGH SECURITY AUDIBLE ALARM, SINGLE GANG, WALL MOUNT

ELECTRICAL SPECIFICATIONS


- AUDIBLE ALARM RATED 2 -14 ma @ 4 -28 VDC (FILTERED),
TONE FREQUENCY: 2900HZ, SOUND INTENSITY: 64 - 78 dB

AUDIBLE ALARM

- THE AUDIBLE ALARM HAS POLORIZED WIRE LEADS
- RED WIRE LEAD IS (+) POSITIVE AND BLACK WIRE LEAD IS (-) NEGATIVE.
- MOUNTS IN A SINGLE GANG BOX WITH A DEPTH OF 2 1/8".



1340-2 AUDIBLE ALARM SHOWN

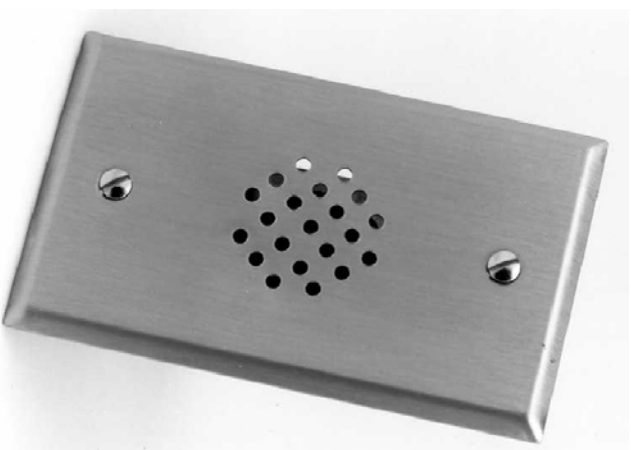

1340-3 AUDIBLE ALARM SHOWN

