


# APS-300 Series 12/24 Series Power Supplies

## APS-300 Series 12/24 Power Supply

9.8VDC-13.7VDC @ 2.8 Amps max / 20.0VDC-27.5VDC @ 1.4 Amps max Power-limited


### Features APS-300 Series:

- Small – Self Contained – Efficient
- Universal AC Input 110-240VAC
- Operates under Brown Out conditions
- 9.8VDC-13.7VDC, 2.8A/20.0VDC-27.5VDC, 1.4A Selectable Continuous Duty
- Input and Output Surge Protection
- Power Limited Output with Thermal Protection
- AC and DC LED's
- Quality Manufactured in the USA with a lifetime Warranty
- Outputs are Power Limited
- Provided in Standard Enclosure 14"x 8.5"x 3.5"
- Precise Battery Regulation for all sealed Lead Acid Battery(s)
- Battery Online, No Drop or Switch Over with AC Power Fail
- Reverse Battery Protection
- Comes with plug in battery cable assembly
- UL and cUL tested to Standards UL 603 Burglar Alarm Power Supplies, UL 294 Access Control Units, and ULC-S318-96 Canadian Standard for Power Supplies for Burglar Alarm Systems
- Relay "C" Contacts Indicates AC Power Status
- LTW Limited Warning of stand by battery(s)
- Battery Disconnect on depleted Battery(s)

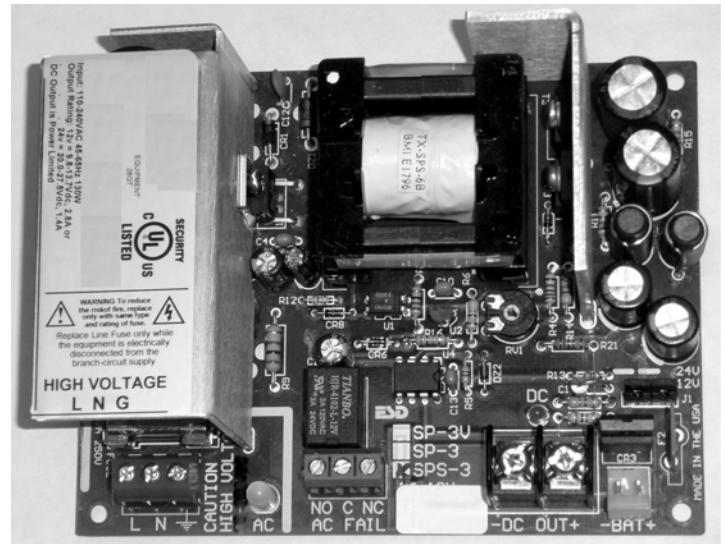

### Ordering examples:

<b>APS-300</b>	Supervised Power Supply/Charger module with Standard Enclosure 14" x 8.5" x 3.5"
<b>APS-3004C</b>	APS-300 with one PD-4C, four output PTC protected distribution board
<b>APS-300FT</b>	APS-300 with one PDFT fire relay module

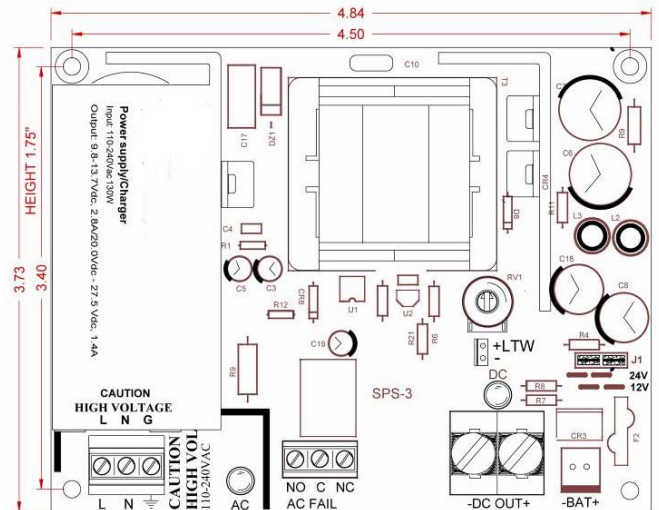

Alarm Controls Corporation  
19 Brandywine Drive  
Deer Park, NY 11729

500-33315\_A Installation specifications subject to change without notice

ASSA ABLOY, the global leader  
in door opening solutions

Phone: (800) 645-5538  
info@alarmcontrols.com  
www.alarmcontrols.com