MODEL TS-11REQUEST TO EXIT STATION



SPECIFICATIONS


- VANDAL RESISTANT 3/4" DIAMETER BRASS NICKEL PLATED PUSHBUTTON
- LABELED "PUSH TO EXIT"
- RED, GREEN LEDS OPERATE ON 12 OR 24 VOLTS, INDEPENDENTLY WIRED
- MOMENTARY ACTION SWITCH
- D.P.D.T. CONTACTS RATED 4A. @ 25 VDC OR 120 VAC
- SWITCH TERMINATED WITH COLOR CODED LEADS
- SWITCH MOUNTED ON 1.75 INCH 302 STAINLESS STEEL WALLPLATE
- SWITCH IS CONSTRUCTED TO MEET IP65 STANDARD FOR DIRECT WATER SPRAY
- 1.5 INCH DEPTH BEHIND PLATE
- CONFORMS TO U.L. STANDARD 294 FOR ACCESS CONTROL
- U.L. LISTED FILE NUMBER SA32686



19 BRANDYWINE DRIVE P.O. BOX 280
DEER PARK, NY 11729
1 631 586-4220 1 800 645-5538
WWW.ALARMCONTROLS.COM EMAIL INFO@ALARMCONTROLS.COM

INSTALLATION INSTRUCTIONS MODELS TS-10, TS-11, TS-12, TS-13



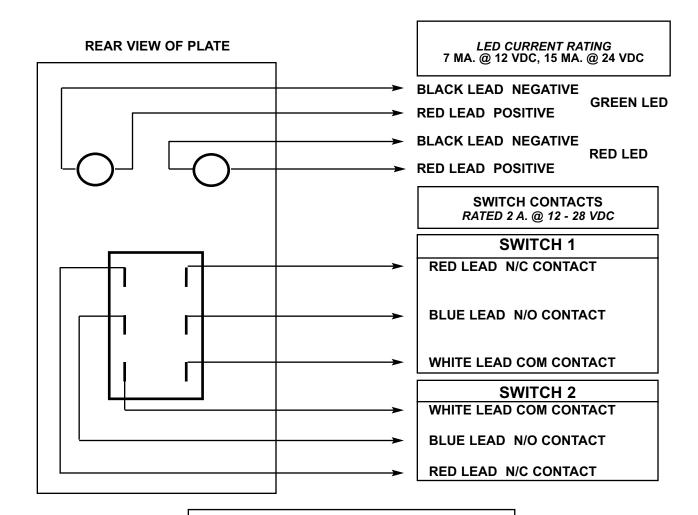

MOUNT WALLPLATE IN A VERTICAL POSITION

MODELS TS-10, TS-11, TS-12 & TS-13 SHOULD BE MOUNTED IN A 2.5 INCH ELECTRICAL BOX

ALARM CONTROLS CORPORATION 19 BRANDYWINE DRIVE P.O. BOX 280 DEER PARK, NY 11729

PH: 1 800 645-5538 1 631 586-4220 FAX; 1 631 586-6500 WWW.ALARMCONTROLS.COM EMAIL: INFO@ALARMCONTROLS.COM