


S6000 Spectra™ Series - S6303FH

HiTower Pro® Frame Actuator Controlled Mortise Exit Device

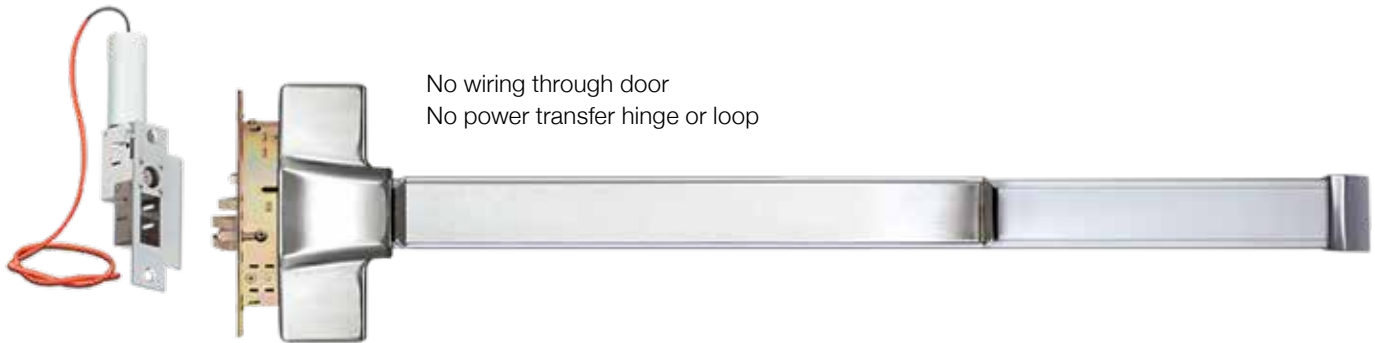

No wiring through door
No power transfer hinge or loop

ELECTRIC FRAME ACTUATOR CONTROLLED EXIT DEVICE

Incorporating the SDC patented HiTower® frame actuator to control the locking and unlocking of the door. Features include failsafe operation and unlocks by access control, power loss or signal from fire command center. Door stays latched even when unlocked. All wiring is maintained in the strike jamb. Complies with national building and fire codes.



FEATURES

- Fire Rated Exit Device
- Failsafe (Unlocks by access control, power loss or signal from fire command center.)
- For Use with Fire Rated Exit & Stairwell Doors
- Door Stays Latched Even when Unlocked
- All Wiring is Maintained in The Strike Jamb
- Complies with National Building and Fire Codes
- No Power Hinge

MODELS

S6303FH Fire Rated Mortise Exit Device with Electric Frame Actuator, Key Retracts Latch

SPECIFICATIONS

Voltage 24VDC, 24VAC or 115VAC



Meets NFPA 80 & 101
for Life Safety





HOW TO ORDER:

1| SPECIFY MODEL

S6303FH Fire Rated Mortise Exit Device with Electric Frame Actuator, Key Retracts Latch

2| SPECIFY ACTUATOR VOLTAGE & FRAME SIZE FAILSAFE ACTUATOR FOR 1-3/4" TO 2" FACE FRAMES

- A** 115VAC 0.2 Amp
- B** 24VAC 0.5 Amp
- C** 24VDC 0.5 Amp

FAILSAFE ACTUATOR FOR 1-1/4" TO 1-1/2" FACE FRAMES

- D** 115VAC 0.2 Amp
- E** 24VAC 0.5 Amp
- F** 24VDC 0.5 Amp

3| SPECIFY HAND

- RR** Right Hand Reverse Bevel, RHRB
- LR** Left Hand Reverse Bevel, LHRB

4| SPECIFY LENGTH

- 36** For 36" Door
- 42** For 42" Door
- 48** For 48" Door

5| SPECIFY HEAD COVER & PUSH PAD FINISH (Push Bar Base Finish Anodized Aluminum)

- U** 630 Dull Stainless Steel

6| SPECIFY OPTIONAL STATUS OUTPUTS

- L** Latch Position Status Output, SPDT, 3 Amp
- S** Latch & Deadlocked Status Output, SPDT, 3 Amp
- SC-10** Socket Connectors with 10 ft. Cable, Power Wiring Only
- SC-10-5** Socket Connectors with 10 ft. Cable for Power and Options L or S

7 SPECIFY TRIM

- EE03** Eclipse x Escutcheon
- E03** Eclipse
- GE03** Galaxy x Escutcheon
- G03** Galaxy
- NE03** Nova x Escutcheon
- N03** Nova



8| SPECIFY TRIM FINISH

- U** 630 Dull Stainless Steel (Standard)

9| SPECIFY KEY CYLINDERS AND OPTIONAL HARDWARE (OPTIONAL)

- CYL-6KDQ** 6 Pin, 1.125" Mortise Cylinder, Keyed different, Dull Chrome
- CYL-6KAQ** 6 Pin, 1.125" Mortise Cylinder, Keyed alike, Dull Chrome



ACCESSORIES

- 602RF** 1 Amp, 24VDC Class 2 Output Power Supply
12" W x 12" H x 3.75" D Box
- 631RF** 1.5 Amp, 24VDC Class 2 Output Power Supply
12" W x 12" H x 3.75" D Box

