


NORTON 5710 Low Energy Power Operator

The global leader in door opening solutions

ASSA ABLOY

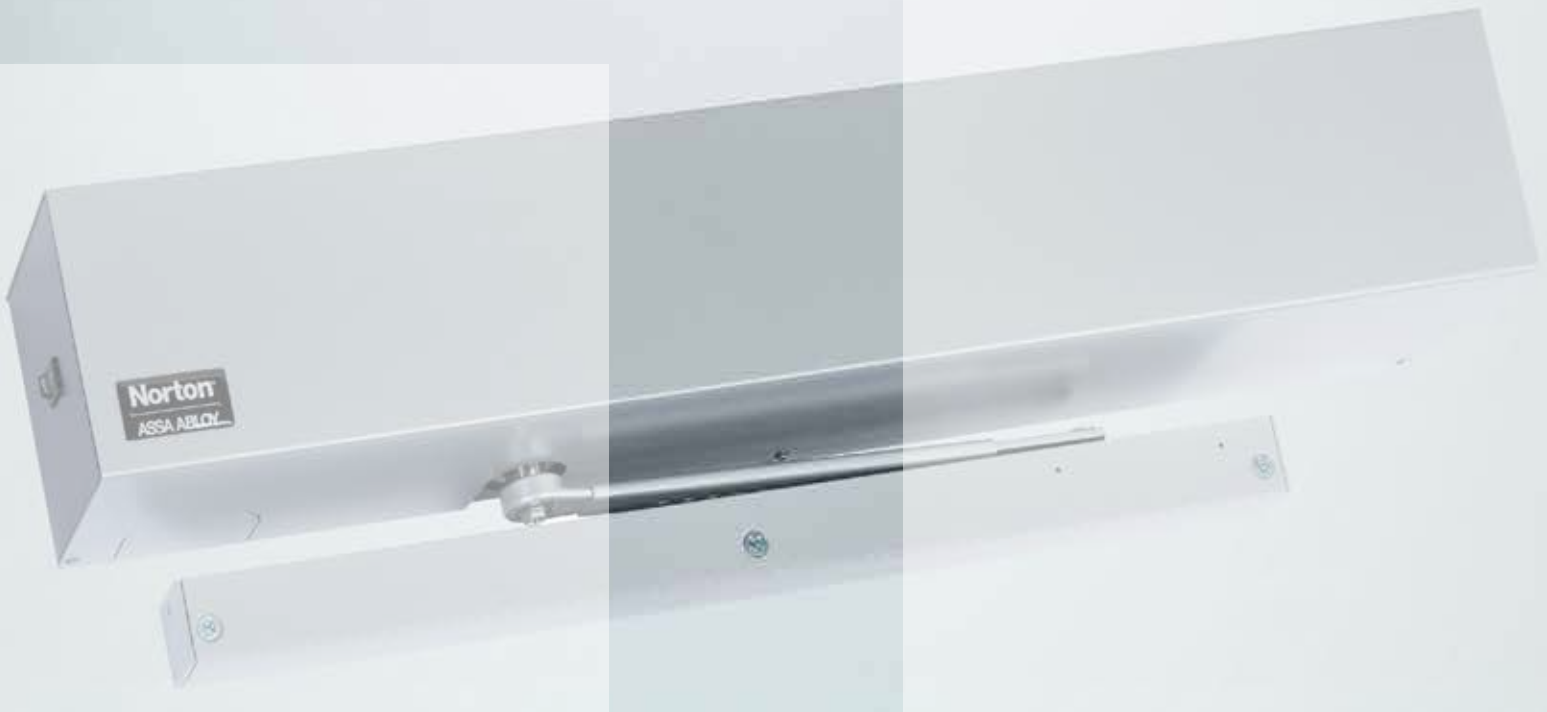

Features

- Pull side mounting unit (5710)
- Operates as mechanical surface closer during closer cycles, when door is opened manually, or if power is turned off
- Easy-to-install and set up
- Non-handed
- Unit activation options include wall switches, motion sensors & radio frequency device
- Obstruction detection (open)
- External On/Off switch
- Adjustable hydraulic backcheck
- Adjustable hold open: 0 to 30 seconds
- 2-year warranty

679 Signage Kit (supplied standard)



(1 per switch)



(1 per switch)



(2 per operator)

700 Wave to Open Switch



539 Radio Frequency Receiver



433 MHz

Activating Door Switches



506, 533



505, 531

Technical Specifications

Materials:

- Cover: Aluminum
- Base: Steel

System:

- Pull Side -bulletLow Energy Operator: OP-5710
- Power Input: 120VAC, 60Hz
- Current Draw: .6A
- Relay Output: SPDT - N.O./N.C. (jumper)
- Dimensions:
 - Body with Cover: 29" x 5¹/₄"
 - Body Projection: 4³/₈"

Approvals and Listings:

- ANSI/BHMA A156.19 certified
- Meets ANSI/BHMA A156.4 requirements
- UL / cUL listed for use on fire rated doors
- UL10C listed for positive pressure fire test
- Complies with the Americans with Disabilities Act (ADA)
- Product is manufactured in an ISO 9001 facility

Finish Options:

- Aluminum Painted (US28/689)
- Dark Bronze Painted (US20/690)

ASSA ABLOY Glass Solutions
300 Main Street
Rockwood, PA 15557
PH: (855) 594-6989
www.assaabloyglass.us

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience