

Panic Devices

The global leader in
door opening solutions

ASSA ABLOY



Features

- Top latching panic device with easy align security latch
- Engraved latch lines ensure proper engagement with strike
- Post mount design suites with Rockwood architectural pulls
- Keyed and non-keyed options
- Six standard exterior pull options
- Dogging feature
- Engraved push area and boundary grooves allow for enhanced visibility and tactility



Technical Specifications

Materials:

- Stainless Steel

System:

- Panic Device (PDU-8000)
- Functions
 - Keyed
 - Passage - dogging standard (specify no dogging if not required)
- Dimensions
 - Grip Diameter: 1¹/₄"
 - Vertical (Crash Bar to Top of Tube): 28¹/₂" min; 73" max
 - Horizontal: 15³/₄" min; 48" max
 - Projection: 2⁵/₈" Panic Side
3¹/₄" Mating Pull Side

Door Specifications:

- For glass doors 1/2" to 3/4" thick standard
 - Non-standard thickness please specify

Application Types:

- Glass Mounted
- Rail Mounted

Handing:

- Right Hand Reverse (Swing 3)
- Left Hand Reverse (Swing 4)

Strikes:

- Single Manual
- Double Manual
- Single Electric (Folger Adam 310-1 Series)
 - Fail Safe/Fail Secure
- Double Electric (Folger Adam 310-1 Series)
 - Fail Safe/Fail Secure

Cylinder Options:

Description	Code
Mortise Cylinder	01
7-pin SFIC Housing w/ Construction Core	02
Special Order (Keyed alike)	03
Customer Supplied Cylinder	04
Dummy Cylinder Housing	05
Non-Keyed Function (Blank Escutcheon Plate provided)	06

Patents, Approvals and Listings:

- ANSI/BHMA A156.3-2008, Grade 1 Certified (32 and 32D finishes only)
- UL305, ULC-S132-07
- Meets California Building Code (2013) Sec. 11B-309.4
- ADA Compliant
- Patents Pending

Finish Options

- Satin Stainless Steel (US32D/630)
- Bright Stainless Steel (US32/629)
- Bright Stainless Steel with MicroShield® Antimicrobial Coating (US32MS)
- Split Finish - Satin Stainless Steel Device (US32D/630) and Bright Stainless Steel Push Area (US32/629)
- Extra Dark Bronze Equivalent (314E)
- Stock Powder Coats (Specify color)

Engraved Push Area Finish Options

Split finish – 32D device; 32 push area



White Paint




Black Paint (standard)




PDU-8000 Exterior Pull Options


No Mating Pull




Full Height L-Shaped Pull (-1)

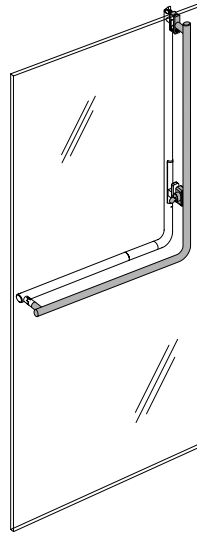


Half Height L-Shaped Pull (-2)

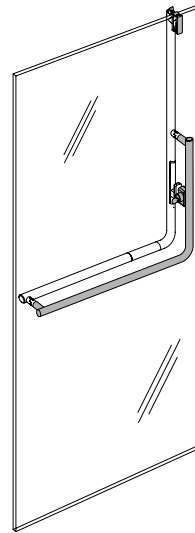


Full Height Straight Pull (-3)

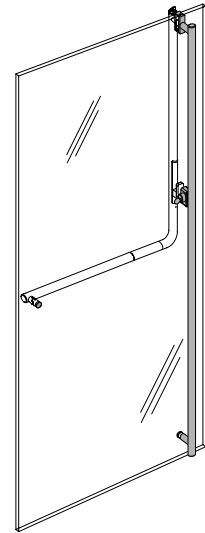


Half Height Straight Pull (-4)

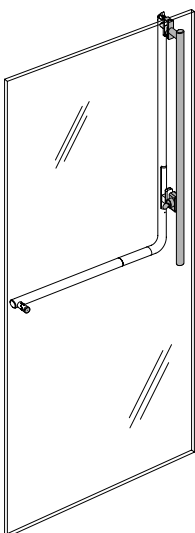

Short Centered Straight Pull (-5)

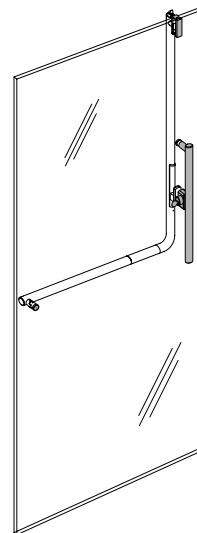

Horizontal Straight Pull(-6)

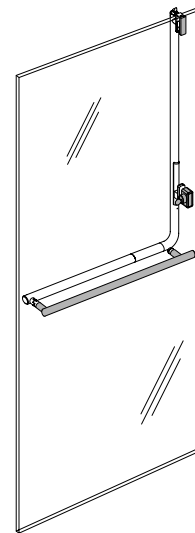

Sold Through



Authorized Channel Partner
ASSA ABLOY



ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience

ASSA ABLOY

ASSA ABLOY Glass Solutions
300 Main Street
Rockwood, PA 15557
CustomerService.GlassSolutions@assaabloy.com
PH: 855-594-6989
www.assaabloyglass.us

Copyright © 2017, ASSA ABLOY Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Inc. is prohibited.

04/17 3305D