

SECURITRON® R100 Wireless Reader and Aperio® Hub


The global leader in door opening solutions

ASSA ABLOY



Features

- Adheres to glass surface without any connecting wires
- Shortened wire pull from panel to hub provides cost benefit in installation
- Fully-encrypted AES 128 wireless communication
- Online transaction audit trail capability
- Low-battery signaling and reporting
- Green status LED indicator
- Protected by SecuriCare® three-year, no-fault warranty

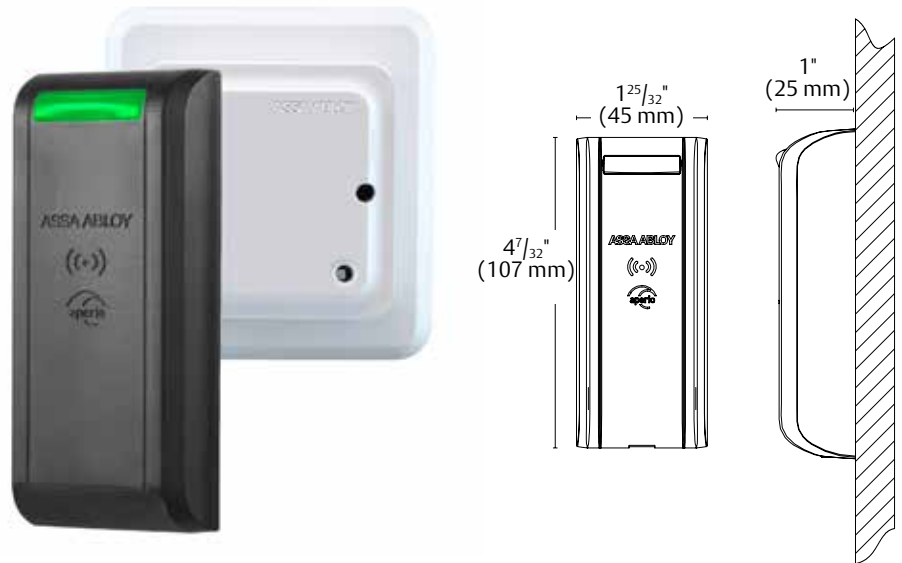

Technical Specifications

Materials:

- Reader and hub: plastic enclosure

System:

- Model Options:
 - Low frequency model supports PROX and EM PROX (RD-R100-1H-PA)
 - High frequency model supports iCLASS®, iCLASS SEOST™, iCLASS SE, ISO14443B UID, Mifare, Mifare Plus, Desfire SE, Desfire EV1, NFC (RD-R100-1H-SE)
- Battery: 1 x 3V CR2 Lithium battery
- Operating Temperature: -40°F to +122°F (-40°C to + 50°C); indoor or outdoor use
- Dimensions: 4 1/4" L x 1 13/16" W x 1" H

Accessories:


- Aluminum dress cover (RD-R100-DCA)

Patents, Approvals and Listings:

- FCC Part 15 and IC Compliant

Finish Options:

- Reader: Black
- Hub: White

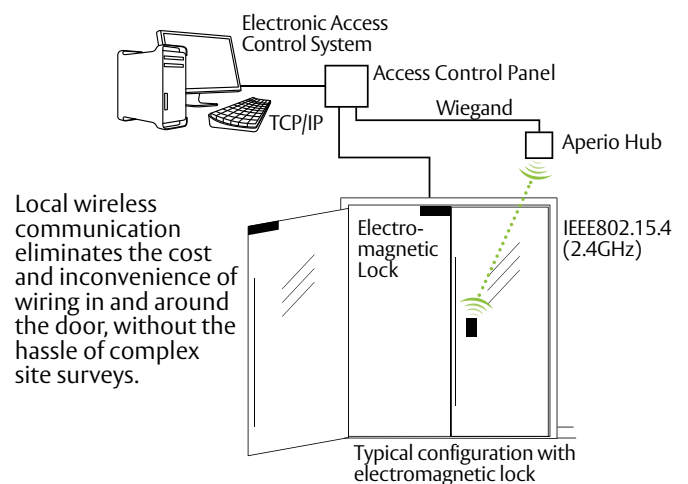

ASSA ABLOY Glass Solutions
300 Main Street
Rockwood, PA 15557
PH: (855) 594-6989
www.assaabloyglass.us

ASSA ABLOY is the global leader in door opening solutions, dedicated to satisfying end-user needs for security, safety and convenience