
3400 SERIES HOLDER/STOP


MEDIUM DUTY OVERHEAD HOLDERS AND STOPS

**WHEN ORDERING,
please list:**

Model number

Door opening and thickness

Finish

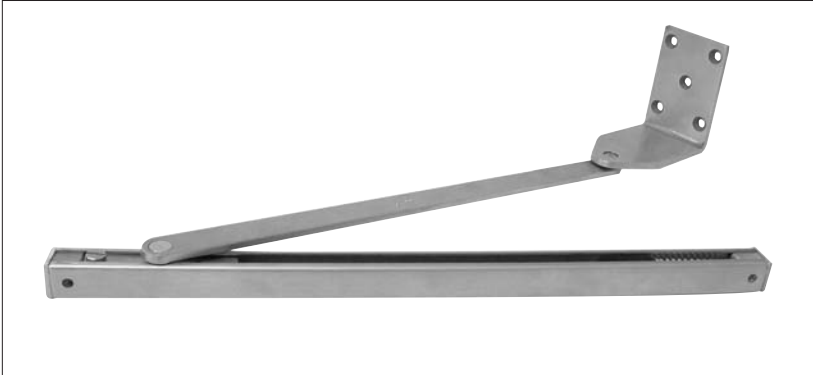

SPECIFICATIONS:

3410 Series hold-open mechanism with sliding block will release or engage door by push or pull. Hold open can be made inactive for stop only function. Jamb portion to be die cast.

STANDARD FEATURES

- Surface mounted
- For doors that don't extend to the frame header.
- Ideal for dressing room doors, washroom stall doors with frames
- Non-Handed
- 90 degree standard door opening. Contact factory for other degrees of opening.
- Standard unit with hold open.
- Hold open can be made inactive for stop only function
- Minimum door size 24"
- For doors mounted on butt type hinges
- US32D standard, other architectural finishes available

www.abhmfg.com
E-mail: abhinfo@abhmfg.com
Architectural Builders Hardware Mfg., Inc.
1222 Ardmore Ave., Itasca, IL 60143
630.875.9900; FAX 800.9FAXABH (932.9224)


© 2005 ABH Mfg., Inc.
Printed in USA 02/05

ABH[®]

DISTRIBUTED BY
AHS ACCESS HARDWARE SUPPLY
accesshardware.com


3400 SERIES DOOR HOLDER/STOP NON-HANDED SINGLE ACTING 90° ONLY

NOTE:
FOR DOORS WITH MINIMUM OF 24" CLEARANCE FROM FLOOR TO BOTTOM OF DOOR, MOUNT HOLDER AT BOTTOM OF DOOR.
FOR DOORS OVER 7' WITH NO FRAME HEADER, MOUNT HOLDER AT TOP OF DOOR.

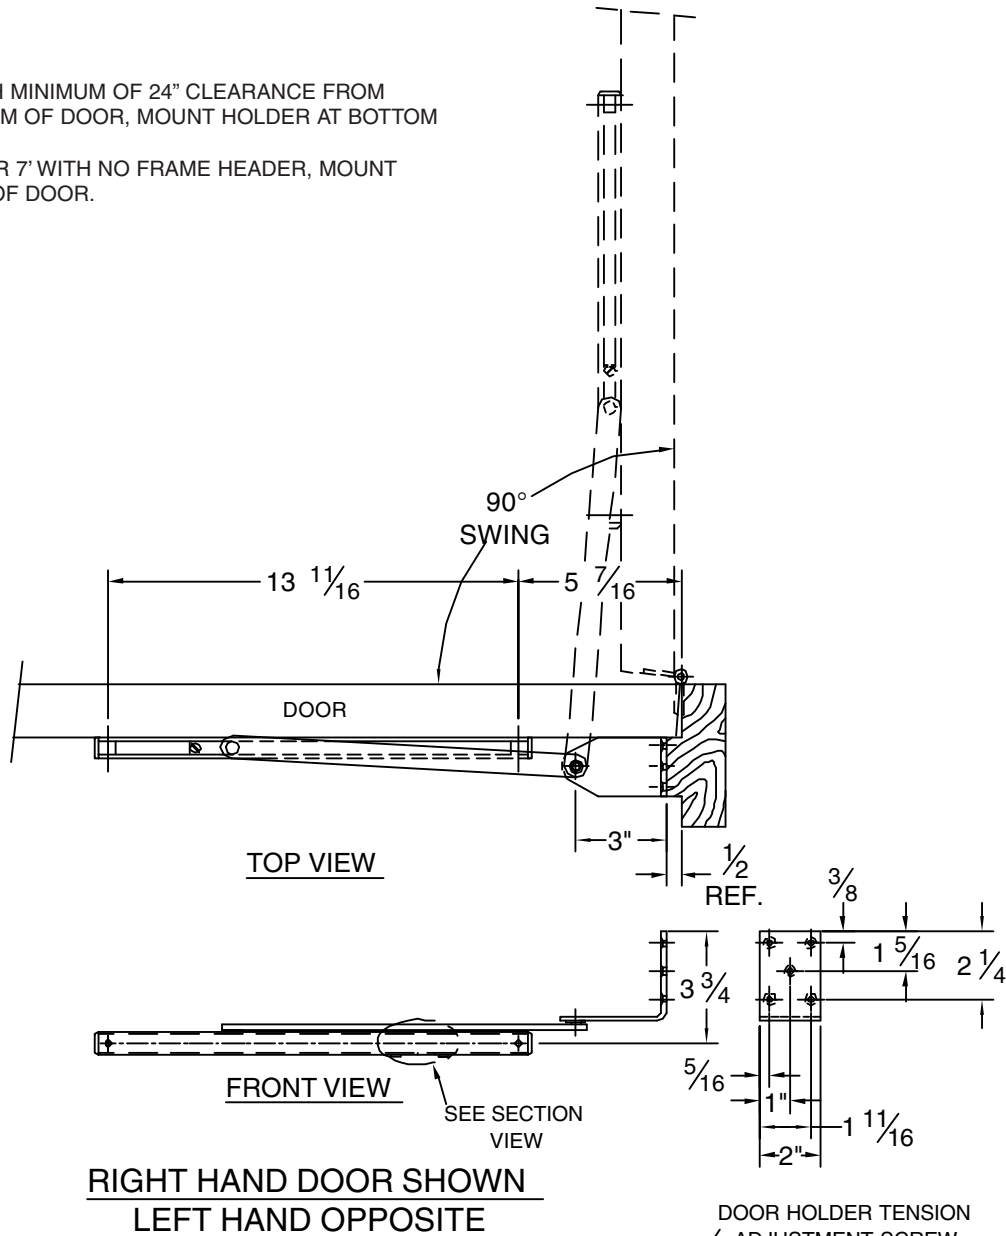

SCREW DETAIL

	QTY.	WOOD	METAL
JAMB	5	#10 X 1-1/2 F.H.W.S.	#10-32 X 1/2 F.H.M.S.
DOOR	2	#10-32 X 1-1/2 R.H.M.S. 5/16" DIA. SEX BOLT	#10-32 X 1-1/2 R.H.M.S. 5/16" DIA. SEX BOLT



www.abhmfg.com
E-mail: abhinfo@abhmfg.com
Architectural Builders Hardware Mfg., Inc.
 1222 Ardmore Ave., Itasca, IL 60143
630.875.9900; FAX 800.9FAXABH (932.9224)

© 2005 ABH Mfg., Inc.
Printed in USA 02/05

