

# Hospital Push/Pull Latches




Innovation, Quality,  
Customer Service...

## 6000 Series Cylindrical Latches

### Standard Features

- Cylindrical latch application - passage function
- 1-3/4" standard door thickness (specify if different)
- Meets ADA requirements
- Trim is mounted using four thru-bolts for maximum stability
- One continuous spring provides a smoother operation and an extended life for the unit
- Non-handed for installation and stocking ease
- Trim can be mounted vertical or horizontal (with handles pointing toward hinge edge of door)
- Handles can be mounted up or down by simply rotating trim 180°
- UL Listed in U.S.A and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"

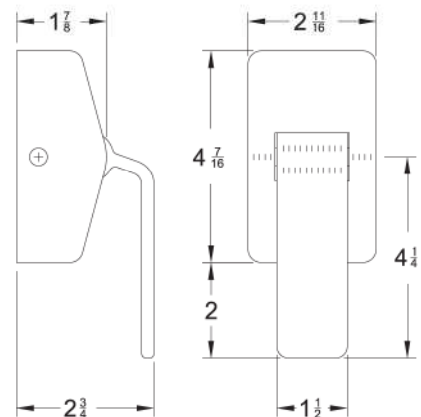

### How to Order:

Example: 60 2 A - US32D - AM

**Model:** \_\_\_\_\_

- 60 = 6000 Series

**Latch Backset:** \_\_\_\_\_

- 2 = 2-3/4"    • 5 = 5"
- 3 = 3-3/4"    • 7 = 7"

**Strike:** \_\_\_\_\_

- T = 2-3/8" T-Strike
- A = 4-7/8" ASA Strike

**Finish:** \_\_\_\_\_

- US32D    • US32    • US10B    • US3
- US26D    • US26    • US10    • US4

**Options, if Available:** \_\_\_\_\_

- AM • L • PL • PS • H    • EX
- X    • J    • RC • SEC • THICK • P

(See pages C-3 to C-5 for details)



Architectural Builders Hardware Manufacturing, Inc.  
1222 Ardmore Avenue, Itasca, IL 60143  
Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224  
Web: www.abhmfg.com • Email: abhinfo@abhmfg.com

2014 ABH Mfg., Inc.

C-7

DISTRIBUTED BY



ACCESS HARDWARE SUPPLY  
accesshardware.com