

Hospital Push/Pull Latches



6800 Series – Low Profile Cylindrical Latches


Innovation, Quality,
Customer Service...

Standard Features


- Cylindrical latch application – passage function
- 1-3/4" standard door thickness (specify if different)
- Meets ADA requirements
- Trim is mounted using four thru-bolts for maximum stability
- Handing of unit is field-reversible by easily reversing the cam holder assembly on the backside of the unit
- Linear acting cam which provides for a smoother operating unit
- One continuous spring provides a smoother operation and an extended life for the unit
- UL Listed in U.S.A and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"



Optional Round Cover &
Custom Engraving Shown

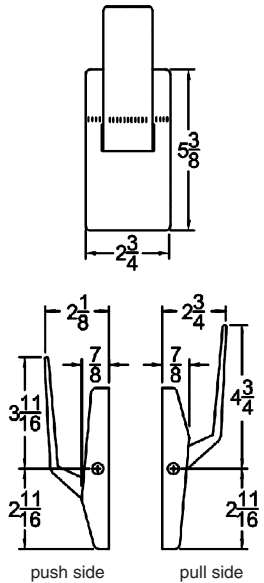

Models

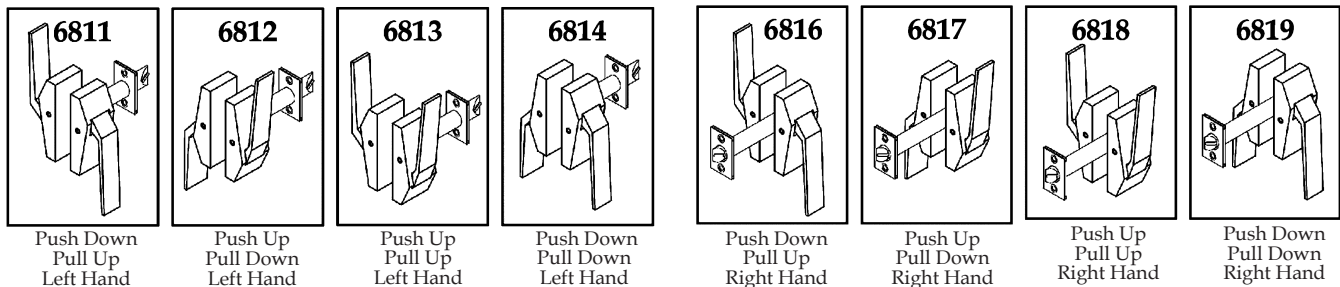

How to Order:

Example: 6811 - 2 A - US32D - AM

Model:

- 6811 • 6812 • 6813 • 6814
- 6816 • 6817 • 6818 • 6819

Latch Backset:

- 2 = 2-3/4" • 5 = 5"
- 3 = 3-3/4" • 7 = 7"

Strike:

- T = 2-3/4" T-Strike
- A = 4-7/8" ASA Strike

Finish:

- US32D • US32 • US10B • US3
- US26D • US26 • US10 • US4

Options, if Needed:

- H • AM • L • PL • PS • EX • X
- RC • SEC • THICK • P • Q

(See page C-3 to C-5 for details)



Architectural Builders Hardware Manufacturing, Inc.
1222 Ardmore Avenue, Itasca, IL 60143
Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224
Web: www.abhmfg.com • Email: abhinfo@abhmfg.com

DISTRIBUTED BY



2015 ABH Mfg., Inc. C-13