



# Configuring the ALX Series lock

Using kits to build a lock to suit your needs anytime

## 1 Start with chassis

Available in all finishes: 605, 606, 612, 613, 619, 622, 625, 626, or 643E (Rhodes rose and ANSI strike only)

## 2 Choose function

### Backset options:

2 3/8" or 2 3/4"

### Finish options:

All

## 3 Select levers

Inside

Outside

### Finish options: All

### Design options:

#### Function or core

Closed, Button, KIL

FSIC, SFIC

L-SAR, L-CO6, J-SAR, J-CO6

J-CO7

ATH	BRK	BRW	LAT	LON	RHO	SAT	SPA	TLR
Athens	Boardwalk	Broadway	Latitude	Longitude	Rhodes	Saturn	Sparta	Tubular
■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	■	■
				■	■	■	■	■

## 4 Add cylinder

### Finish options:

606 - for 605, 606, 612


622 - for 622,

626 - for 619, 625, 626


643e - for 613, 626

Note: Cylinders are sold separately. Specify finish when ordering.


### 10 Passage




### CL Closed

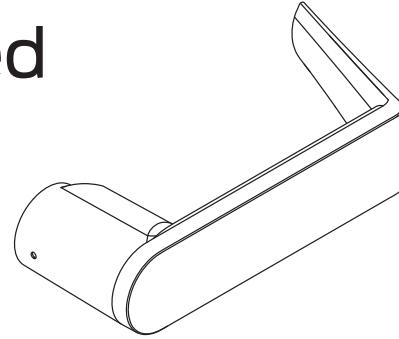

### CL Closed

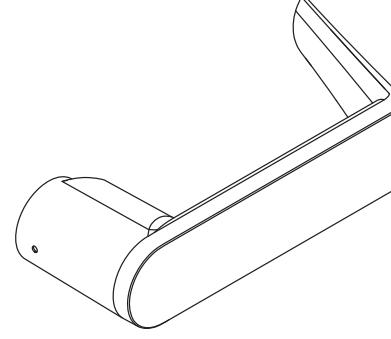


### 40 Bath/bedroom privacy

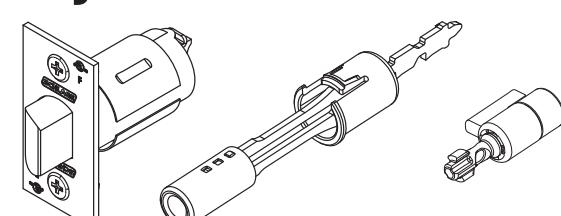


### BT Button

Note: button hole is slightly smaller than a KIL hole.

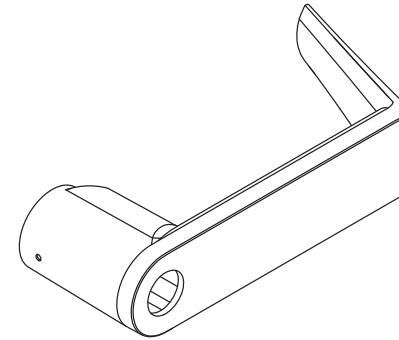


### KIL Schlage Key-in-lever


Note: Also used for coin turn and hospital emergency turn.

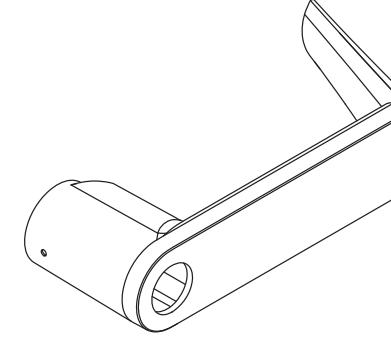

### 44 Hospital privacy

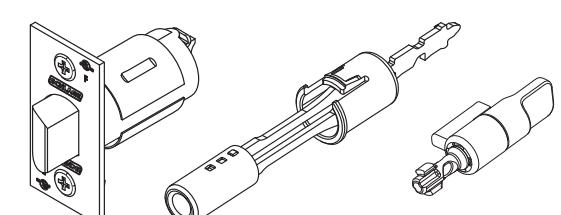


### BT Button

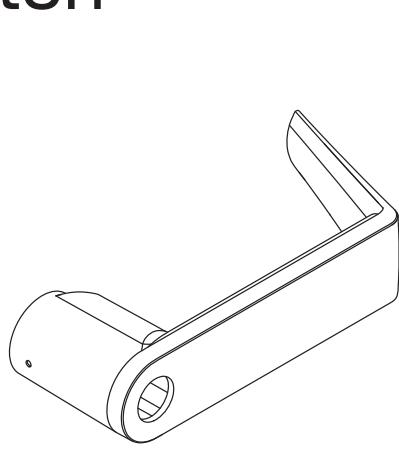


### KIL Schlage


L-SAR fits Sargent 10L and 11L  
L-CO6 fits Corbin 2000

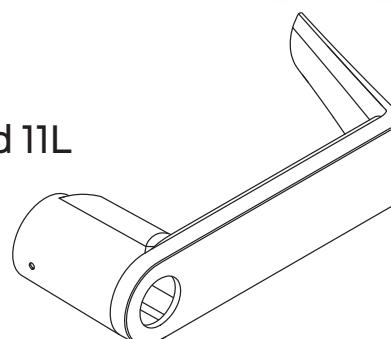


### KIL Schlage



### 50 Entrance/office

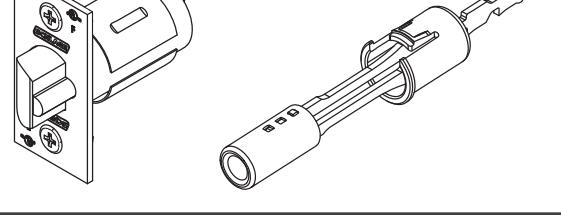


### BT Button

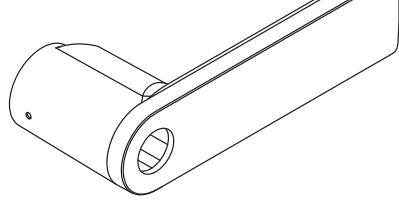

### FSIC Schlage


J-SAR fits Sargent 6300  
J-CO6 fits Corbin 8000  
J-CO7 fits Corbin 8000-7

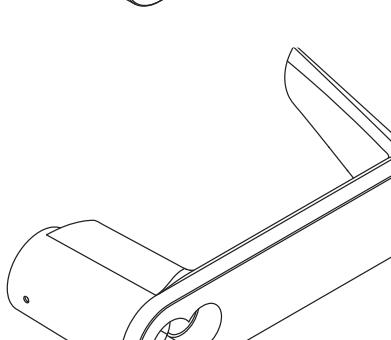


### FSIC Schlage




### 53 Entrance

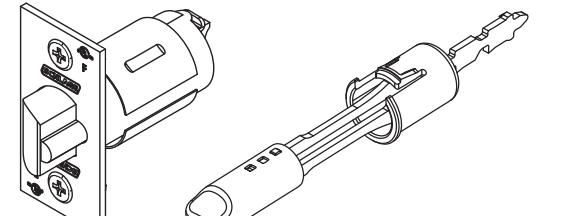


### CL Closed

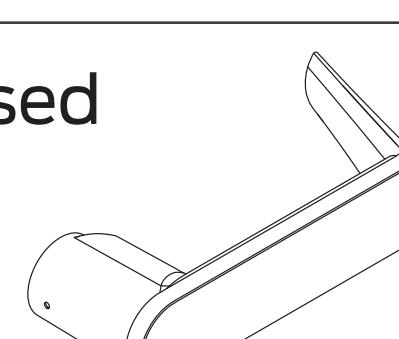


### SFIC

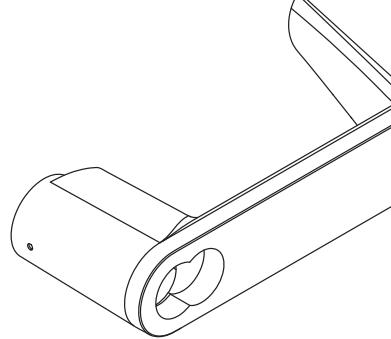

### 80 Storeroom

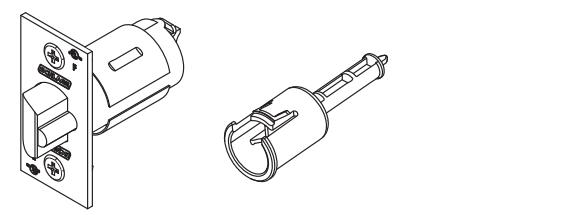

### CL Closed

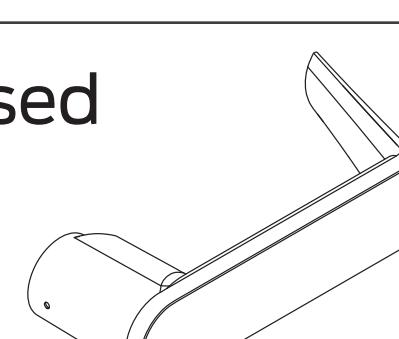


### Schlage KIL

FSIC




### Schlage FSIC

SFIC

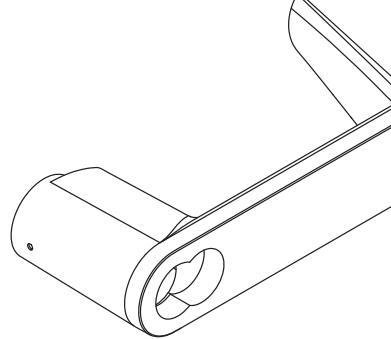


### Schlage KIL

FSIC

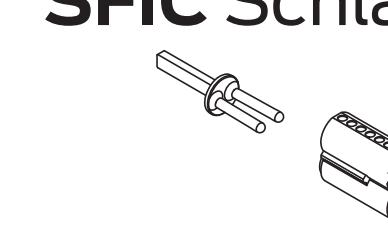


### Schlage FSIC

SFIC




See chart below for ordering proper cylinder and tailpiece combinations.

### 70 Classroom

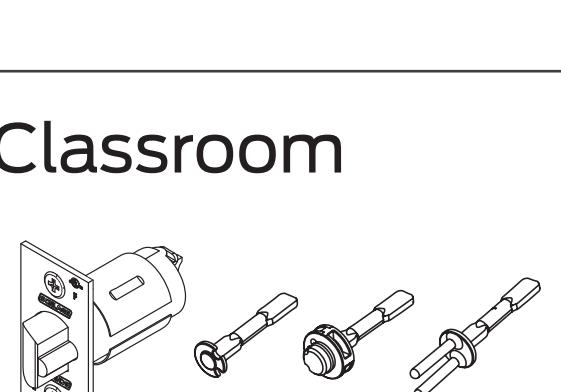

### CL Closed

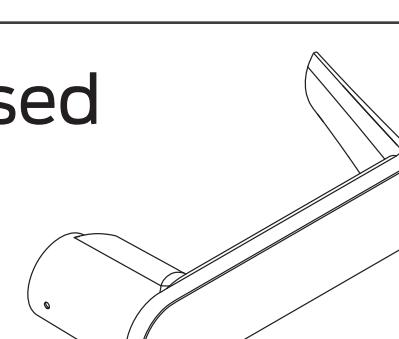

### Schlage KIL


### FSIC

### SFIC



FSIC


SFIC

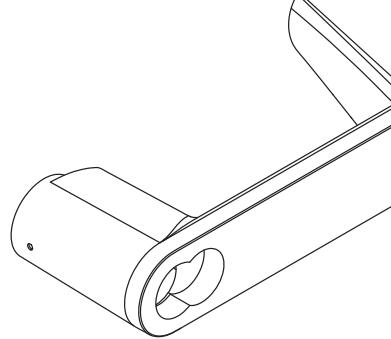

### Schlage KIL

FSIC

SFIC

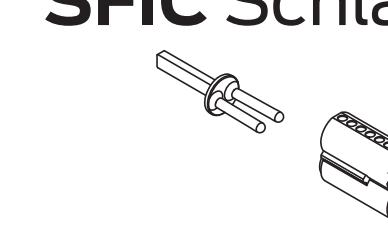

Note: All tailpiece options are provided in the function kit for 70 Classroom function.

#### Conventional KIL

Cylinder mechanism	Cylinder and tailpiece	Tailpiece only	Functions	Pins
Standard pin and tumbler	21-020	A700-031	50, 53, 80	5, 6
	23-195	47270197	70	
SL cylinder (restricted Everest 29R and Everest B only)	91-018	N523-022	50, 53, 80	7
	91-118	47270197	70	
Primus	20-765	N523-022	50, 53, 80	6
	20-685	47270197	70	
Primus UL 437 (UL listed high security)	20-565	A700-031	50, 53, 80	6
	20-566	47270197	70	
SL Primus XP (restricted Everest 29R and Everest B only)	91-718-XP	N523-022	50, 53, 80	7
	91-118-XP	47270197	70	
Primus XP	20-765-XP	N523-022	50, 53, 80	6
	20-685-XP	47270197	70	
Primus XP UL 437 (UL listed high security)	20-565-XP	N523-022	50, 53, 80	6
	20-566-XP	47270197	70	

#### Interchangeable cores

Cylinder mechanism	Cylinder only	Tailpiece only	Functions	Pins
FSIC pin and tumbler	23-030	N523-127	50, 53, 80	6
		47269168	70	
FSIC SL cylinder (restricted Everest 29R and Everest B only)	91-161	N523-127	50, 53, 80	7
		47269168	70	
FSIC Primus	20-740	N523-127	50, 53, 80	6
		47269168	70	
FSIC SL Primus XP (restricted Everest 29R and Everest B only)	91-861	N523-127	50, 53, 80	7
		47269168	70	
FSIC refundable construction core – color coded	23-030-ICX	N523-127	50, 53, 80	6
		47269168	70	
SFIC combined Everest 29 R family keyway	80-037	N523-091	50, 53, 80	7
		47269620	70	
SFIC refundable construction core – color coded	80-035	N523-091	50, 53, 80	7
		47269620	70	

#### Less cylinder options

Cylinder type	Made to fit	Tailpiece	Functions
L-SAR	Sargent 10L and 11L 6-pin KIL	09-060	50, 53, 80
L-CO6	Corbin 2000, 6-pin KIL	10-140	50, 53, 80
J-SAR	Sargent 6300, 6-pin FSIC	09-063	50, 53, 80
J-CO6	Corbin 8000, 6-pin FSIC	09-062	50, 53, 80
J-CO7	Corbin 8000-7, 7-pin FSIC	10-141	50, 53, 80

DISTRIBUTED BY  
**AHS** ACCESS HARDWARE SUPPLY [accesshardware.com](http://accesshardware.com)

© 2019 Allegion 013368, Rev. 12/19  
[www.allegion.com/us](http://www.allegion.com/us)