

## Rim Type

### Performance Features

- Consistent styling allows for harmonization with other STANLEY Commercial Hardware products.
- Thru-bolt trim design for increased security and durability.
- Wide variety of trim options to fit any job.

### Certifications



- ANSI/BHMA A156.3 – Grade 1
- UL/cUL listed (3 hours) for “A” label doors when used with HMS strike
- ANSI A117.1 Section 404.2.6 Accessibility Code (ADA Compliant)
- California Administrative Code Title 24 (for lever trims)

### Product Specifications

- Handing – All QED200 Series Exit Devices are non-handed.
- Door thickness – 1 3/4" standard (44.5mm).
- Latch bolt – Stainless steel 3/4" standard (19mm).
- Fasteners – Wood screws, machine screws and sex bolts standard.
- Head cover & end cap – Zinc die-cast.
- Trims – Sierra, Summit and Slate styles available.  
Escutcheon offering – Dummy, passage, keyed, night latch.  
Pull plate offering – Dummy, night latch, flat plate.
- Stile width – 2" minimum (50.8 mm) for ALS strike; 3 1/2" minimum (88.9 mm) for HMS strike option.
- Dogging – Hex key dogging and cylinder dogging available.
- 36" field sizeable to 26" door.  
48" field sizeable to 36" door.

### Keying

- Offered with the following keyway options: BEST 'F' SFIC, KW-Kwikset, WE-Weiser, SC-Schlage, GA-Yale, LA-Sargent and LC-Less Cylinder.  
Consult factory for details on Mortise and Rim Cylinder requirements.

### Warranty

- Lifetime Mechanical and 3-year finish

NOTE:

\*QED213 available with HMS strike only.



QED211



Sierra (E)

Summit (M)

Slate (A)

Pull Plate (L)

### Functions

Series	Description
QED211	Rim Hex Dog
QED212	Rim Cylinder Dog
QED213	Rim Fire-Rated*

### Exit Trim Offerings

ANSI	Series	Description
02	QET220	Dummy Lever Escutcheon
02	QET225	Dummy Pull Plate
14	QET230	Passage Lever Escutcheon
08	QET260	Keyed Lever Escutcheon
03	QET270	Night Latch Lever Escutcheon
03	QET275	Night Latch Pull
09	QET280	Night Latch Lever Escutcheon
01	QET290	Flat Plate

### Finishes

BHMA	Description
605	Bright Brass
313AN	Anodized DuraNodic Bronze
626	Satin Chrome



## Surface Vertical Rod (SVR) Type

### Performance Features

- Consistent styling allows for harmonization with other STANLEY Commercial Hardware products.
- Thru-bolt trim design for increased security and durability.
- Wide variety of trim options to fit any job.

### Certifications



- ANSI/BHMA A156.3 – Grade 1
- UL/cUL listed (3 hours) for “A” label for 8' x 8' opening
- ANSI A117.1 Section 404.2.6 Accessibility Code (ADA Compliant)
- California Administrative Code Title 24 (for lever trims)

### Product Specifications

- Handing – All QED200 Series Exit Devices are non-handed.
- Door thickness – 1 3/4" standard (44.5mm).
- Door height – 7' standard with 84" rods; 8' with 96" rods.
- Latch bolt – Stainless steel 1/2" throw (12.7mm).
- Fasteners – Wood screws, machine screws and sex bolts standard.
- Head cover & end cap – Zinc die-cast.
- Trims – Sierra, Summit and Slate styles available.  
Escutcheon offering – Dummy, passage, keyed, night latch.  
Pull plate offering – Dummy, night latch, flat plate.
- Stile width – 2" minimum (50.8 mm).
- Dogging – Hex key dogging and cylinder dogging available.
- 36" field sizeable to 26" door.  
48" field sizeable to 36" door.
- QED219 includes bottom fire bolt.

### Keying

- Offered with the following keyway options: BEST 'F' SFIC, KW-Kwikset, WE-Weiser, SC-Schlage, GA-Yale, LA-Sargent and LC-Less Cylinder.  
Consult factory for other cylinder options and for details on Mortise and Rim Cylinder requirements.

### Warranty

- Lifetime Mechanical and 3-year finish



### Functions

Series	Description
QED214	SVR Hex Dog
QED215	SVR Cylinder Dog
QED216	SVR Fire-Rated
QED217	SVR Less Bottom Rod – Hex Dog
QED218	SVR Less Bottom Rod – Cylinder Dog
QED219	SVR Less Bottom Rod – Fire-Rated

### Exit Trim Offerings

ANSI	Series	Description
02	QET220	Dummy Lever Escutcheon
02	QET225	Dummy Pull Plate
14	QET230	Passage Lever Escutcheon
08	QET260	Keyed Lever Escutcheon
09	QET280	Night Latch Escutcheon
01	QET290	Flat Plate

### Finishes

BHMA	Description
605	Bright Brass
313AN	Anodized Duranodic Bronze
626	Satin Chrome

EXIT DEVICES

## Concealed Vertical Rod (CVR) Type

### Performance Features

- Consistent styling allows for harmonization with other STANLEY Commercial Hardware products.
- Thru-bolt trim design for increased security and durability.
- Wide variety of trim options to fit any job.

### Certifications



- ANSI/BHMA A156.3 – Grade 1
- UL/cUL listed (3 hours) for "A" label for 8' x 8' opening
- ANSI A117.1 Section 404.2.6 Accessibility Code (ADA Compliant)
- California Administrative Code Title 24 (for lever trims)

### Product Specifications


- Handing – All QED200 Series Exit Devices are non-handed.
- Door thickness – 1 3/4" standard (44.5mm).
- Door height – 7' standard with 84" rods; 8' with 96" rods.
- Latch bolt – Stainless steel 1/2" throw (12.7mm).
- Fasteners – Wood screws, machine screws and sex bolts standard.
- Head cover & end cap – Zinc die-cast.
- Trims – Sierra, Summit and Slate styles available.  
Escutcheon offering – Dummy, passage, keyed, night latch.  
Pull plate offering – Dummy, night latch, flat plate.
- Stile width – 3 1/2" minimum (50.8 mm).
- Dogging – Hex key dogging and cylinder dogging available.
- 36" field sizeable to 26" door.  
48" field sizeable to 36" door.
- QED229 includes bottom fire bolt.

### Keying

- Offered with the following keyway options: BEST 'F' SFIC, KW-Kwikset, WE-Weiser, SC-Schlage, GA-Yale, LA-Sargent and LC-Less Cylinder.  
Consult factory for details on Mortise and Rim Cylinder requirements.

### Warranty

- Lifetime Mechanical and 3-year finish

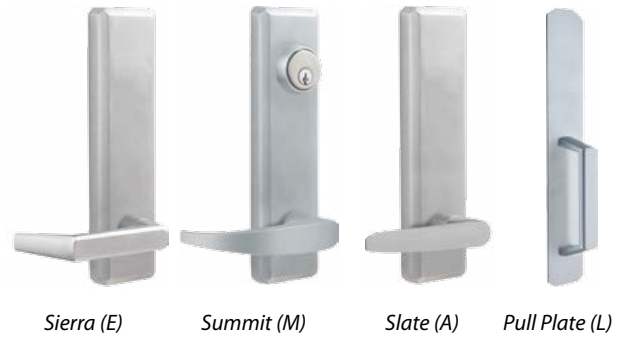

Sierra (E)

Summit (M)

Slate (A)

Pull Plate (L)



QED224

### Functions


Series	Description
QED224	CVR Hex Dog
QED225	CVR Cylinder Dog
QED226	CVR Fire-Rated
QED227	CVR Less Bottom Rod – Hex Dog
QED228	CVR Less Bottom Rod – Cylinder Dog
QED229	CVR Less Bottom Rod – Fire-Rated

### Exit Trim Offerings

ANSI	Series	Description
02	QET220	Dummy Lever Escutcheon
02	QET225	Dummy Pull Plate
14	QET230	Passage Lever Escutcheon
08	QET260	Keyed Lever Escutcheon
09	QET280	Night Latch Escutcheon
01	QET290	Flat Plate

### Finishes

BHMA	Description
605	Bright Brass
313AN	Anodized Duranodic Bronze
626	Satin Chrome

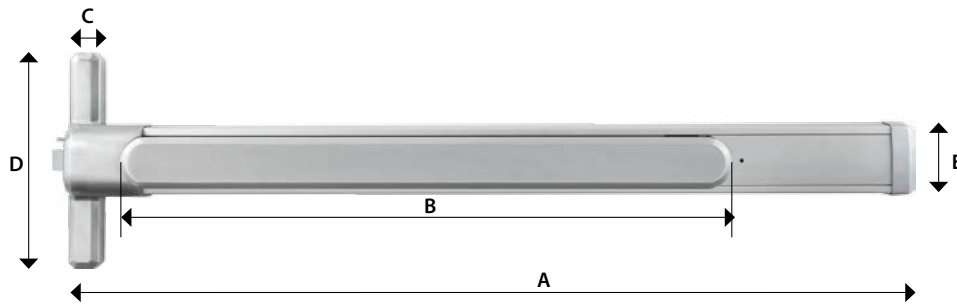

QED200 Series	36" Device			48" Device			Head Cover Length	Head Cover Width	End Cap Width
	Minimum Door Width	Device Length	Pushpad Length	Minimum Door Width	Device Length	Pushpad Length			
Measurement		<b>A</b>	<b>B</b>		<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>
Panic-Rated (with Dogging)	30"	34 11/16"	20"	36"	46 3/4"	24 1/2"	1.5"	8 5/16"	2.5"
	762 mm	881 mm	508 mm	914.4 mm	1187.5 mm	622.3 mm	38.1 mm	211.1 mm	63.5 mm
Fire-Rated or Panic (with Dogging Removed)	26"	34 11/16"	20"	33"	46 3/4"	24 1/2"	1.5"	8 5/16"	2.5"
	660.4 mm	881 mm	508 mm	838.2 mm	1187.5 mm	622.3 mm	38.1 mm	211.1 mm	63.5 mm

Model/Series	Functions	Style	Case Qty
QED211	Rim Hex Dog	—	1
QED212	Rim Cylinder Dog	—	1
QED213	Rim Fire-Rated*	—	1
QED214	SVR Hex Dog	7FT	1
QED215	SVR Cylinder Dog	7FT	1
QED216	SVR Fire-Rated	7FT	1
QED217	SVR Less Bottom Rod (LBR) Hex Dog	7FT	1
QED218	SVR LBR Cylinder Dog	7FT	1
QED219	SVR LBR Fire-Rated	7FT	1
QED224	CVR Hex Dog	7FT	1
QED225	CVR Cylinder Dog	7FT	1
QED226	CVR Fire-Rated	7FT	1
QED227	CVR LBR Hex Dog	7FT	1
QED228	CVR LBR Cylinder Dog	7FT	1
QED229	CVR LBR Fire-Rated	7FT	1

NOTES:  
All Less Bottom Rod (LBR) fire-rated devices include a bottom fire bolt.

\*QED213 available with HMS strike only.

**Other Options**

<b>8FT</b>	Vertical rod kit for 8FT door application
<b>48"</b>	48" Device (Consult factory for lead-time)

# EXIT DEVICES

## How to Order QED 200 Series Grade 1 Heavy-Duty Narrow Stile Exit Devices

11	Rim Hex Dog	24	CVR Hex Dog
12	Rim Cylinder Dog	25	CVR Cylinder Dog
13	Rim Fire-Rated*	26	CVR Fire-Rated
14	SVR Hex Dog	27	CVR LBR – Hex Dog
15	SVR Cylinder Dog	28	CVR LBR – Cylinder Dog
16	SVR Fire-Rated	29	CVR LBR – Fire-Rated
17	SVR LBR – Hex Dog		
18	SVR LBR – Cylinder Dog		
19	SVR LBR – Fire-Rated		

605	Bright Brass
313AN	Anodized Duranodic Bronze
626	Satin Chrome

KD	Keyed Different
KA	Keyed Alike
SK	Special Keying
	-Construction Keyed
	-Construction Master Keyed
	-Maison Keyed
	-Master Keyed
	-Grand Master Keyed
	-Great Grand Master Keyed
ZB	Zero Bitted

Base Part Number								
Series	Function	Size	Height	Finish	Keyway	Keying	Strike**	Notes
QED2	15	36"	7FT	313AN	BF	KD	ALS	XXXX

QED2xx	Narrow Stile Exit Device
--------	--------------------------

36"	36" Device
48"	48" Device

7FT	7 ft Rod
8FT	8 ft Rod

BF	BEST "F" SFIC
KW	Kwikset "KW"
WE	Weiser "E"
SC	Schlage "C"
GA	Yale "GA"
LA	Sargent "LA"
LC	Less Cylinder

ALS	Aluminum Door Strike
HMS	Hollow Metal Door Strike

### Example

If you ordered: QED215 36" 7FT 626 BF KD

You would get: Grade 1 Heavy-Duty Narrow Stile Surface Vertical Rod Exit Device with Cylinder Dogging for a 7' Door, in Brushed Chrome Finish, SFIC "F" Keyway, Keyed Different.

#### NOTE:

\*QED213 available with HMS strike only.

\*\*Only for Rim devices.



**Escutcheon Trims Sierra (E)**

Available in: 605, 613, 626



**Escutcheon Trims Summit (M)**

Available in: 605, 613, 626



**Escutcheon Trims Slate (A)**

Available in: 605, 613, 626



Model/Series	Functions	Style	Cylinder Type	Qty
<b>QET220</b>	Dummy Lever Escutcheon (ANSI 02)	E/M/A	—	6
<b>QET230</b>	Passage Lever Escutcheon (ANSI 14)	E/M/A	—	6
<b>QET260</b>	Keyed Lever Escutcheon (Classroom, ANSI 08)	E/M/A	Mortise	6
<b>QET270*</b>	Night Latch Lever Escutcheon (Storeroom, ANSI 03)	E/M/A	Rim	6
<b>QET280</b>	Night Latch Lever Escutcheon (Storeroom, ANSI 09)	E/M/A	Mortise	6

**NOTES:**

613 Finish trims match 313AN finish exit devices.

\* Not recommended for use on exit devices with vertical rods.

**Escutcheon Trims Pull & Flat Plates**

Available in: 605, 613, 626



Dummy Pull  
QET225



Night Latch Pull  
QET275



Flat Plate  
QET290


Model/Series	Functions	Style	Cylinder Type	Qty
<b>QET225</b>	Dummy Pull Escutcheon (ANSI 02)	L	—	6
<b>QET275*</b>	Night Latch Pull Escutcheon (ANSI 03)	L	Rim	6
<b>QET290</b>	Flat Plate Escutcheon (ANSI 01)	L	—	6

**NOTES:**

\* Not recommended for use on exit devices with vertical rods.

# EXIT DEVICES

## QET 200 Series Grade 1 Heavy-Duty Narrow Stile Exit Trims

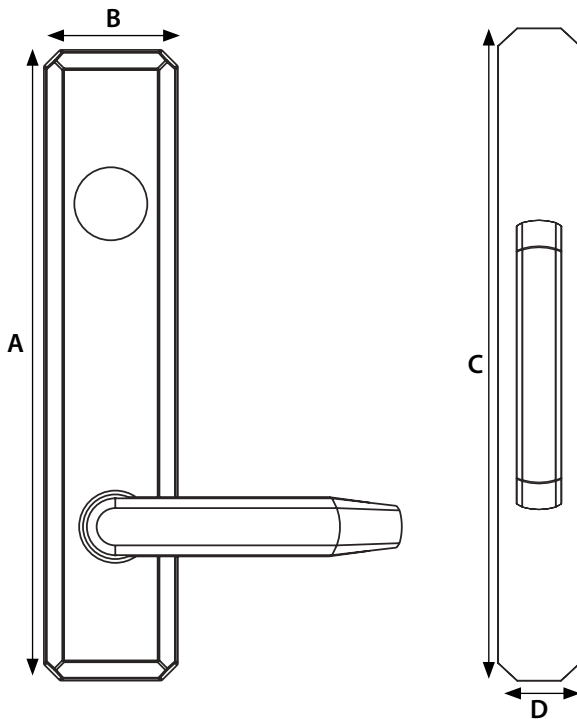

DIMENSIONS			
A	B	C	D
7.83"	1.69"	13.88"	1.76"
198.88mm	42.93mm	352.55mm	44.70mm

Functions	Description	
<b>QET220</b>	Dummy Lever Escutcheon	Used for door pull when device is dogged or as matching inactive trim. No mechanical operation. (ANSI 02)
<b>QET225</b>	Dummy Pull Escutcheon	Used for door pull when device is dogged or as matching inactive trim. No mechanical operation. (ANSI 02)
<b>QET230</b>	Passage Lever Escutcheon	Levers always unlocked and always free for immediate ingress. (ANSI 14)
<b>QET260</b>	Keyed Lever Escutcheon	Key locks & unlocks lever (operates same as classroom function). (ANSI 08)
<b>QET270*</b>	Night Latch Lever Escutcheon	Lever always locked, key retracts latch for entrance (operates same as storeroom function). (ANSI 03)
<b>QET275*</b>	Night Latch Pull Escutcheon	Outside always locked, key retracts latch for entrance (operates same as storeroom function). (ANSI 03)
<b>QET280</b>	Night Latch Lever Escutcheon	Key locks & unlocks lever. Device is locked when key is removed. (ANSI 09)
<b>QET290</b>	Flat Plate Escutcheon	Blank trim plate—used to cover existing door prep for an exit-only application. (ANSI 01)

**NOTES:**

\*Not recommended for use on exit devices with vertical rods.

