
SL-9

Strikes

4800 Series, MS4804

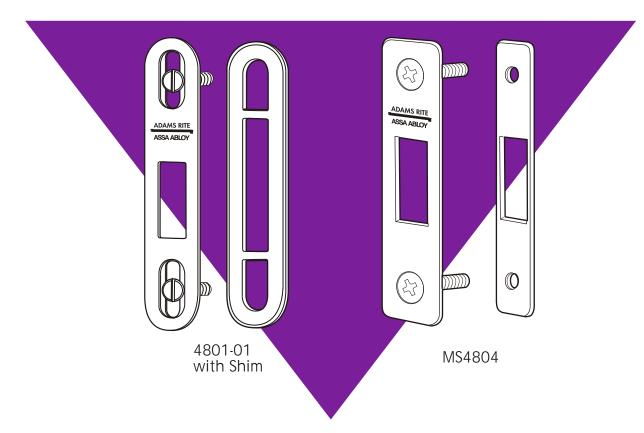

4800 Series

V Function

With vertical adjustment to accommodate door/jamb misalignment and a shim system for horizontal positioning to match various jamb bumper designs, 4800 Series strikes can be fit to nearly any sliding door using a mortised MS1847 Series lock or latch. 4801 strikes are furnished with sheet metal screws for metal jamb installation. 4802 strikes are furnished with machine screws and tee nuts which are installed on the back side of jamb to provide the strongest possible anchorage in wood.

Material

Steel, heat treated. Shims are ABS plastic. Zinc (603) finish. For other finishes contact factory.

MS 4804

▼ Function

Provides a strike equal to the strength of the stainless steel bolt of the MS1847 Deadlock: tested to 1,000 lbs. of force. This strength exceeds by far the standards of the Architectural Aluminum Manufacturers Association as well as the strictest current municipal security ordinance.

▼ Faceplate

1/16" x 3/4" x 3-3/8". Steel, plated for corrosion resistance. MS4804-10 available in Stainless Steel.

▼ Reinforcing Plate

1/16" x 1/2" x 3-3/8". Steel, plated for corrosion resistance. Tapped for furnished #10-32 flathead screws.






4800 Series, MS4804 Strikes

DIMENSIONS

INCHES MILLIMETERS Nominal, subject to tolerance extremes.




4800 Series


PART NO.	SHIMS	DIMENSION 'A'	APPLICATION
4801	None	0"	MFTAL JAMBS
4801-01	1	3/32" 2.4	(Furnished with
4801-02	2	3/16" 4.8	two #8 x 1 sheet metal screws.)
4801-03	3	9/32" 7.1	metal screws.)

PART NO.	SHIMS	DIMENSION 'A'	APPLICATION
4802	None	0"	WOOD JAMBS
4802-01	1	3/32" 2.4	(Furnished with two #8-32 x 7/8 machine
4802-02	2	3/16" 4.8	screws and two
4802-03	3	9/32" 7.1	tee nuts.)

INSTALLATION



	HOLE SIZE
METAL JAMB APPLICATION	.120 (No. 31
4801 SERIES	3.0 DRILL)
WOOD JAMB APPLICATION	.213 (No. 3
4802 SERIES	5.4 DRILL)



CLEARANCE HOLE FOR #10 SCREW ELONGATED TO ALLOW VERTICAL ADJUSTMENT OF STRIKE 2.562 65.0 MS4804 0 INSERT REINFORCING PLATE THROUGH BOLT .62 CLEARANCE HOLE 15.7

HOW TO ORDER

Specify quantity and Part Number. Add dash number for 4800 Series (See table above). Order related hardware separately.

STANDARD PACKAGE

All strikes are individually packaged in envelope with screws and shim if required.