
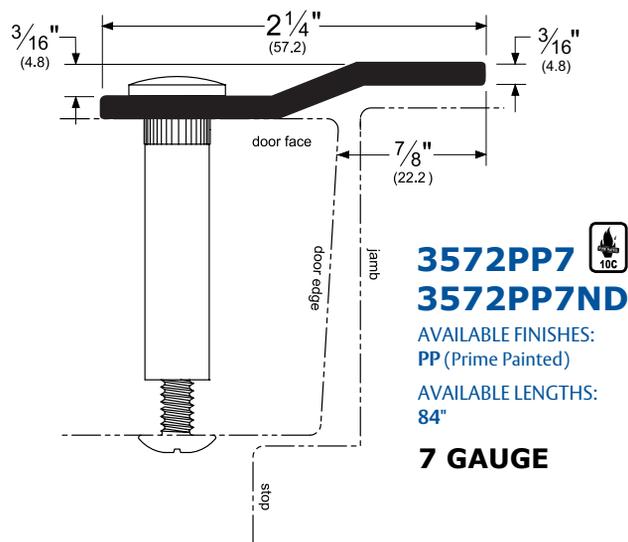


ASTRAGALS AND MEETING STILES

Offset Security Bar


- For use on single outswing wood or metal doors.
- Covers gap between the door and jamb for the full door height, preventing prying and manipulation.
- Excellent for classroom doors opening onto exterior walkways (specified and approved by major school districts).
- 3572SP supplied drilled 12" on center with 1/4" holes.
- 3572SPND ("no drill") supplied undrilled.
- Thru-bolts are included when drilled only.

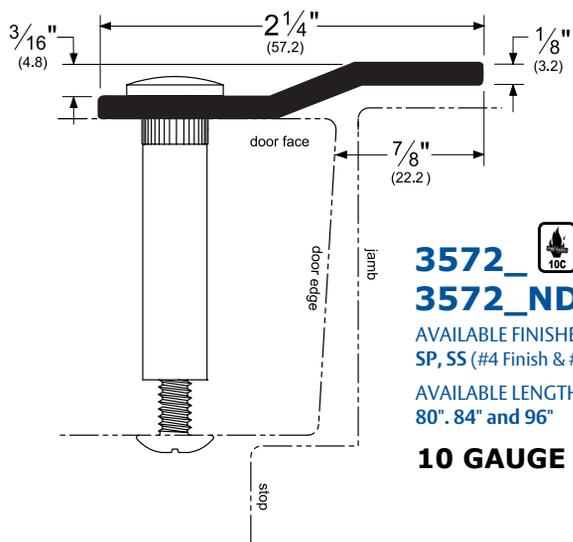

Security Astragal

- Automatic security astragal for outswing pairs of wood and metal doors.
- Discourages manipulation of panic-type hardware.
- Astragal is held flush against other door by 1/2" thick cam (cam and mounting screws included).
- Anodized aluminum with vinyl seal and stainless steel operating spring.
- Either door may be active without requiring a coordinator.
- Only available in 86" and 96" lengths. Parts can be trimmed 12" maximum from each end.
- Should be mounted prior to attaching panic hardware to eliminate the problem of interference.
- Must be installed on the inside of a pair of outswing doors.

378_
AVAILABLE FINISHES:
C, D, G

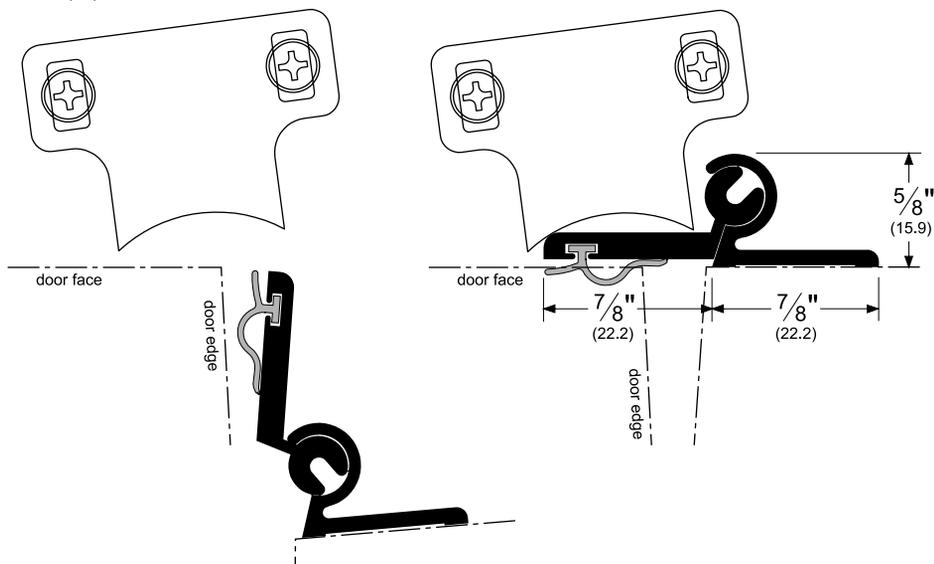

▲ AVAILABLE FINISHES FOR PRODUCTS SHOWN ON THIS PAGE (see General Information section for finish chart)

C (Clear Anodized) • D (Dark Bronze Anodized) • G (Gold Anodized) • SP (Galvanized Steel) • SS (Stainless Steel)

Special finishes available upon request