

VON DUPRIN®

GUARD-X

Exit alarm lock



Overview

GUARD-X provides secure, alarmed code-compliant protection for secondary exits. GUARD-X exit alarm lock readily identifies the door on which it is mounted as an emergency exit and secures the opening against unauthorized use. It is ideal for deterring theft in restaurants and retail establishment such as: discount stores, grocery stores, drug stores, clothing stores and sporting goods stores.



Features and benefits

- UL listed for panic exit hardware (UL305)
- Tested in accordance to ANSI A156.3 Grade 1 panic hardware (250,000 cycles)
- Quick installation with an easy-to-use adhesive back template
- Non-handed design allows installer to mount for either hand by just removing and reversing the "Emergency Exit - Alarm Will Sound" sign built into the device
- Three finishes available: SP28, 313, 315
- Heavy duty construction with stainless steel deadbolt with cast aluminum latch case
- Only authorized person with a key can re-latch or reset the alarm after unauthorized exit
- 100-decibel alarm
- Armed and disarmed by key
- Alarm is powered by standard 9V battery or hardwired using optional PT790 power supply


Dimensions - outside trim

| | |
|-----------------------------------|--|
| Touchbar height to finished floor | 40" (1016mm) at center |
| Door width range | 36" to 48" (914mm to 1219mm) |
| Touchbar projection | |
| Neutral | 4 1/8" (103mm) |
| Depressed | 2 3/4" (70mm) |
| Latch case housing | 7" X 4 1/16" X 4 1/8" (179mm X 103mm X 105mm) |
| Device length | 32 1/2" (826mm) |
| Minimum stile requirement | |
| Single door | 5 7/8" |
| Double door | 6 1/4" |


Note: Von Duprin trim does not thru-bolt to the Guard-X Ives door pulls 8102-6 and 8105-6 offer dimension that align and thru-bolt to the Guard-X exit lock - order separately from Ives.

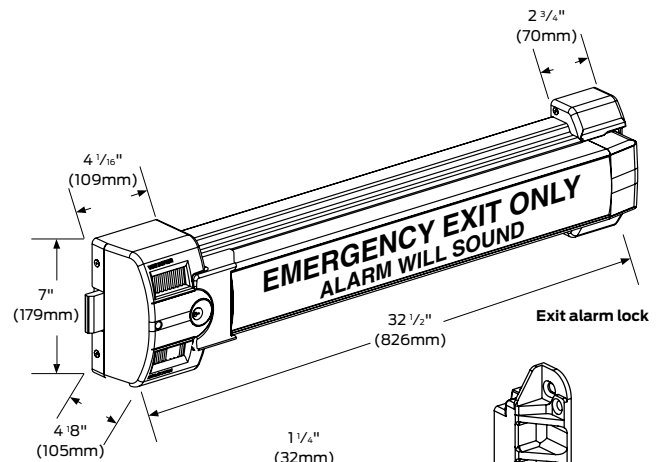


267*
Roller strike




2100T
1 31/32" (50mm) protection




Ives 8102-6



2609
Double door strike



2300T
2" (51mm) protection



Ives 8105-6

To order, specify

- **Model number 2670**- Includes strike, screw pack and battery.
- **Finish** - US28, 313AN or 315AN
- **French or Spanish sign, when required** - English with Braille is standard.

Accessories

- **Sex nuts and bolts (6 #325)**- when required.
- **PT790 9-volts external power supply** - when required.
- **210DT X 050140 or 230DT X 050140** - when required.
- **3216 rim cylinder** - when required.

Allegion, the Allegion logo, Von Duprin and the Von Duprin logo are trademarks of Allegion plc, its subsidiaries and/or affiliates in the United States and other countries. All other trademarks are the property of their respective owners.

About Allegion

Allegion (NYSE: ALLE) creates peace of mind by pioneering safety and security. As a \$2 billion provider of security solutions for homes and businesses, Allegion employs more than 7,800 people and sells products in more than 120 countries across the world. Allegion comprises 23 global brands, including strategic brands CISA®, Interflex®, LCN®, Schlage® and Von Duprin®. For more, visit www.allegion.com.

aptiQ ■ LCN ■ SCHLAGE ■ STEELCRAFT ■ VON DUPRIN



© 2014 Allegion
010107, Rev. 03/14
www.allegion.com/us