




Folger Adam®



**These industrial grade electric strikes
are used with cylindrical locks,
mortise locks* and mortise exit devices**

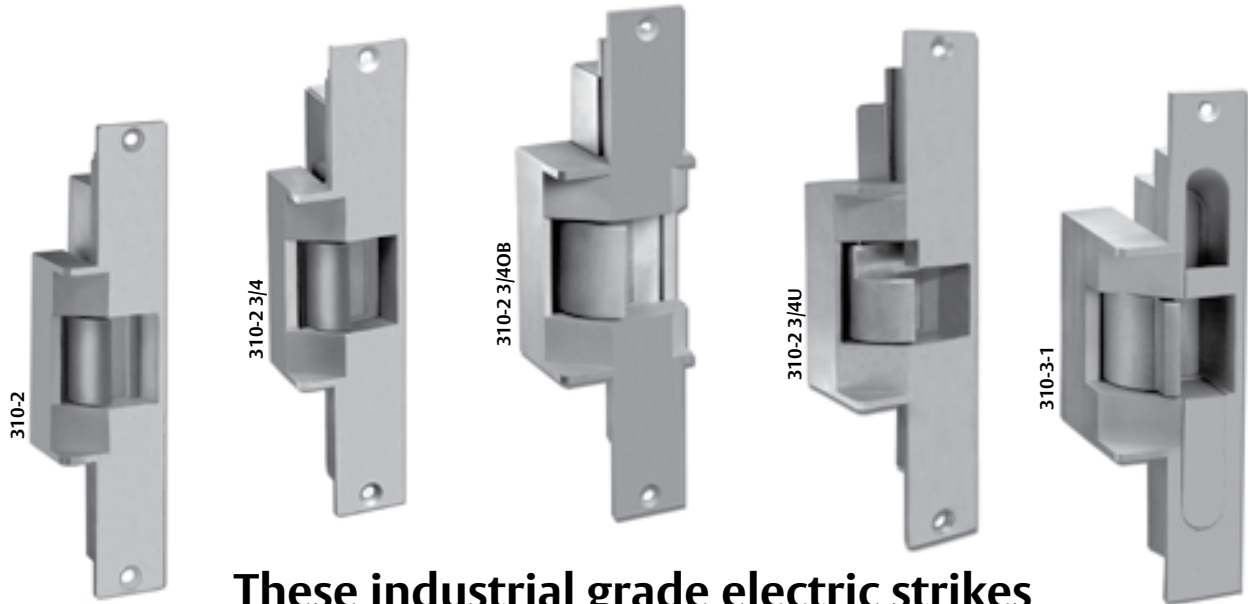

fire rated



UL 1034
burglary listed



grade 1

Applications

mortise locks
without deadbolts



310-2
For a 1/2" or 5/8" throw latchbolt (without deadbolt) on single and pairs of doors
• 1/2" keeper standard

310-2 3/4U
For use with a pre-assembled or unit lock
• 3/4" U keeper standard

mortise locks
with deadbolts



310-2-3/4
For a 3/4" throw latchbolt (without deadbolt) on single doors
• 3/4" keeper standard

310-3-1
For a lockset with both a 3/4" throw latchbolt and a 1" throw deadbolt
• Deadbolt must be retracted manually
• Position of block within cavity is adjustable for RH and LH applications
• 1" keeper standard

cylindrical locksets



310-2 3/4OB
For a pair of doors, without a door coordinator, which are equipped with a lock having a 3/4" throw latchbolt (without deadbolt)
• 3/4" keeper standard

**Note: These products will require relocation of the center line when used with mortise locks. Consult HES customer support regarding use with Best 40 Series.*



Folger Adam®



Specifications

- UL 10C, 3 hour single door fire-rated (fail secure only)
- UL 10C, 3 hour double door fire-rated (310-2, 310-2/34OB, 310-3-1, fail secure only)
- CAN4-S104 (ULC-S104) fire door conformant
- UL1034, burglary-resistant listed
- ANSI/BHMA A156.31, Grade 1
- DOD approved
- New York City accepted
- NFPA-252 fire door conformant
- ASTM-E152 fire door conformant

Electrical

- .51 Amps @ 12VDC continuous duty
- .25 Amps @ 24VDC continuous duty

Standard Features

- Tamper resistant, heavy-duty construction
- Constructed entirely of stainless steel for strength and corrosion resistance
- Static strength 1,500 lbs.
- Dynamic strength 70 ft-lbs.
- Endurance rating 500,000 cycles
- Horizontally adjustable keeper to allow for door and frame misalignment
- 3/4" keeper depth (310-2 3/4 and 310-2 3/4OB)
- 3/4" U keeper depth (310-2 3/4U)
- 1/2" keeper depth (310-2)
- 1" keeper depth (310-3-1)
- Non-handed
- Fail Secure (standard)
- Plug-in connector
- Five year limited warranty

Optional Features

- Fail Safe
- LCBMA - Latchbolt & Locking Cam Monitor with Auxiliary Switch (all except 310-2 3/4OB)

Accessories

- 310-2-3 - Strike latch guard (astragal)
- 152 - Universal mounting tabs
- 2001 - Plug-in bridge rectifier
- 2001-1 - Wire-in bridge rectifier
- 2004 - ElectroLynx® adapter
- 2005 - SMART Pac II™
- 2006P - Plug-in buzzer
- 2003 - MOV

Finishes

- 630 - Satin stainless steel finish
- 605 - Bright brass finish
- 606 - Satin brass finish
- 612 - Satin bronze finish
- 613 - Bronze toned finish
- 629 - Bright stainless steel finish