



ROFU[®] HIGH SECURITY ELECTRIC STRIKE MODEL 1470/3470


1470 AND 3470 - SERIES, FACEPLATE SIZE 1³/₈" x 9"

MODEL 1470 — Fail - Secure (Non Fail - Safe)

MODEL 3470 — Fail - Safe

Electric strikes for used to retrofit Folger Adams 310-2³/₄.

For Commercial, New or Retrofit Uses

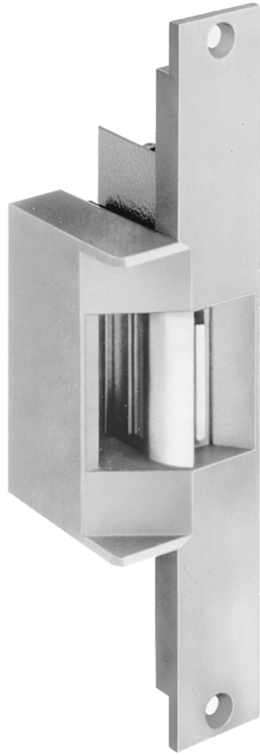

1470/3470
Non -Handed

Standard Features

- Stainless Steel Faceplate
- Frame Type - Hollow Metal, Aluminum or Wood
- Corrosion - Resistant case and moving parts.
- Tamper Strength Test - 1700 lbs (765kg)
- Cycle Test 500,000 cycles
- Keeper Depth - **5/8"** Maximum Latch Projection Possible with 1/8" Door/Frame Clearance - **3/4"**
- Strike Depth 1.50" Overall
- Reversible - Non Handed. (w/o deadbolt)
- **Fully Tamper Proof Horizontal Adjustment**
To compensate for misalignment and warpage.
- 2" Jamb Modification
- Limited Warranty - 36 Months

Available in the following Voltages and Finishes:

Specify Finish xUS32D, xUS40 or xUS3 (Plated)

Voltage, Fail Secure x01=8-16VAC/3-6VDC, x05=12VAC/12VDC, x08=24VAC/24VDC

Voltage, Fail Safe x06=12VDC, x09=24VDC

Optional Features:

- Cutout for deadbolt (Specify 1470B-LH or RH / 3470B-LH or RH)





LINE ART FOR 1470/3470

**HOLLOW METAL
JAMB PREPARATION**

