

# Hospital Push/Pull Latches




Innovation, Quality,  
Customer Service...

## 6600 Series Trim with Mortise Lock Body

### Standard Features

- Mortise lock body provided – specify function (see page C-16 to C-17 for details)
- Mortise lock body only available in 2-3/4" backset
- 4-7/8" ASA strike supplied standard
- 3/4" latch bolt throw
- Mortise lock cylinder and cam not provided
  - Uses clover leaf-type cam – Best® C258 or equal (except 6638 and 6645 models, which use Best® C293 or equal on outside)
  - 6 Pin Cylinder = 1-1/8" long
  - 7 Pin Cylinder = 1-1/4" long
- 1-3/4" standard door thickness minimum (specify if greater than 1-3/4")
- Meets ADA requirements
- All mounting hardware goes through mortise lock body prep – no additional prep required
- One continuous spring provides a smoother operation and an extended life for the unit
- Trim is non-handed; however, the mortise lock body is handed (can be changed in field)
- Can be mounted vertical or horizontal (with handles pointing toward hinge edge of door)
  - For mortise lock functions where thumb turn or cylinder will be used, either mount the trim horizontal or select "J" option (Junior Covers) to achieve required clearance
- Handles can be mounted up or down by simply rotating trim 180°
- UL Listed in U.S.A and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"

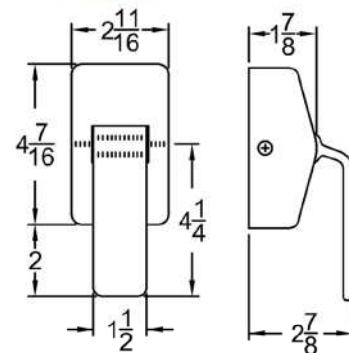

### How to Order:

Example: 6610 LH - US32D - AM

#### Model:

- 6610 = Passage
- 6632 = Privacy
- 6637 = Communicating
- 6638 = Public Entrance
- 6641 = Institutional
- 6645 = Hotel
- 6653 = Dormitory
- 6654 = Entry/Office
- 6656 = Classroom
- 6658 = Storeroom

#### Lock Body Handing:

- LH = Left Hand
- RH = Right Hand
- LR = Left Hand Reverse
- RR = Right Hand Reverse

#### Finish:

- US32D
- US26D
- US32
- US26
- US10B
- US10
- US3
- US4

#### Options, if Needed:

- H • AM • L • PL • PS • EX • X • J • RC • SEC • THICK
- EL • EU • RX • AB • PLA • P (See pages C-3 to C-5 for details)

\*Brand names are trademarks or registered trademarks of their respective companies.



Architectural Builders Hardware Manufacturing, Inc.  
1222 Ardmore Avenue, Itasca, IL 60143  
Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224  
Web: www.abhmf.com • Email: abhinfo@abhmf.com

2014 ABH Mfg., Inc. C-15

DISTRIBUTED BY

